

HG-SERIES

Molded Case Circuit Breakers & Earth Leakage Circuit Breakers



LV & MV Circuit Breakers

MOLDED CASE CIRCUIT BREAKERS & EARTH LEAKAGE CIRCUIT BREAKERS

CONTENTS

16 External Structure and Contents of Nameplate / 18 Standards and Certifications /
19 Products Selection Table / 33 Accessories / 53 Technical Information /
69 Characteristic Curves & Dimensions / 121 Order Information / 158 Maintenance and Certifications

HG-SERIES

Globalization of Technology

HG-SERIES

Molded Case Circuit Breakers & Earth Leakage Circuit Breakers

Maximized Selectivity and Safety with Various Products Range & Breaking Capacity!

Various Product Range 30 - 800 AF

Maximized Breaking Capacity 16 - 85 kA (at 460 V)

$I_{cs} = 100\% I_{cu}$

Rated Insulation Voltage (U_i) 1,000 V





HYUNDAI
HGM 100H

100AF 50/60Hz 40°C
Ui 1000V Uimp 8kV
Ue(V) Icu(kA)
660 / 690V - 8kA
480 / 500V - 14kA
440 / 460V - 26kA
380 / 415V - 35kA
220 / 240V - 65kA
Ics = Icu 75%

MADE IN KOREA

ON

100A

CE Cat. A
IEC 60947-2

PUSH TO TRIP

1.0 0.8
0.9 Ir(x In)

LOAD

HG-SERIES

Adjustable Ratings Design

Optimized Protection Based on the Load Conditions!

Adjustable Rated Currents (Molded Case Circuit Breakers)

30 - 250 AF (0.8 - 0.9 - 1 X In), 400 - 800 AF (0.63 - 0.8 - 1 X In)

Adjustable Rated Residual Currents (Earth Leakage Circuit Breakers)


100 - 300 - 500 - 1,000 (mA)

Adjustable Residual Current Off-Time (Earth Leakage Circuit Breakers)

0 - 200 - 500 - 1,000 (ms)

Reinforcement of Protective Coordination


Rated Short-Circuit Current by AF, (Ics = 100 % Icu, at 440/460 V)

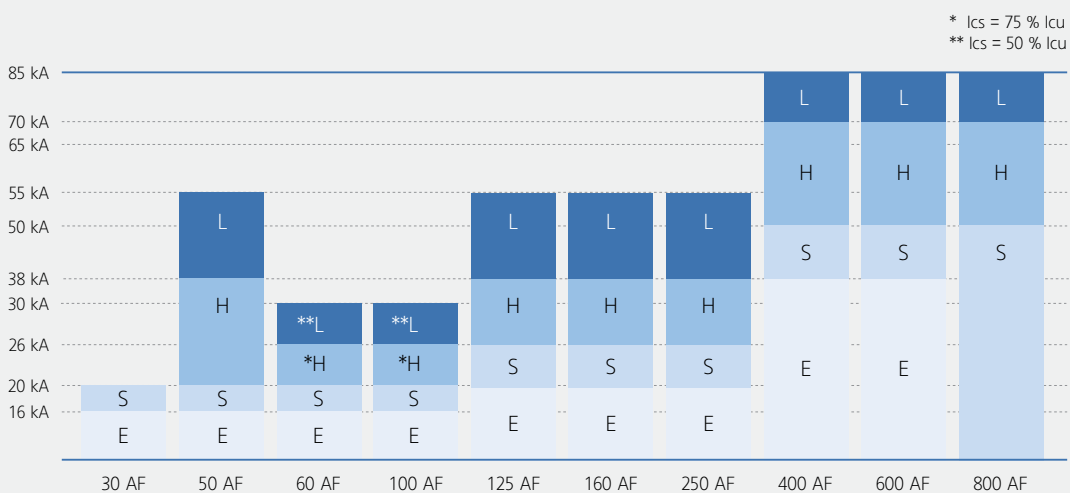



30 - 250 AF

0.8 - 0.9 - 1 times
of rated current

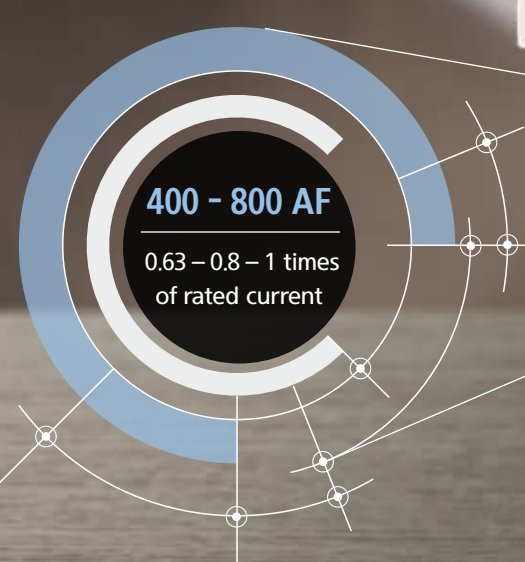

400 - 800 AF

0.63 - 0.8 - 1 times
of rated current



HYUNDAI
HGM 125H

125AF 50/60Hz 40°C
 Ui 1000V Uimp 8kV
 Ue(V) Icu(kA)
 660 / 690V - 8kA
 480 / 500V - 26kA
 440 / 460V - 38kA
 380 / 415V - 50kA
 220 / 240V - 85kA
 Ics = Icu 100%

MADE IN KOREA

CE Cat. A
 IEC 60947-2

125A

PUSH TO TRIP

1.0 0.8
 0.9 Irt(x In)

HG-SERIES

Advanced Breaking Performance and Various Selectivity

- Various Product Range: 30 - 800 AF, 10 Frames
- Standardized Size of Accessories, Compatible with MCCB and ELCB
- Standardized Height of Products by Frame: 30 - 250 AF (68 mm), 400 - 800 AF (110 mm)


30, 50, 60, 100 AF

50, 125 AF


160, 250 AF



Size
Compatibility
Public Using
Accessories

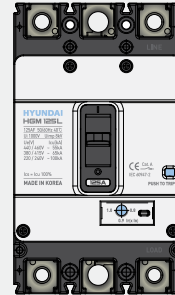

MCCB

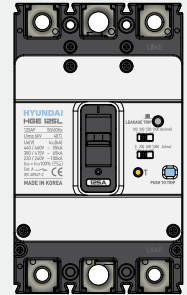

ELCB

400 AF

630, 800 AF

(unit: mm)



HG-SERIES

HGM Type Molded Case Circuit Breakers

Ui: 1,000 V Uimp: 8 kV Ics = 100 % Icu

Maximized Insulation Performance

- Rated insulation voltage, Ui: 1,000 V
- Rated impulse withstand voltage, Uimp: 8 kV

High Breaking Capacity

- 16 - 30 kA at 460 V (100 AF)
- 16 - 55 kA at 460 V (125 - 250 AF)
- 38 - 85 kA at 460 V (400 - 800 AF)

Cable Insulation Performance Suitability


In case of continuing abnormal conditions such as welding of main contact after trip, handle is not available to move 'OFF position' in accordance with IEC 60947-2 cable insulation performance. Also, it is possible to maintenance free by checking a contact condition by the handle.

Adjustable Rated Current

As applying to adjustable rated current design, it is possible to protect circuit optimally according to the load factor. Adjustable range of rated currents.

(Molded case circuit breakers)


- 30 - 250 AF: 80 % - 90 % - 100 % of rated current
- 400 - 800 AF: 63 % - 80 % - 100 % of rated current



Characteristic Curve
(I - t Curve)

Dial Sealing Device (Option)

Prevent removal of the protection cover from body and any operating of current setting value.



HGM 125H

125AF 50/60Hz 40 °C
Ui 1000V Uimp 8kV

Ue(V)	Icu(kA)
660 / 690V	~ 8kA
480 / 500V	~ 26kA
440 / 460V	~ 38kA
380 / 415V	~ 50kA
220 / 240V	~ 85kA
Ics = Icu 100%	

CE Cat. A
IEC 60947-2



PUSH TO TRIP





HG-SERIES


HGM Type Molded Case Circuit Breakers

- High Performance & Coordination

Service Breaking Capacity ($I_{cs} = 100\% \times I_{cu}$)

Service breaking capacity, '100 % X I_{cu} ' is realized by enlarging breaking capacity with internal limit current device.

- 30 - 800 AF
- 16 - 55 kA @ 460 Vac
(HGM100 AF H Type $I_{cs} = 75\% I_{cu}$, HGM100 AF L Type $I_{cs} = 50\% I_{cu}$)

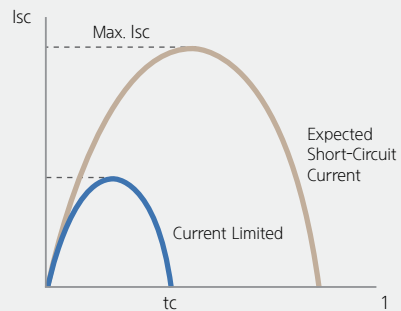

Current Limiting Characteristics

Available to Various Low Voltage System Protections


It is available to adapt various low voltage system protections such as 'Discrimination' and 'Cascading' with limit current characteristic and high breaking capacity.

Discrimination

It is a low voltage system protection to selectively separate fault point from system to minimize influence of fault. In this protection type, only circuit breaker installed at a fault point is operated while the other feeder can be used continuously.

Cascading

In this protection type, upstream circuit breakers can be tripped earlier than downstream circuit breaker for back up protection. So, it is applied to the smaller breaking capacity than the calculated value at down stream circuit.

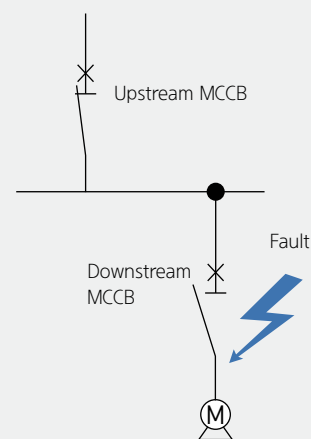



Various Low Voltage System Protections



HG-SERIES

HGM Type Earth Leakage Circuit Breakers

Ics = 100 % Icu Uimp = 6 kV

- Standardized Size of Accessories, Compatible with MCCB
- Adjustable Residual Current and Current Cut-Off Time
- Application of 3 Phase Power Supply System, Enabling Normal Operation Under One Phase Loss Fault




Dimensions and Specifications Compatibility with MCCB

- Service breaking capacity, $I_{cs} = 100\% I_{cu}$
- Rated impulse withstand voltage, $U_{imp} = 6\text{ kV}$

Residual Current Protection Characteristics


- Prevent damage from reverse connection: It is possible to prevent circuit damage under reverse connection condition.
- Prevent unnecessary malfunction on temporary leakage condition.
- Adjustable residual current and cut-off time.
- 3 Phase power supply system: Enables normal operation under one phase loss condition by adapting 3 phase power supply system.
- Protecting an inverter load safely from ground fault by adapting IC filter.

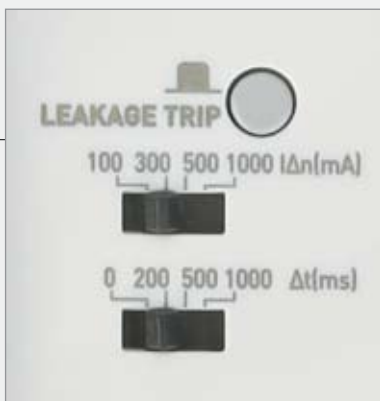



Adjustable Residual Current and Cut-Off Time

Part	Adjustable Residual Current				Cut-Off Time				
	30 mA	100 mA	300 mA	500 mA	1,000 mA	0 ms	200 ms	500 ms	1,000 ms
Previous ELCB	Fixed	3 steps			-	Fixed	-	-	-
HG-ELCB	Fixed	4 steps				4 steps			

- Adjustable residual current and cut-off time in 4 steps.
- Coordination protection between upstream and downstream circuit breakers by adjusting residual current and cut-off line.

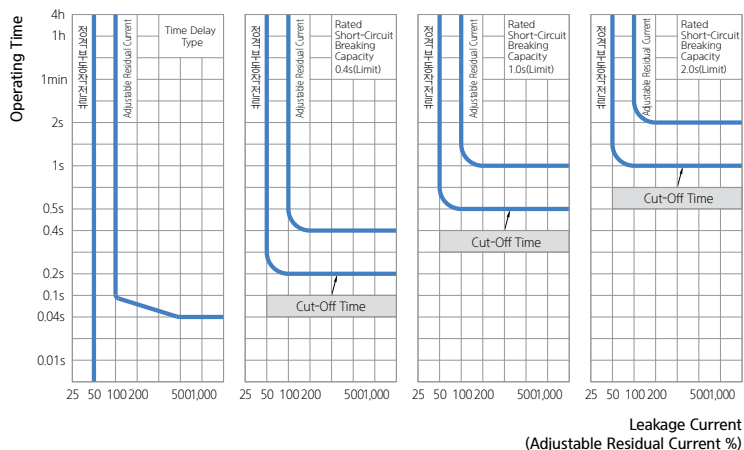

External Structure and Contents of Nameplate

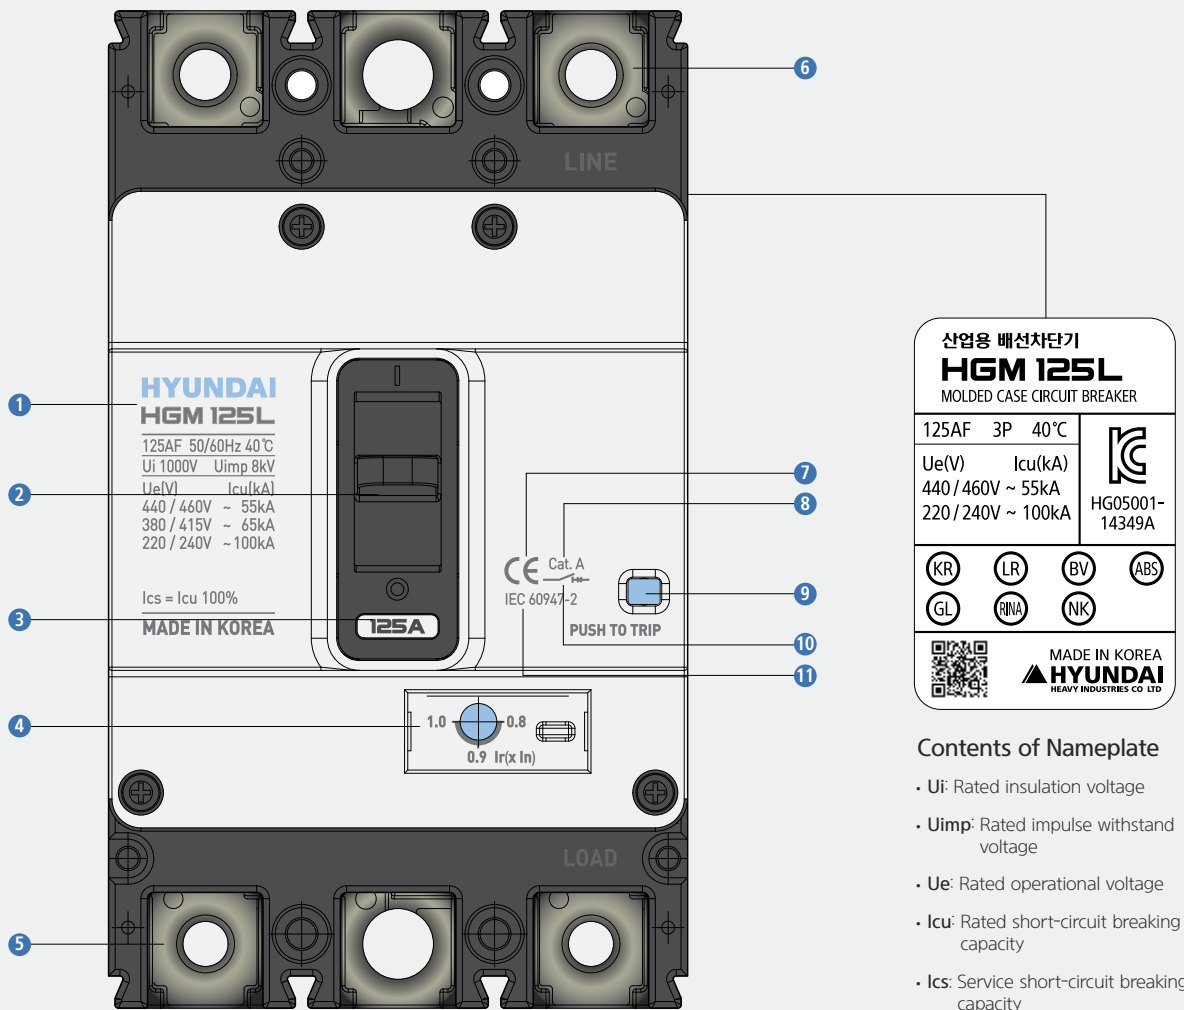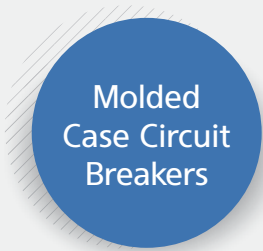


Contents of Nameplate

- **Ui**: Rated insulation voltage
- **Uimp**: Rated impulse withstand voltage
- **Ue**: Rated operational voltage
- **Icu**: Rated short-circuit breaking capacity
- **Ics**: Service short-circuit breaking capacity


Molded Case Circuit Breakers (MCCB)

- | | | |
|--------------------|------------------------|---|
| 1 Model Name | 5 Load Side Terminal | 9 Trip Button |
| 2 Operating Handle | 6 Line Side Terminal | 10 Cable Insulation Performance Suitability |
| 3 Rated Current | 7 CE Marking | 11 Standards |
| 4 Adjusting Knob | 8 Utilization Category | |

Earth Leakage Circuit Breakers

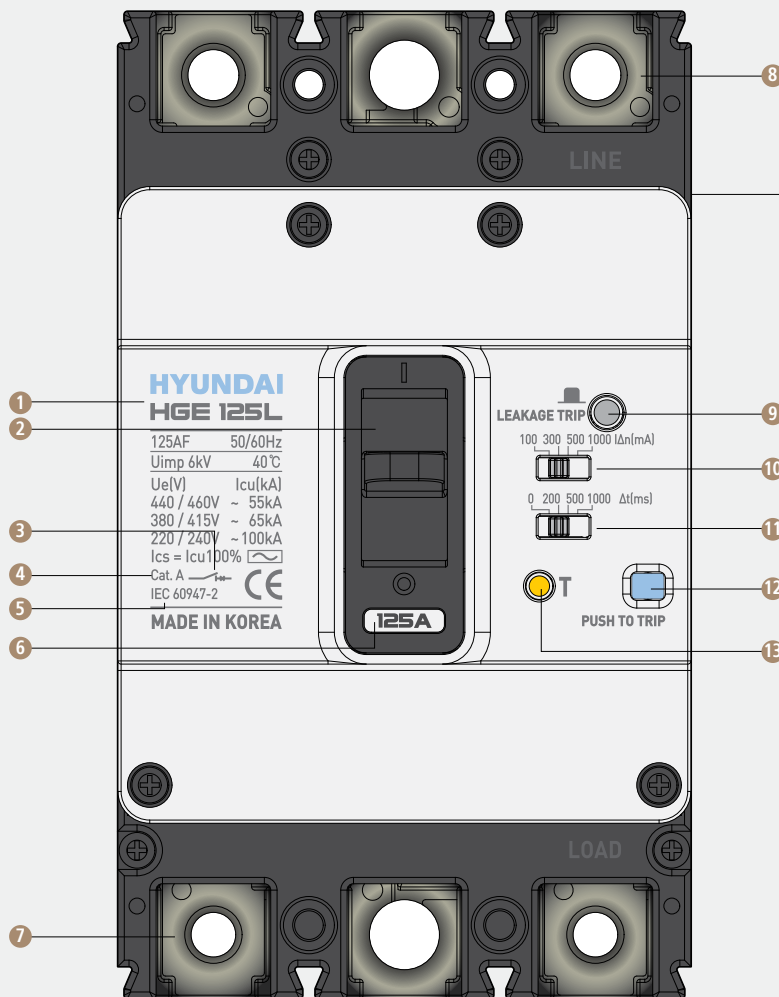

산업용 누전차단기
HGE 125L
EARTH LEAKAGE CIRCUIT BREAKER

125A	3P	40°C
Ue(V)	Icu(kA)	 HG05001-14347A
440 / 460V ~ 55kA		
220 / 240V ~ 100kA		

HG05001-14347A



MADE IN KOREA
HYUNDAI
HEAVY INDUSTRIES CO. LTD

Contents of Nameplate

- **U_i**: Rated insulation voltage
- **U_{imp}**: Rated impulse withstand voltage
- **U_e**: Rated operational voltage
- **I_{cu}**: Rated short-circuit breaking capacity
- **I_{cs}**: Service short-circuit breaking capacity

Earth Leakage Circuit Breakers (ELCB)

- | | | |
|--|--------------------------|--|
| ① Model Name | ⑤ CE Marking | ⑩ Rated Residual Current Setting Switch |
| ② Operating Handle | ⑥ Rated Current | ⑪ Rated Residual Current Cut-Off Time Setting Switch |
| ③ Cable Insulation Performance Suitability | ⑦ Load Side Terminal | ⑫ Trip Test Button |
| ④ Utilization Category | ⑧ Line Side Terminal | ⑬ Leakage Trip Test Button |
| | ⑨ Leakage Trip Indicator | |

Standards and Certifications

Standards

Standards

KS C 8321

Molded case circuit breakers for industrial uses

KS C 4613

Circuit breaker incorporating residual current protection for industrial Uses (CBR)

International Standards

IEC 60947-1

Low voltage switchgear and controlgear, part 1 (General rules)

IEC 60947-2

Low voltage switchgear and controlgear, part 2 (Circuit breakers)



Approvals and Certifications

HG-Series MCCB has acquired the certification from the TEST agency registered in STL.

- CB certification (DEKRA)
- Safety certification scheme for electrical applications
- KS (Korean industrial standards)
- Marine approvals (8's classifications)



Vibration/Shock Withstand Test Certification Acquisition

HG Series MCCB has acquired the vibration/shock withstand test certification in accordance with IEC 60068-2-6 standard which is the required level of IACS, international vessel inspection institute.

- Vibration resistant: 2 - 13.2 Hz - ± 1 mm
- Shock resistant: 13.2 - 100 Hz - ± 0.7 g



Our services

Testing, inspections, certification

DEKRA provides certification of management systems as well as technical support, testing and certification of a wide range of products throughout the life cycle.

Products Selection Table

Molded Case Circuit Breakers (HGM Type)	20
ZCT Molded Case Circuit Breakers (ZCT / HGM□Z Type)	24
Earth Leakage Circuit Breakers (HGE Type)	28


Model Selection Table

MCCB (HGM Type): 30 - 250 AF

Things in Common

Rated Insulation Voltage, U_i	1,000 V
Rated Operational Voltage, U_e	690 V
Impulse Withstand Voltage, U_{imp}	8 kV
Protective Function	Overload, short-circuit and instantaneous protection

Suitability for Isolation	Yes
Utilization Category	A
Polution Degree	3
Reference Standard	IEC 60947-2

Model	HGM30		HGM50				HGM60						
Frame (AF)	30		50				63						
Pole (P)	2, 3, 4 ¹⁾		2, 3, 4 ¹⁾				2, 3, 4 ¹⁾						
Rated current, at 40 °C (A)	16, 20, 25, 32		16, 20, 25, 32, 40, 50				16, 20, 25, 32, 40, 50, 63						
Rated short-circuit breaking capacity [Icu] (kA rms)	Recognition code for order		E	S	E	S	H	L	E	S	H	L	
	AC660/690 V		2.5	5	2.5	5	8	10	2.5	5	7.5	8	
	AC480/500 V		7.5	10	7.5	10	26	35	7.5	10	14	26	
	AC440/460 V		16	20	16	20	38	55	16	20	26	30	
	AC380/415 V		16	20	16	20	38	55	16	20	26	30	
AC220/240 V		35	50	35	50	85	100	35	50	50	50		
DC250 V (2P)		5	10	10	15	20	30	10	15	15	15		
Service breaking capacity [Ics = % Icu]		100	100	100	100	100	100	100	100	75	50		
Endurance (Durability)	Mechanical		30,000		30,000				30,000				
	Electrical		10,000		10,000				10,000				
Trip Device													
Thermal magnetic	Long time [LT]	Fixed	(1.0) x In		(1.0) x In				(1.0) x In				
		Adjustable	(0.8 - 0.9 - 1.0) x In		(0.8 - 0.9 - 1.0) x In				(0.8 - 0.9 - 1.0) x In				
	Instantaneous [INST]		400 A		16 - 32 A: 400 A, 40 - 50 A: 10 x In				16 - 32 A: 400 A, 40 - 63 A: 10 x In				
Accessory													
Internal	Auxiliary switch AUX		●		●				●				
	Alarm switch ALT		●		●				●				
	Shunt trip SHT		●		●				●				
	Undervoltage trip UVT		●		●				●				
External	Rotary handle	Front contact TFG	●		●				●				
		Extended TFH	●		●				●				
	Motor operator MOT		●		●				●				
	Mechanical interlock MIF		●		●				●				
	Locking device PLD		●		●				●				
	Plug-in	TDM (LINE/LOAD)		● (3P Only)		● (3P Only)		● (3P Only)		● (3P Only)			
		TDM (LINE only)		● (3P Only)		● (3P Only)		● (3P Only)		● (3P Only)			
		TDF (LINE only)		● (3P Only)		● (3P Only)		● (3P Only)		● (3P Only)			
		TDA (1 row)		● (3P Only)		● (3P Only)		● (3P Only)		● (3P Only)			
		TDA (2 row)		● (2, 3P Only)		● (2, 3P Only)		● (3P Only)		● (2, 3P Only)			
Cage terminal block CTB		●		●				●					
Insulation terminal cover TCF		●		●				●					
Insulation barrier TQQ		●		●				●					
Terminal extensions TBB		-		-				-					
Installation and Dimensions													
Connection/Installation	Front connection		Terminal screw										
	Rear connection		Horizontal/Vertical/Front wiring										
	Plug-in		Switchboard type (Line & Load, Line only), Distribution board type ²⁾										
	DIN rail installation		Possible for using DIN rail adapter			-			Possible for using DIN rail adapter				
Dimensions (mm)		a (2/3/4P)		50/75/100	50/75/100	60/90/120	50/75/100						
		b		130	130	155	130						
		c		68	68	68	68						
Weight (kg)	2/3/4P		0.6/0.8/1.0	0.6/0.8/1.0	0.8/1.0/1.3	0.6/0.8/1.0							
Detailed rating and select		122 Page		122 Page				122 Page					
Characteristics curve and outside view		70 - 80 Page		70 - 80 Page				70 - 80 Page					

※ ¹⁾ 4 pole arrangement: Basic specification is R-S-T-N (N-R-S-T is optional).

²⁾ Plug-in: Applicable only 3P.

³⁾ 2P product is just removed versus central pole of 3P product. So, 2P product's dimension is equal to 3P product's dimension.



HGM100				HGM125				HGM160				HGM250			
100				125				160				250			
2, 3, 4 ¹⁾				2, 3, 4 ¹⁾				2 ³⁾ , 3, 4 ¹⁾				2 ³⁾ , 3, 4 ¹⁾			
16, 20, 25, 32, 40, 50, 63, 75, 80, 100				16, 20, 25, 32, 40, 50, 63, 75, 80, 100, 125				100, 125, 150, 160				100, 125, 150, 160, 175, 200, 225, 250			
E	S	H	L	E	S	H	L	E	S	H	L	E	S	H	L
2.5	5	7.5	8	5	7.5	8	10	7.5	8	8	10	7.5	8	8	10
7.5	10	14	26	10	14	26	35	14	20	26	35	14	20	26	35
16	20	26	30	20	26	38	55	20	26	38	55	20	26	38	55
16	20	26	30	20	26	38	55	20	26	38	55	20	26	38	55
35	50	50	50	50	65	85	100	50	65	85	100	50	65	85	100
10	15	15	15	15	15	20	30	15	15	20	30	10	15	20	30
100	100	75	50	100	100	100	100	100	100	100	100	100	100	100	100
30,000				30,000				25,000				25,000			
10,000				10,000				10,000				10,000			
(1.0) x In				(1.0) x In				(1.0) x In				(1.0) x In			
(0.8 - 0.9 - 1.0) x In				(0.8 - 0.9 - 1.0) x In				(0.8 - 0.9 - 1.0) x In				(0.8 - 0.9 - 1.0) x In			
16 - 32 A: 400 A, 40 - 100 A: 10 x In				16 - 32 A: 400 A, 40 - 125 A: 10 x In				10 x In				10 x In			
●				●				●				●			
●				●				●				●			
●				●				●				●			
●				●				●				●			
●				●				●				●			
●				●				●				●			
●				●				●				●			
●				●				●				●			
●				●				●				●			
● (3P Only)				● (3P Only)				● (3P Only)				● (3P Only)			
● (3P Only)				● (3P Only)				● (3P Only)				● (3P Only)			
● (3P Only)				● (3P Only)				-				-			
● (3P Only)				● (3P Only)				-				-			
● (2, 3P Only)				● (3P Only)				-				-			
●				●				●				●			
●				●				●				●			
●				●				●				●			
-				-				●				●			
Terminal screw								Terminal screw, Terminal busbar							
Horizontal/Vertical/Front wiring								Horizontal/Vertical/Front wiring							
Switchboard type (Line & Load, Line only), Distribution board type ²⁾								Switchboard type (Line & Load, Line only) ²⁾							
Possible for using DIN rail adapter				-				-				-			
50/75/100				60/90/120				105/105/140				105/105/140			
130				155				165				165			
68				68				68				68			
0.6/0.8/1.0				0.8/1.0/1.3				1.1/1.3/1.7				1.1/1.3/1.7			
122 Page				122 Page				122 Page				122 Page			
70 - 80 Page				70 - 80 Page				70 - 80 Page				70 - 80 Page			


Model Selection Table

MCCB (HGM Type): 400 - 800 AF

Things in Common


Rated Insulation Voltage, U_i	1,000 V
Rated Operational Voltage, U_e	690 V
Impulse Withstand Voltage, U_{imp}	8 kV
Protective Function	Overload, short-circuit and instantaneous protection

Suitability for Isolation	Yes
Utilization Category	A
Pollution Degree	3
Reference Standard	IEC 60947-2

Model	HGM400				HGM630				HGM800						
Frame (AF)	400				630				800						
Pole (P)	2, 3, 4 ¹⁾				2, 3, 4 ¹⁾				2, 3, 4 ¹⁾						
Rated current, at 40 °C (A)	250, 300, 350, 400				500, 630				700, 800						
Rated short-circuit breaking capacity [Icu] (kA rms)	Recognition code for order	E	S	H	L	E	S	H	L	S	H	L			
	AC660/690 V	5	8	10	14	5	8	10	14	5	8	10			
	AC480/500 V	18	35	50	65	25	45	50	65	45	50	65			
	AC440/460 V	38	50	70	85	38	50	70	85	50	70	85			
	AC380/415 V	45	65	85	100	45	65	85	100	65	85	100			
	AC220/240 V	50	75	100	125	50	75	100	125	75	100	125			
	DC250 V (2P)	20	25	40	40	20	25	40	40	25	40	40			
Service breaking capacity [Ics = % Icu]	100	100	100	100	100	100	100	100	100	100	100	100			
Endurance (Durability)	Mechanical	4,000				2,500				2,500					
	Electrical	1,000				500				500					
Trip Device															
Thermal magnetic	Long time [LT]	Fixed	(1.0) x I _n				(1.0) x I _n				(1.0) x I _n				
		Adjustable	(0.63 - 0.8 - 1.0) x I _n				(0.63 - 0.8 - 1.0) x I _n				(0.63 - 0.8 - 1.0) x I _n				
	Instantaneous [INST]	10 x I _n				10 x I _n				10 x I _n					
Accessory															
Internal	Auxiliary switch	AUX	●				●				●				
	Alarm switch	ALT	●				●				●				
	Shunt trip	SHT	●				●				●				
	Undervoltage trip	UVT	●				●				●				
External	Rotary handle	Front contact	TFG	●				●				●			
		Extended	TFH	●				●				●			
	Motor operator	MOT	●				●				●				
	Mechanical interlock	MIF	●				●				●				
	Locking device	PLD	●				●				●				
	Plug-in	TDM (LINE/LOAD)	● (3P Only)				● (3P Only)				● (3P Only)				
		TDM (LINE only)	● (3P Only)				● (3P Only)				● (3P Only)				
		TDF (LINE only)	-				-				-				
		TDA (1 row)	-				-				-				
		TDA (2 row)	-				-				-				
	Cage terminal block	CTB	●				●				●				
Insulation terminal cover	TCF	●				●				●					
Insulation barrier	TQQ	●				●				●					
Terminal extensions	TBB	●				●				●					
Installation and Dimensions															
Connection/Installation	Front connection	Terminal screw				Terminal screw, Terminal busbar									
	Rear connection	Horizontal/Vertical wiring				Horizontal/Vertical wiring									
	Plug-in	Switchboard type (Line & Load, Line only) ²⁾				Switchboard type (Line & Load, Line only) ²⁾									
Dimensions (mm)		a (2/3/4P)	140/140/184				210/210/280				210/210/280				
		b	257				280				280				
		c	110				110				110				
Weight (kg)	2/3/4P	4/4.5/5.4				8.7/9.5/12.5				8.7/9.5/12.5					
Detailed rating and select	122 Page														
Characteristics curve and outside view	70 - 80 Page														

※ ¹⁾ 4 pole arrangement: Basic specification is R-S-T-N (N-R-S-T is optional).

²⁾ Plug-in: Applicable only 3P.

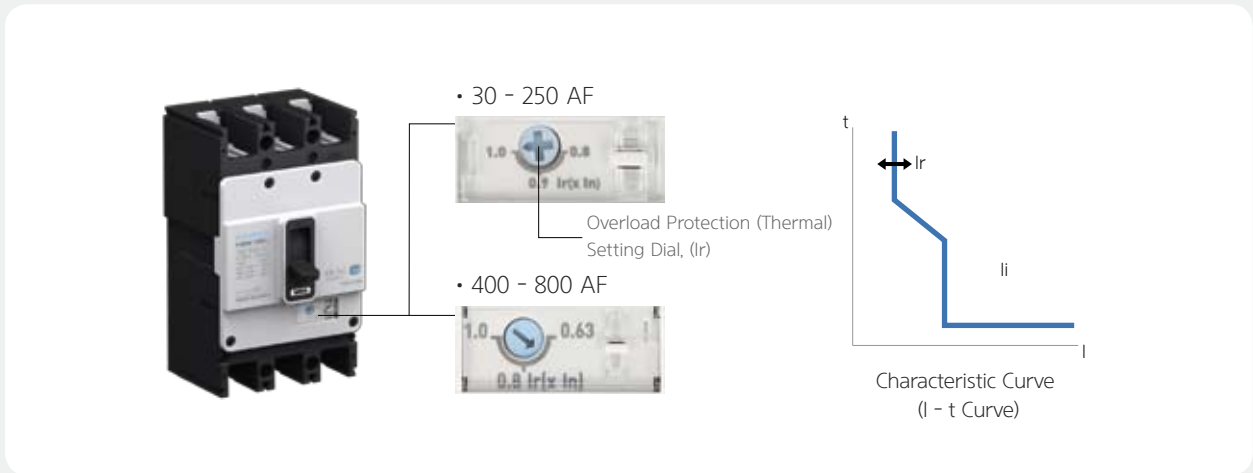

Trip Unit Characteristics - Thermal Magnetic

Rated Current (A) [In]		16	20	25	32	40	50	63	75	80	100	125
MCCB	HGM30	●	●	●	●							
	HGM50	●	●	●	●	●	●					
	HGM60	●	●	●	●	●	●	●				
	HGM100	●	●	●	●	●	●	●	●	●	●	
	HGM125	●	●	●	●	●	●	●	●	●	●	●
Time Pick-Up Characteristics [Ir]												
Settings (A)	Fixed	16	20	25	32	40	50	63	75	80	100	125
	0.8 x In	12.8	16	20	25.6	32	40	50.4	60	64	80	100
	0.9 x In	14.4	18	22.5	28.8	36	45	56.7	67.5	72	90	112.5
	1.0 x In	16	20	25	32	40	50	63	75	80	100	125
Instantaneous Pick-Up Characteristics [Ii]												
Settings (A)	10 x In		400			400	500	630	750	800	1,000	1,250
	Instantaneous pick-up characteristics (A)		320			320	400	504	600	640	800	1,000
	The minimum operating current (A)		480			480	600	756	900	960	1,200	1,500
Neutral Pole Protection												
4P3D	Unprotected											
4P4D	-											

Rated Current (A) [In]		100	125	150	160	175	200	225	250
MCCB	HGM160	●	●	●	●				
	HGM250	●	●	●	●	●	●	●	●
Time Pick-Up Characteristics [Ir]									
Settings (A)	Fixed	100	125	150	160	175	200	225	250
	0.8 x In	80	100	120	128	140	160	180	200
	0.9 x In	90	112.5	135	144	157.5	180	202.5	225
	1.0 x In	100	125	150	160	175	200	225	250
Instantaneous Pick-Up Characteristics [Ii]									
Settings (A)	10 x In	1,000	1,250	1,500	1,600	1,750	2,000	2,250	2,500
	Instantaneous pick-up characteristics (A)	800	1,000	1,200	1,280	1,400	1,600	1,800	2,000
	The minimum operating current (A)	1,200	1,500	1,800	1,920	2,100	2,400	2,700	3,000
Neutral Pole Protection									
4P3D	Unprotected								
4P4D	-								

Rated Current (A) [In]		250	300	350	400	500	630	700	800
MCCB	HGM400	●	●	●	●				
	HGM630					●	●		
	HGM800							●	●
Time Pick-Up Characteristics [Ir]									
Settings (A)	Fixed	250	300	350	400	500	630	700	800
	0.63 x In	158	189	221	252	315	397	441	504
	0.8 x In	200	240	280	320	400	504	560	640
	1.0 x In	250	300	350	400	500	630	700	800
Instantaneous Pick-Up Characteristics [Ii]									
Settings (A)	10 x In	2,500	3,000	3,500	4,000	5,000	6,300	7,000	8,000
	Instantaneous pick-up characteristics (A)	2,000	2,400	2,800	3,200	4,000	5,040	5,600	6,400
	The minimum operating current (A)	3,000	3,600	4,200	4,800	6,000	7,560	8,400	9,600
Neutral Pole Protection									
4P3D	Unprotected								
4P4D	-								

Model Selection Table

ZCT MCCB (HGM□Z Type): 30 - 250 AF

Mounted with a ZCT (Zero phase Current Transformer) at MCCB, the reliability of the MCCB's ground fault protection is improved by linking with an external ELR.

Things in Common

Rated Insulation Voltage, U_i	1,000 V	Suitability for Isolation	Yes
Rated Operational Voltage, U_e	690 V	Utilization Category	A
Impulse Withstand Voltage, U_{imp}	8 kV	Polution Degree	3
Protective Function	Overload, short-circuit and instantaneous protection	Reference Standard	IEC 60947-2

Model		HGM30Z		HGM50Z				HGM60Z			
Frame	(AF)	30		50				63			
Pole	(P)	2 ³⁾ , 3, 4 ¹⁾		2 ³⁾ , 3, 4 ¹⁾				2 ³⁾ , 3, 4 ¹⁾			
Rated current, at 40 °C	(A)	16, 20, 25, 32		16, 20, 25, 32, 40, 50				16, 20, 25, 32, 40, 50, 63			
Rated short-circuit breaking capacity [Icu] (kA rms)	Recognition code for order	E	S	E	S	H	L	E	S	H	L
	AC660/690 V	2.5	5	2.5	5	8	10	2.5	5	7.5	8.0
	AC480/500 V	7.5	10	7.5	10	26	35	7.5	10	14	26
	AC440/460 V	16	20	16	20	38	55	16	20	26	30
	AC380/415 V	16	20	16	20	38	55	16	20	26	30
	AC220/240 V	35	50	35	50	85	100	35	50	50	50
Service breaking capacity [Ics = % Icu]		100	100	100	100	100	100	100	100	75	50
Endurance (Durability)	Mechanical	30,000		30,000				30,000			
	Electrical	10,000		10,000				10,000			

Trip Device					
Thermal magnetic	Long time [LT]	(1.0) x In	(1.0) x In		(1.0) x In
	Instantaneous [INST]	400 A	16 - 32 A: 400 A, 40 - 50 A: 10 x In		16 - 32 A: 400 A, 40 - 63 A: 10 x In

Accessory						
Internal	Auxiliary switch	AUX	●	●	●	
	Alarm switch	ALT	●	●	●	
	Shunt trip	SHT	●	●	●	
	Undervoltage trip	UVT	●	●	●	
External	Rotary handle	Front contact	TFG	●	●	
		Extended	TFH	●	●	
	Motor operator	MOT	●	●	●	
	Mechanical interlock	MIF	●	●	●	
	Locking device	PLD	●	●	●	
	Plug-in	TDM (LINE/LOAD)	● (3P Only)	● (3P Only)	● (3P Only)	● (3P Only)
		TDM (LINE only)	● (3P Only)	● (3P Only)	● (3P Only)	● (3P Only)
		TDF (LINE only)	● (3P Only)	● (3P Only)	● (3P Only)	● (3P Only)
		TDA (1 row)	● (3P Only)	● (3P Only)	● (3P Only)	● (3P Only)
		TDA (2 row)	● (2, 3P Only)	● (2, 3P Only)	● (3P Only)	● (2, 3P Only)
	Cage terminal block	CTB	●	●	●	
	Insulation terminal cover	TCF	●	●	●	
Insulation barrier	TQQ	●	●	●		
Terminal extensions	TBB	-	-	-		

Installation and Dimensions					
Connection/Installation	Front connection	Terminal screw			
	Rear connection	Horizontal/Vertical/Front wiring			
	Plug-in	Switchboard type (Line & Load, Line only), Distribution board type ²⁾			
	DIN rail installation	Possible for using DIN rail adapter	-	Possible for using DIN rail adapter	
Dimensions (mm)	a (2/3/4P)	75/75/100	75/75/100	90/90/120	75/75/100
	b	130	130	155	130
	c	68	68	68	68
Weight (kg)	2/3/4P	0.7/0.8/1.0	0.7/0.8/1.0	0.9/1.0/1.3	0.7/0.8/1.0
Detailed rating and select		122 Page		122 Page	
Characteristics curve and outside view		70 - 80 Page		70 - 80 Page	

※ 1) 4 pole arrangement: Basic specification is R-S-T-N (N-R-S-T is optional).

2) Plug-in: Applicable only 3P.

2) 2P product is just removed versus central pole of 3P product. So, 2P product's dimension is equal to 3P product's dimension.



HGM100Z				HGM125Z				HGM160Z				HGM250Z			
100				125				160				250			
2 ²⁾ , 3, 4 ¹⁾				2 ²⁾ , 3, 4 ¹⁾				2 ²⁾ , 3, 4 ¹⁾				2 ²⁾ , 3, 4 ¹⁾			
16, 20, 25, 32, 40, 50, 63, 75, 80, 100				16, 20, 25, 32, 40, 50, 63, 75, 80, 100, 125				100, 125, 150, 160				100, 125, 150, 160, 175, 200, 225, 250			
E	S	H	L	E	S	H	L	E	S	H	L	E	S	H	L
2.5	5	7.5	8	5	7.5	8	10	7.5	8	8	10	7.5	8	8	10
7.5	10	14	26	10	14	26	35	14	20	26	35	14	20	26	35
16	20	26	30	20	26	38	55	20	26	38	55	20	26	38	55
16	20	26	30	20	26	38	55	20	26	38	55	20	26	38	55
35	50	50	50	50	65	85	100	50	65	85	100	50	65	85	100
100	100	75	50	100	100	100	100	100	100	100	100	100	100	100	100
30,000				30,000				25,000				25,000			
10,000				10,000				10,000				10,000			
(1.0) x In				(1.0) x In				(1.0) x In				(1.0) x In			
16 - 32 A: 400 A, 40 - 100 A: 10 x In				16 - 32 A: 400 A, 40 - 125 A: 10 x In				10 x In				10 x In			
●				●				●				●			
●				●				●				●			
●				●				●				●			
●				●				●				●			
●				●				●				●			
●				●				●				●			
●				●				●				●			
●				●				●				●			
●				●				●				●			
● (3P Only)				● (3P Only)				● (3P Only)				● (3P Only)			
● (3P Only)				● (3P Only)				● (3P Only)				● (3P Only)			
● (3P Only)				● (3P Only)				-				-			
● (3P Only)				● (3P Only)				-				-			
● (2, 3P Only)				● (3P Only)				-				-			
●				●				●				●			
●				●				●				●			
●				●				●				●			
-				-				●				●			
Terminal screw				Terminal screw, Terminal busbar				Terminal screw, Terminal busbar				Terminal screw, Terminal busbar			
Horizontal/Vertical/Front wiring				Horizontal/Vertical/Front wiring				Horizontal/Vertical/Front wiring				Horizontal/Vertical/Front wiring			
Switchboard type (Line & Load, Line only), Distribution board type ²⁾				Switchboard type (Line & Load, Line only) ²⁾				Switchboard type (Line & Load, Line only) ²⁾				Switchboard type (Line & Load, Line only) ²⁾			
Possible for using DIN rail adapter				-				-				-			
75/75/100				90/90/120				105/105/140				105/105/140			
130				155				165				165			
68				68				68				68			
0.7/0.8/1.0				0.9/1.0/1.3				1.1/1.3/1.7				1.1/1.3/1.7			
122 Page				122 Page				122 Page				122 Page			
70 - 80 Page				70 - 80 Page				70 - 80 Page				70 - 80 Page			


Model Selection Table

ZCT MCCB (HGM□Z Type): 400 - 800 AF

Things in Common

Rated Insulation Voltage, U_i	1,000 V
Rated Operational Voltage, U_e	690 V
Impulse Withstand Voltage, U_{imp}	8 kV
Protective Function	Overload, short-circuit and instantaneous protection


Suitability for Isolation	Yes
Utilization Category	A
Pollution Degree	3
Reference Standard	IEC 60947-2

Model		HGM400Z				HGM630Z				HGM800Z				
Frame	(AF)	400				630				800				
Pole	(P)	2 ³⁾ , 3, 4 ¹⁾				2 ³⁾ , 3				2 ³⁾ , 3				
Rated current, at 40 °C	(A)	250, 300, 350, 400				500, 630				700, 800				
Rated short-circuit breaking capacity [Icu] (kA rms)	Recognition code for order	E	S	H	L	E	S	H	L	S	H	L		
	AC660/690 V	5	8.0	10	14	5	8	10	14	8	10	14		
	AC480/500 V	18	35	50	65	25	45	50	65	45	50	65		
	AC440/460 V	38	50	70	85	38	50	70	85	50	70	85		
	AC380/415 V	45	65	85	100	45	65	85	100	65	85	100		
	AC220/240 V	50	75	100	125	50	75	100	125	75	100	125		
Service breaking capacity [Ics = % Icu]		100	100	100	100	100	100	100	100	100	100	100		
Endurance (Durability)	Mechanical	4,000				2,500				2,500				
	Electrical	1,000				500				500				
Trip Device														
Thermal magnetic	Long time [LT]	(1.0) x I _n				(1.0) x I _n				(1.0) x I _n				
	Instantaneous [INST]	10 x I _n				10 x I _n				10 x I _n				
Accessory														
Internal	Auxiliary switch	AUX	●				●				●			
	Alarm switch	ALT	●				●				●			
	Shunt trip	SHT	●				●				●			
	Undervoltage trip	UVT	●				●				●			
External	Rotary handle	Front contact	TFG	●				●				●		
		Extended	TFH	●				●				●		
	Motor operator	MOT	●				●				●			
	Mechanical interlock	MIF	●				●				●			
	Locking device	PLD	●				●				●			
	Plug-in	TDM (LINE/LOAD)	● (3P Only)				● (3P Only)				● (3P Only)			
		TDM (LINE only)	● (3P Only)				● (3P Only)				● (3P Only)			
		TDF (LINE only)	-				-				-			
		TDA (1 row)	-				-				-			
		TDA (2 row)	-				-				-			
	Cage terminal block	CTB	●				●				●			
	Insulation terminal cover	TCF	●				●				●			
Insulation barrier	TQQ	●				●				●				
Terminal extensions	TBB	●				●				●				
Installation and Dimensions														
Connection/Installation	Front connection	Terminal screw				Terminal screw, Terminal busbar								
	Rear connection	Horizontal/Vertical wiring				Horizontal/Vertical wiring								
	Plug-in	Switchboard type (Line & Load, Line only) ²⁾				Switchboard type (Line & Load, Line only) ²⁾								
Dimensions (mm)		a (2/3/4P)	140/140/184				210/210				210/210			
		b	257				280				280			
		c	110				110				110			
Weight (kg)	2/3/4P	4/4.5/5.4				8.7/9.5				8.7/9.5				
Detailed rating and select		122 Page				122 Page				122 Page				
Characteristics curve and outside view		70 - 80 Page				70 - 80 Page				70 - 80 Page				

※ 1) 4 pole arrangement: Basic specification is R-S-T-N (N-R-S-T is optional).

2) Plug-in: Applicable only 3P.

3) 2P product is just removed versus central pole of 3P product. So, 2P product's dimension is equal to 3P product's dimension.

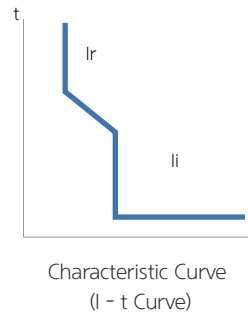

Trip Unit Characteristics - Thermal Magnetic

Rated Current (A) [In]		16	20	25	32	40	50	63	75	80	100	125				
MCCB	HGM30Z	●	●	●	●											
	HGM50Z	●	●	●	●	●	●									
	HGM60Z	●	●	●	●	●	●	●								
	HGM100Z	●	●	●	●	●	●	●	●	●	●					
	HGM125Z	●	●	●	●	●	●	●	●	●	●	●				
Time Pick-Up Characteristics [I _r]																
Settings (A)	1.0 x I _n	16	20	25	32	40	50	63	75	80	100	125				
Instantaneous Pick-Up Characteristics [I _i]																
Settings (A)	10 x I _n	400		400		400	500	630	750	800	1,000	1,250				
	Instantaneous pick-up characteristics (A)	320		320		320	400	504	600	640	800	1,000				
	The minimum operating current (A)	480		480		480	600	756	900	960	1,200	1,500				
Neutral Pole Protection																
4P3D		Unprotected														
4P4D		-														
Rated Current (A) [In]		100	125	150	160	175	200	225	250	300	350	400	500	630	700	800
MCCB	HGM160Z	●	●	●	●											
	HGM250Z	●	●	●	●	●	●	●	●							
	HGM400Z								●	●	●	●				
	HGM630Z												●	●		
	HGM800Z														●	●
Time Pick-Up Characteristics [I _r]																
Settings (A)	1.0 x I _n	100	125	150	160	175	200	225	250	300	350	400	500	630	700	800
Instantaneous Pick-Up Characteristics [I _i]																
Settings (A)	10 x I _n	1,000	1,250	1,500	1,600	1,750	2,000	2,250	2,500	3,000	3,500	4,000	5,000	6,300	7,000	8,000
	Instantaneous pick-up characteristics (A)	800	1,000	1,200	1,280	1,400	1,600	1,800	2,000	2,400	2,800	3,200	4,000	5,040	5,600	6,400
	The minimum operating current (A)	1,200	1,500	1,800	1,920	2,100	2,400	2,700	3,000	3,600	4,200	4,800	6,000	7,560	8,400	9,600
Neutral Pole Protection																
4P3D		Unprotected														
4P4D		-														

Model Selection Table

ELCB (HGE Type): 30 - 250 AF

Things in Common

Rated Operational Voltage, Ue	220/460 V	Suitability for Isolation	Yes
Impulse Withstand Voltage, Uimp	6 kV	Utilization Category	A
Protective Function	Overload, short-circuit and instantaneous protection	Polution Degree	3
		Reference Standard	IEC 60947-2

Model		HGE30	HGE50	HGE60	
Frame	(AF)	30	50	63	
Pole	(P)	2 ³⁾ , 3, 4 ¹⁾	2 ³⁾ , 3, 4 ¹⁾	2 ³⁾ , 3, 4 ¹⁾	
Rated current, at 40 °C	(A)	16, 20, 25, 32	16, 20, 25, 32, 40, 50	16, 20, 25, 32, 40, 50, 63	
High speed type	Rated residual current (mA)	30	30	30	
	Maximum residual current off-time (s)	0.1	0.1	0.1	
Time delay type	Rated residual current (mA)	100 - 300 - 500 - 1,000 Adjustable	100 - 300 - 500 - 1,000 Adjustable	100 - 300 - 500 - 1,000 Adjustable	
	Maximum residual current off-time (s)	0.1 - 0.4 - 1.0 - 2.0	0.1 - 0.4 - 1.0 - 2.0	0.1 - 0.4 - 1.0 - 2.0	
	Inertial non-operating time (ms)	0 - 200 - 500 - 1,000 Adjustable	0 - 200 - 500 - 1,000 Adjustable	0 - 200 - 500 - 1,000 Adjustable	
Rated short-circuit breaking capacity [Icu] (kA rms)	Recognition code for order	E S	E S H L	E S H L	
	AC440/460 V	16 20	16 20 38 55	16 20 26 30	
	AC380/415 V	16 20	16 20 38 55	16 20 26 30	
	AC220/240 V	35 50	35 50 85 100	35 50 50 50	
Service breaking capacity [Ics = % Icu]	100	100	100 100 100 100	100 100 75 50	
Endurance (Durability)	Inverse time delay [LT]	30,000	30,000	30,000	
	Short time pick-up [LT]	10,000	10,000	10,000	
Trip Device					
Thermal magnetic	Long time [LT]	(1.0) x In	(1.0) x In	(1.0) x In	
	Instantaneous [INST]	400 A	16 - 32 A: 400 A, 40, 50 A: 10 x In	16 - 32 A: 400 A, 40 - 63 A: 10 x In	
Accessory					
Internal	Auxiliary switch AUX	●	●	●	
	Alarm switch ALT	●	●	●	
	Shunt trip SHT	-	-	-	
	Undervoltage trip UVT	-	-	-	
External	Rotary handle	Front contact TFG	●	●	●
		Extended TFH	●	●	●
	Motor operator MOT	●	●	●	
	Mechanical interlock MIF	●	●	●	
	Locking device PLD	●	●	●	
	Plug-in	TDM (LINE/LOAD)	● (3P Only)	● (3P Only) ● (3P Only)	● (3P Only)
		TDM (LINE only)	● (3P Only)	● (3P Only) ● (3P Only)	● (3P Only)
		TDF (LINE only)	● (3P Only)	● (3P Only) ● (3P Only)	● (3P Only)
		TDA (1 row)	● (3P Only)	● (3P Only) ● (3P Only)	● (3P Only)
		TDA (2 row)	● (2, 3P Only)	● (2, 3P Only) ● (3P Only)	● (2, 3P Only)
	Cage terminal block CTB	●	●	●	
	Insulation terminal cover TCF	●	●	●	
	Insulation barrier TQQ	●	●	●	
Terminal extensions TBB	-	-	-		

Installation And Dimensions

Connection/Installation	Front connection	Terminal screw			
	Rear connection	Horizontal/Vertical/Front wiring			
Plug-in	Switchboard type (Line & Load, Line only), Distribution board type ²⁾				
	DIN rail Installation	Possible for using DIN rail adapter	-	Possible for using DIN rail adapter	
Dimensions (mm)	a (2/3/4P)	75/75/100	75/75/100	90/90/120	75/75/100
	b	130	130	155	130
	c	68	68	68	68
Weight (kg)	2/3/4P	0.8/0.9/1.3	0.8/0.9/1.3	1.0/1.1/1.4	0.8/0.9/1.3
Detailed rating and select		122 Page	122 Page		122 Page
Characteristics curve and outside view		70 - 85 Page	70 - 85 Page		70 - 85 Page

※ 1) 4 pole arrangement: Basic specification is R-S-T-N (N-R-S-T is optional).

2) Plug-in: Applicable only 3P.

3) 2P product is just removed versus central pole of 3P product. So, 2P product's dimension is equal to 3P product's dimension.



HGE100				HGE125				HGE160				HGE250			
100				125				160				250			
2 ²⁾ , 3, 4 ¹⁾				2 ²⁾ , 3, 4 ¹⁾				2 ²⁾ , 3, 4 ¹⁾				2 ²⁾ , 3, 4 ¹⁾			
16, 20, 25, 32, 40, 50, 63, 75, 80, 100				16, 20, 25, 32, 40, 50, 63, 75, 80, 100, 125				100, 125, 150, 160				100, 125, 150, 160, 175, 200, 225, 250			
30				30				30				30			
0.1				0.1				0.1				0.1			
100 - 300 - 500 - 1,000 Adjustable				100 - 300 - 500 - 1,000 Adjustable				100 - 300 - 500 - 1,000 Adjustable				100 - 300 - 500 - 1,000 Adjustable			
0.1 - 0.4 - 1.0 - 2.0				0.1 - 0.4 - 1.0 - 2.0				0.1 - 0.4 - 1.0 - 2.0				0.1 - 0.4 - 1.0 - 2.0			
0 - 200 - 500 - 1,000 Adjustable				0 - 200 - 500 - 1,000 Adjustable				0 - 200 - 500 - 1,000 Adjustable				0 - 200 - 500 - 1,000 Adjustable			
E	S	H	L	E	S	H	L	E	S	H	L	E	S	H	L
16	20	26	30	20	26	38	55	20	26	38	55	20	26	38	55
20	26	26	30	20	26	38	55	20	26	38	55	20	26	38	55
30	50	50	50	50	65	85	100	50	65	85	100	50	65	85	100
100	100	75	50	100	100	100	100	100	100	100	100	100	100	100	100
30,000				30,000				25,000				25,000			
10,000				10,000				10,000				10,000			
(1.0) x In				(1.0) x In				(1.0) x In				(1.0) x In			
16 - 32 A: 400 A, 40 - 100 A: 10 x In				16 - 32 A: 400 A, 40 - 125 A: 10 x In				10 x In				10 x In			
●				●				●				●			
●				●				●				●			
-				-				-				-			
●				●				●				●			
●				●				●				●			
●				●				●				●			
●				●				●				●			
●				●				●				●			
● (3P Only)				● (3P Only)				● (3P Only)				● (3P Only)			
● (3P Only)				● (3P Only)				● (3P Only)				● (3P Only)			
● (3P Only)				● (3P Only)				-				-			
● (3P Only)				● (3P Only)				-				-			
● (2, 3P Only)				● (3P Only)				-				-			
●				●				●				●			
●				●				●				●			
●				●				●				●			
-				-				●				●			
Terminal screw								Terminal screw							
Horizontal/Vertical/Front wiring								Horizontal/Vertical/Front wiring							
Switchboard type (Line & Load, Line only), Distribution board type ²⁾								Switchboard type (Line & Load, Line only) ²⁾							
Possible for using DIN rail adapter								-							
75/75/100				90/90/120				105/105/185				105/105/140			
130				155				165				165			
68				68				68				68			
0.8/0.9/1.3				1.0/1.1/1.4				1.3/1.5/1.9				1.3/1.5/1.9			
122 Page				122 Page				122 Page				122 Page			
70 - 85 Page				70 - 85 Page				70 - 85 Page				70 - 85 Page			

Model Selection Table

ELCB (HGE Type): 400 - 800 AF

Things in Common




Rated Operational Voltage, Ue	220/460 V	Suitability for Isolation	Yes
Impulse Withstand Voltage, Uimp	6 kV	Utilization Category	A
Protective Function	Overload, short-circuit and instantaneous protection	Polution Degree	3
		Reference Standard	IEC 60947-2

Model		HGE400				HGE630				HGE800				
Frame	(AF)	400				630				800				
Pole	(P)	2 ³⁾ , 3, 4 ¹⁾				2 ³⁾ , 3				2 ³⁾ , 3				
Rated current, at 40 °C	(A)	250, 300, 350, 400				500, 630				700, 800				
High speed type	Rated residual current (mA)	30				30				30				
	Maximum residual current off-time (s)	0.1				0.1				0.1				
Time delay type	Rated residual current (mA)	100 - 300 - 500 - 1,000 Adjustable				100 - 300 - 500 - 1,000 Adjustable				100 - 300 - 500 - 1,000 Adjustable				
	Maximum residual current off-time (s)	0.1 - 0.4 - 1.0 - 2.0				0.1 - 0.4 - 1.0 - 2.0				0.1 - 0.4 - 1.0 - 2.0				
	Inertial non-operating time (ms)	0 - 200 - 500 - 1,000 Adjustable				0 - 200 - 500 - 1,000 Adjustable				0 - 200 - 500 - 1,000 Adjustable				
Rated short-circuit breaking capacity [Icu] (kA rms)	Recognition code for order	E	S	H	L	E	S	H	L	S	H	L		
	AC440/460 V	38	50	70	85	38	50	70	85	50	70	85		
	AC380/415 V	45	65	85	100	45	65	85	100	65	85	100		
	AC220/240 V	50	75	100	125	50	75	100	125	75	100	125		
Service breaking capacity [Ics = % Icu]		100	100	100	100	100	100	100	100	100	100	100		
Endurance (Durability)	Inverse time delay [LT]	4,000				2,500				2,500				
	Short time pick-up [LT]	1,000				500				500				
Trip Device														
Thermal magnetic	Long time [LT]	(1.0) x In				(1.0) x In				(1.0) x In				
	Instantaneous [INST]	10 x In				10 x In				10 x In				
Accessory														
Internal	Auxiliary switch	AUX	●				●				●			
	Alarm switch	ALT	●				●				●			
	Shunt trip	SHT	●				●				●			
	Undervoltage trip	UVT	●				●				●			
External	Rotary handle	Front contact	TFG	●				●				●		
		Extended	TFH	●				●				●		
	Motor operator	MOT	●				●				●			
	Mechanical interlock	MIF	●				●				●			
	Locking device	PLD	●				●				●			
	Plug-in	TDM (LINE/LOAD)	● (3P Only)				● (3P Only)				● (3P Only)			
		TDM (LINE only)	● (3P Only)				● (3P Only)				● (3P Only)			
		TDF (LINE only)	-				-				-			
		TDA (1 row)	-				-				-			
		TDA (2 row)	-				-				-			
	Cage terminal block	CTB	●				●				●			
	Insulation terminal cover	TCF	●				●				●			
Insulation barrier	TQQ	●				●				●				
Terminal extensions	TBB	●				●				●				
Installation and Dimensions														
Connection/Installation	Front connection	Terminal screw				Terminal screw, Terminal busbar								
	Rear connection	Horizontal/Vertical/Front wiring				Horizontal/Vertical/Front wiring								
	Plug-in	Switchboard type (Line & Load, Line only) ²⁾				Switchboard Type (Line & Load, Line only) ²⁾								
Dimensions (mm)	a (2/3/4P)	140/140/184				210/210				210/210				
	b	257				280				280				
	c	110				110				110				
	Weight (kg)	3/4P	4/4.5/5.4				8.7/9.5				8.7/9.5			
Detailed rating and select		122 Page				122 Page				122 Page				
Characteristics curve and outside view		70 - 85 Page				70 - 85 Page				70 - 85 Page				

※ ¹⁾ 4 pole arrangement: Basic specification is R-S-T-N (N-R-S-T is optional).

²⁾ Plug-in: Applicable only 3P.

³⁾ 2P product is just removed versus central pole of 3P product. So, 2P product's dimension is equal to 3P product's dimension.

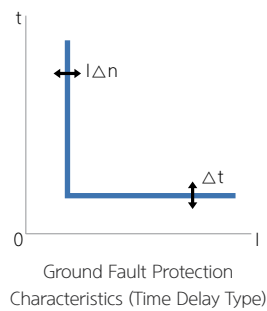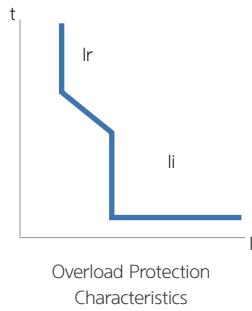

Trip Unit Characteristics - Thermal Magnetic

Rated Current (A) [I _n]		16	20	25	32	40	50	63	75	80	100	125
ELCB	HGE30	●	●	●	●							
	HGE50	●	●	●	●	●	●					
	HGE60	●	●	●	●	●	●	●				
	HGE100	●	●	●	●	●	●	●	●	●	●	
	HGE125	●	●	●	●	●	●	●	●	●	●	●

Time Pick-Up Characteristics [I_r]

Settings (A)	1.0 x I _n	16	20	25	32	40	50	63	75	80	100	125
--------------	----------------------	----	----	----	----	----	----	----	----	----	-----	-----

Instantaneous Pick-Up Characteristics [I_i]

Settings (A)	10 x I _n	400		400	400	500	630	750	800	1,000	1,250
	I _{Max.} non-operating current (A)	320		320	320	400	504	600	640	800	1,000
	Min. operating current (A)	480		480	480	600	756	900	960	1,200	1,500

Rated Residual Current, I_{Δn}

High speed type	Fixed: 30 mA
Time delay type	Adjustable: 100 - 300 - 500 - 1,000 mA

Inertial Non-Operating, Δt

High speed type	Fixed: 0 ms
Time delay type	Adjustable: 0 - 200 - 500 - 1,000 ms

Neutral Pole Protection

4P3D	Unprotected
4P4D	-

Rated Current (A) [I _n]		100	125	150	160	175	200	225	250	300	350	400	500	630	700	800
ELCB	HGE160	●	●	●	●											
	HGE250	●	●	●	●	●	●	●								
	HGE400								●	●	●	●				
	HGE630												●	●		
	HGE800														●	●

Time Pick-Up Characteristics [I_r]

Settings (A)	1.0 x I _n	100	125	150	160	175	200	225	250	300	350	400	500	630	700	800
--------------	----------------------	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----

Instantaneous Pick-Up Characteristics [I_i]

Settings (A)	10 x I _n	1,000	1,250	1,500	1,600	1,750	2,000	2,250	2,500	3,000	3,500	4,000	5,000	6,300	7,000	8,000
	I _{Max.} non-operating current (A)	800	1,000	1,200	1,280	1,400	1,600	1,800	2,000	2,400	2,800	3,200	4,000	5,040	5,600	6,400
	Min. operating current (A)	1,200	1,500	1,800	1,920	2,100	2,400	2,700	3,000	3,600	4,200	4,800	6,000	7,560	8,400	9,600

Rated Residual Current, I_{Δn}

High speed type	Fixed: 30 mA
Time delay type	Adjustable: 100 - 300 - 500 - 1,000 mA

Inertial Non-Operating, Δt

High speed type	Fixed: 0 ms
Time delay type	Adjustable: 0 - 200 - 500 - 1,000 ms

Neutral Pole Protection

4P3D	Unprotected
4P4D	-

Accessories

Accessories 34


Internal Accessories

Accessory Type and Install Position	36
Auxiliary Switch (AUX) / Alarm Switch (ALT)	38
Shunt Trip (SHT)	39
Undervoltage Trip (UVT)	40


External Accessories

Locking Device	41
Terminal Cover	42
Insulation Barrier	43
Rotary Handle	44
Front Connection of Fixed Devices	46
Plug-in Connection Devices	48
Rear Connection Terminal	50
DIN Rail Adaptor	50
Motor Operator	51

Accessories

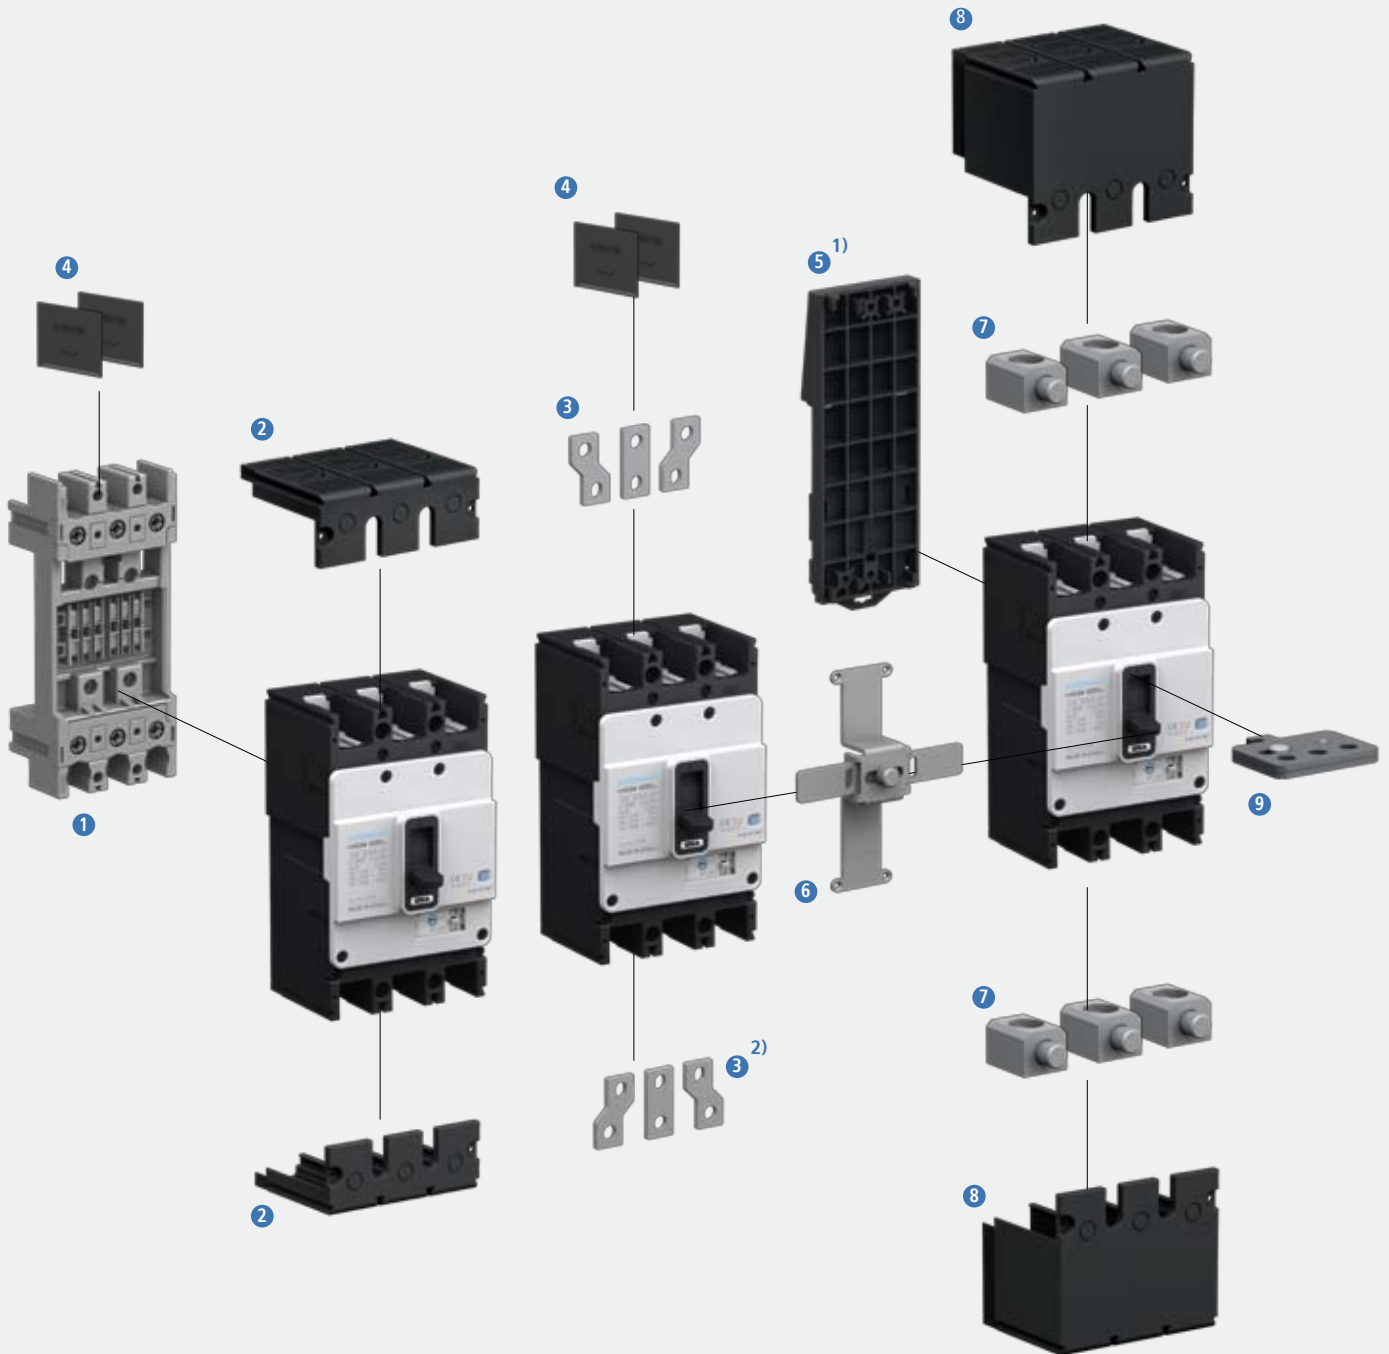



※ 1) DIN rail adaptor (DRA): HGM/HGE100 only
2) Busbar (TBB): HGM/HGE250 only

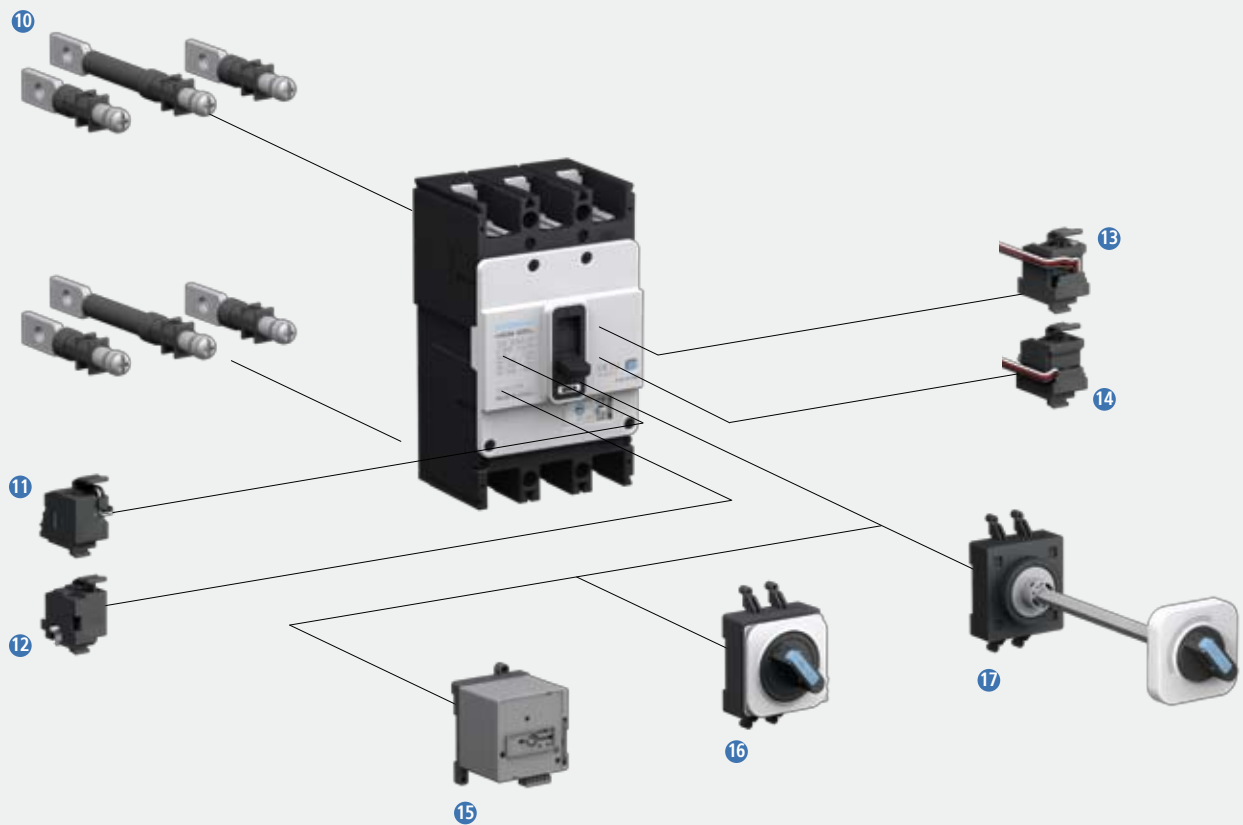

HGM Type Molded Case Circuit Breakers

- | | | |
|-----------------------------------|-----------------------------|---------------------------|
| 1 Plug in Devices | 7 Lug Terminal | 13 Auxiliary Switch |
| 2 Terminal Cover for Plug-In Type | 8 Terminal Cover | 14 Trip Alarm Switch |
| 3 Busbar | 9 Padlock for Rotary Handle | 15 Motor Operator |
| 4 Insulation Barrier | 10 Rear Connection Terminal | 16 Direct Rotary Handle |
| 5 DIN Rail Adaptor | 11 Shunt Trip Coil | 17 Extended Rotary Handle |
| 6 Mechanical Interlock | 12 Undervoltage Trip Coil | |

Internal Accessories

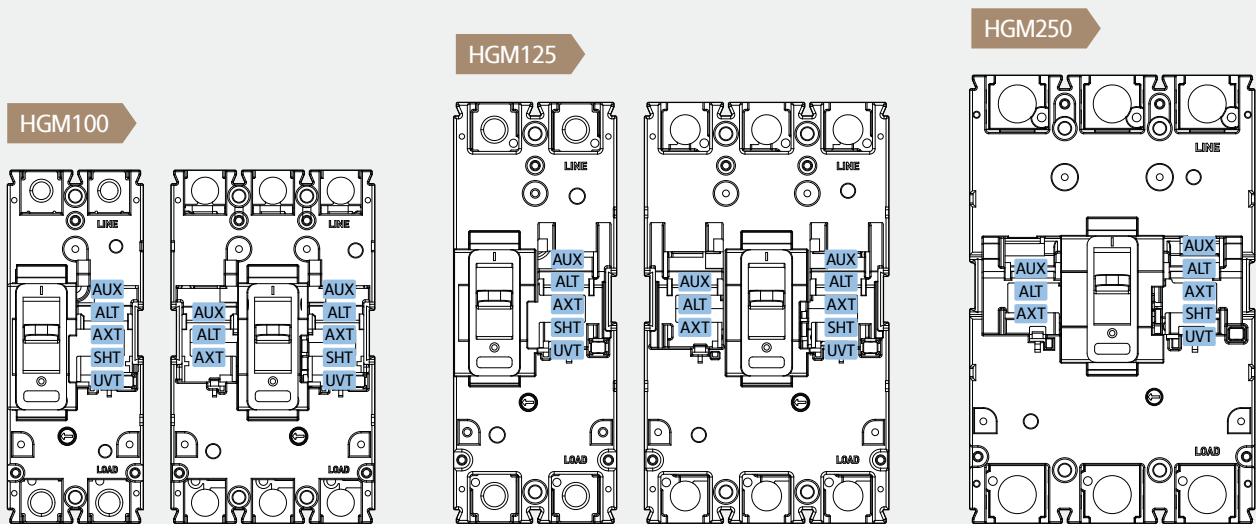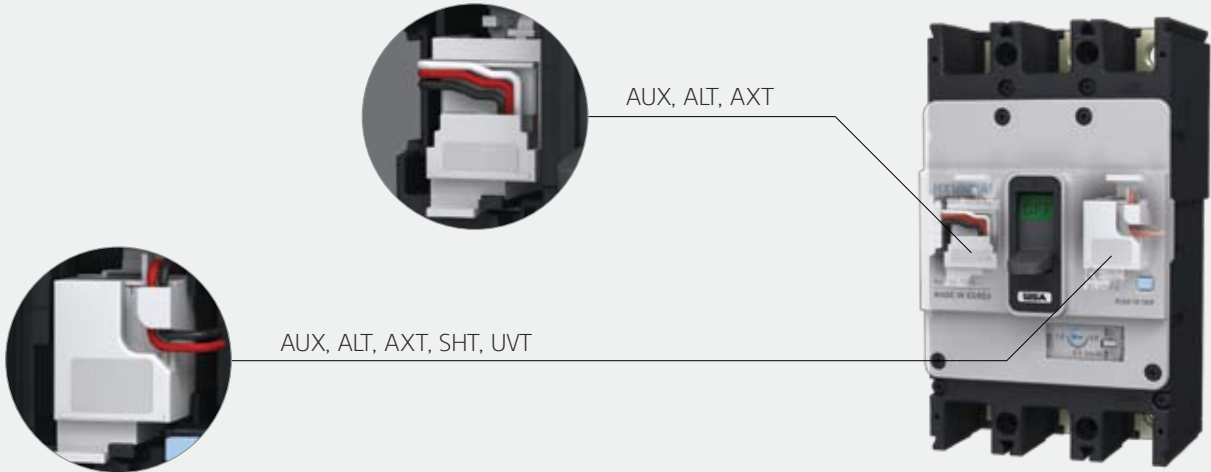



Combinations of Internal Accessories (250 AF or less)

Type	Pole	AUX	ALT	SHT	UVT	AXT	AUX	AUX	SHT	UVT	SHT	UVT	SHT	UVT
							ALT	ALT	AUX	AUX	ALT	ALT	AXT	AXT
HGM100 HGM125	2													
HGM100 HGM125 HGM250	3/4													
HGE100 HGE125 HGE250	2/3/4													

※ AUX: Auxiliary switch □ / ALT: Alarm switch ■ / SHT: Shunt trip ☒ / UVT: Under-voltage trip ☒ / AXT: Auxiliary alarm switch □■

Category and Installation of Internal Accessories

- Auxiliary switch (AUX)
- Alarm switch (ALT)
- Auxiliary + Alarm switch (AXT)
- Shunt trip (SHT)
- Undervoltage trip (UVT)

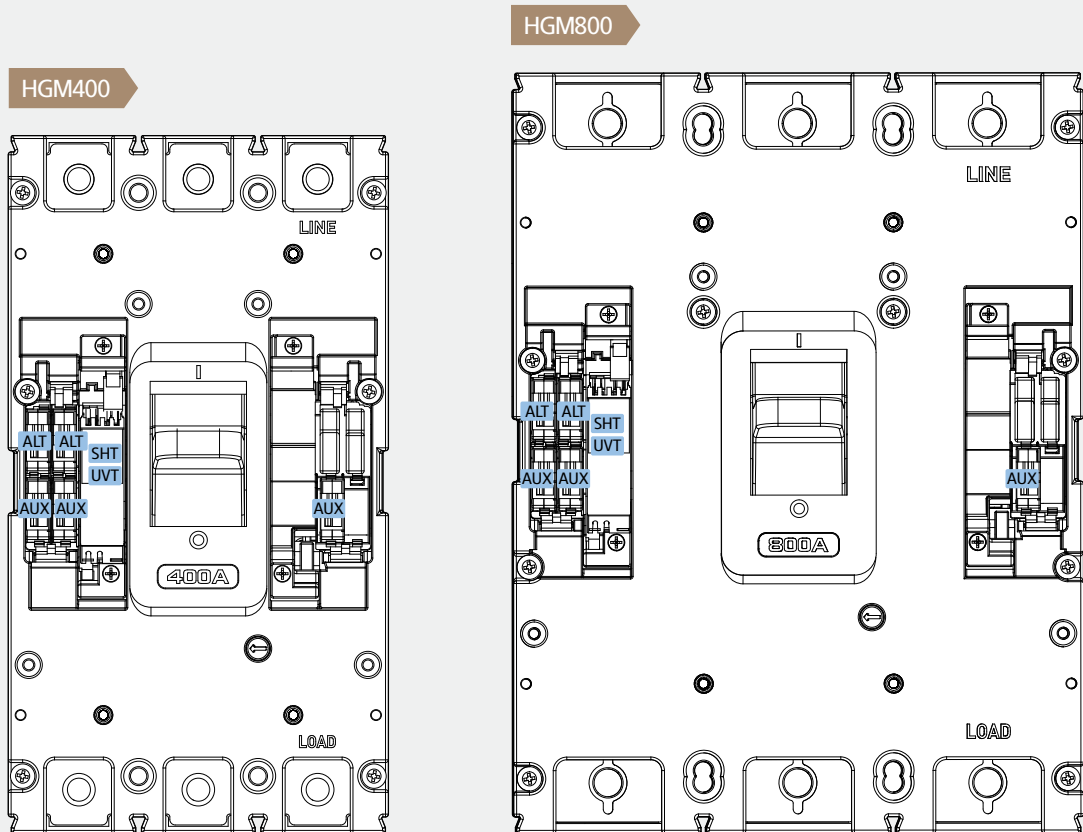

Combinations of Internal Accessories (400 - 800 AF)

Type	Pole	AUX	ALT	SHT	UVT	AUX	SHT	UVT	SHT	UVT	SHT	UVT
						ALT	AUX	AUX	ALT	ALT	AUX	AUX
HGM400	2/3/4											
HGM800	2/3/4											
HGE400	2/3/4											
HGE800	2/3											

※ AUX: Auxiliary switch □ / ALT: Alarm switch ■ / SHT: Shunt trip ▨ / UVT: Under-voltage trip ☒

Internal Accessories

Auxiliary Switch (AUX), Alarm Switch (ALT)

Indicates the status of circuit breaker contacts from a remote position as well as using for electric locking.

Auxiliary Switch (AUX)

- Indicating ON/OFF status of circuit breaker.
- Status is OFF when TRIP.
- Consists of C contact.



AUX

Alarm Switch (ALT)

- Activated when the circuit breaker has tripped due to an overload, short circuit or ground fault excepting manual ON/OFF operation.
- Return to original state, when circuit breaker reset.
- Consist of C contact.



Auxiliary + Alarm Switch (AXT)

- Combined AUX and ALT auxiliary switch.

Contact Circuit Diagram

	Auxiliary Switch (AUX)	Alarm Switch (ALT)
MCCB ON		
MCCB OFF		
MCCB TRIP		

Possible Location for Installation

Type	극수	AUX	ALT	AXT
HGM100 HGM125	2			
HGM100 HGM125 HGM250	3/4			
HGE100 HGE125 HGE250	2/3/4			
HGM400	2/3/4			
HGE400	2/3/4			
HGM800	2/3/4			
HGE800	2/3			

Rating of Contact

Rated Conventional Thermal Current	5 A	
Minimum Load	160 mA, 5 VDC	
Rated Operational Current	Resistive load	Inductive load
	AC125 V	5 A
AC250 V	3 A	2 A
DC30 V	4 A	3 A
DC125 V	0.4 A	0.4 A
DC250 V	0.2 A	0.2 A

※ AUX: Auxiliary switch
 ALT: Alarm switch
 AXT: Auxiliary alarm switch



Shunt Trip (SHT)

Remotely trip circuit breakers by voltage shunt trip (SHT) device.

Operation Condition

- $U \geq 0.7 \times U_n$ (Apply more than 70 % of the rated voltage.)
- In case of impulse type voltage, apply more than 20 ms



Rated Voltage and Characteristics (100 - 250 AF)

Rated Voltage (Un)		Power consumption	
		VA (W)	A (A)
DC	24 V	50.2	2.1
	48 V	94.6	1.97
	60 V	91.2	1.52
	100 - 120 V	11.8	0.1
	125 V	58.1	0.47
AC (50/60 Hz)	100 - 120 V	75.2	0.63
	200 - 250 V	64.8	0.26
	380 - 480 V	131	0.27
Rated Operational Voltage		0.7 - 1.1 x Un	
Operating Time		50 ms	



Possible Location for Installation

Type	Pole	SHT	UVT
HGM100 HGM125	2		
HGM100 HGM125 HGM250	3/4		
HGE100 HGE125 HGE250	2/3/4		
HGM400	2/3/4		
HGE400	2/3/4		
HGM800	2/3/4		
HGE800	2/3		

- ※ SHT: Shunt trip
 UVT: Under-voltage trip

Internal Accessories

Undervoltage Trip (UVT)

In case circuit voltage is less than the reference value, the circuit breaker will not trip or close (ON). If circuit voltage falls less than 35% of Rated voltage (U_n), UVT initiates a trip automatically to prevent damage to the load.

Opening Conditions

- Operating characteristics is guaranteed based on IEC60947-2 standard criteria.
- Trip condition: $U \leq 0.35 \times U_n$
- Fixed: 50 ms
- Time Delay: 500 ms
- No Trip condition: $U \geq 0.7 \times U_n$
- In $U = 0.35 - 0.7 \times U_n$ interval, circuit breaker can be tripped but, does not warrant the operation.

Closing Conditions

- Circuit breakers installed with UVT can be SET OFF/RESET under voltage drop and blackout. However, SET ON (Closing) is not available if no voltage is recovered.
- Voltage must be applied at UVT for closing (ON).
- Closing condition: $U \geq 0.85 \times U_n$

Time Delay Function

To prevent a malfunction in the short time voltage drop of less than 500 ms.

Rated Voltage and Characteristic (100 - 250 AF)

Rated Voltage (U_n)		Power consumption	
		VA (W)	A (mA)
DC	24 V	0.96	40
	48 V	1.1	22.7
	100 - 110 V	2.2	20
AC (50/60 Hz)	100 - 120 V	5.1	42
	200 - 230 V	6	26
	380 - 415 V	9.6	23
	440 - 480 V	12.5	26
Operating Inception Voltage	In the Case of Trip	0.35 - 0.7 x U_n	
	In the Case of Closing	0.85 x U_n	
Rated Operational Voltage		0.85 - 1.1 x U_n	
Operating Time		50 ms	



UVT



UVT Controller

External Accessories


Locking Device

Padlock Device for Handle (PLD)

This device is used for locking the handle of circuit breakers to OFF position by using padlock. Key lock is applicable up to 3 EA and not be supplied additionally. Ratings of keylock are as below.



Type	Application	Padlock Diameter
PLD 10GM	HGM100 - HGM250	5 mm
	HGE100 - HGE250	
PLD 40GM	HGM400 - HGM800	6 mm
	HGE400 - HGE800	

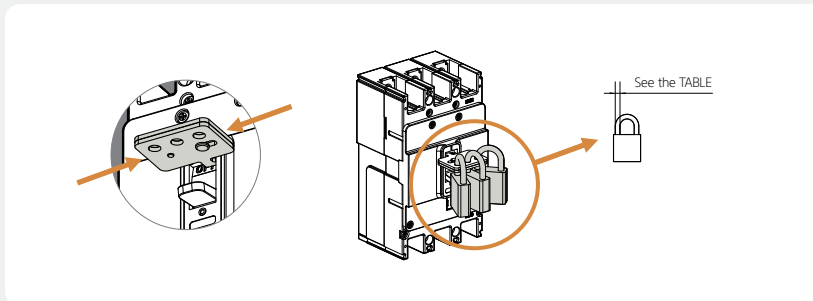

Mechanical Interlock

This device interlocks two circuit breakers mechanically.



Features

- It prevents two breakers from closing at the same time two.
- It turns two breakers all OFF.


Ratings of keylock are as below.




Type				Application	Padlock Diameter
2P	3P	4P (RSTN)	4P (NRST)		
MIF 10GM 2	MIF 10GM 3	MIF 10GM R4	MIF 10GM N4	HGM100/HGE100	5 mm
MIF 12GM 2	MIF 12GM 3	MIF 12GM R4	MIF 12GM N4	HGM125/HGE125	
-	MIF 25GM 3	MIF 25GM R4	MIF 25GM N4	HGM250/HGE250	8 mm
-	MIF 40GM 3	MIF 40GM R4	MIF 40GM N4	HGM400/HGE400	
-	MIF 80GM 3	MIF 80GM R4	MIF 80GM N4	HGM800/HGE800	

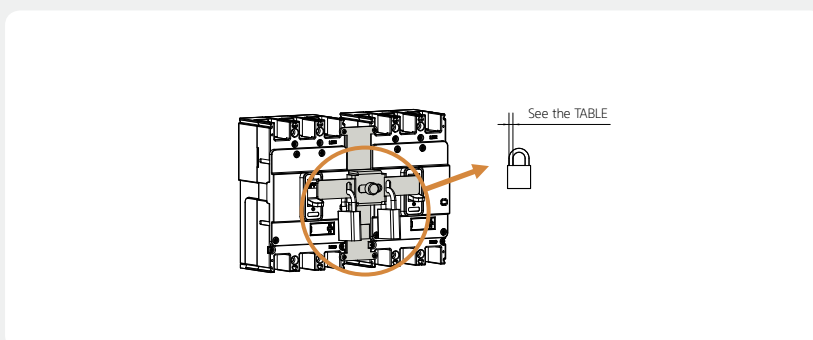

Right Off Lock



Left Off Lock



Double Off Lock

External Accessories

Terminal Cover

Terminal cover is the device to insulate circuit breaker terminal from the outside for safety. It is possible to apply IP40 as protection degree of power parts. Based on the connecting methods of the circuit breakers long or short type terminals can be applied.

Short Type

Suitable for plug-in or rear connection.




Long Type


Suitable for front connection using wires, busbar, or lug terminals.




Type						Application	Pitch (mm)
2P		3P		4P			
Short	Long	Short	Long	Short	Long		
TCF 10GM S2	TCF 10GM L2	TCF 10GM S3	TCF 10GM L3	TCF 10GM S4	TCF 10GM L4	HGM100 HGE100	25
TCF 12GM S2	TCF 12GM L2	TCF 12GM S3	TCF 12GM L3	TCF 12GM S4	TCF 12GM L4	HGM125 HGE125	30
TCF 25GM S3	TCF 25GM L3	TCF 25GM S3	TCF 25GM L3	TCF 25GM S4	TCF 25GM L4	HGM250 HGE250	35
TCF 40GM S3	TCF 40GM L3	TCF 40GM S3	TCF 40GM L3	TCF 40GM S4	TCF 40GM L4	HGM400 HGE400	44
TCF 80GM S3	TCF 80GM L3	TCF 80GM S3	TCF 80GM L3	TCF 80GM S4	TCF 80GM L4	HGM800 HGE800	70



Assembling



Short Type
(Plug-In Connection)

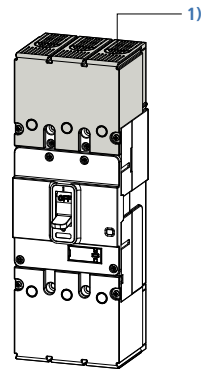

Long Type
(Front Connection)


※ 1) Front Connection으로 사용할 경우 표시부를 제거한 후 사용하십시오.

Insulation Barrier

Insulation barrier is used for preventing short-circuit fault due to dielectric breakdown between circuit breaker terminals. It improves the performance of terminal phase-to-phase insulation if installed at groove between the terminal of two circuit breakers. It can be easily assembled after the installation of the circuit breaker. In addition, it is used in terminal cover and plug-in base.



Type			Application	Number of Parts (EA/Set)		
2P	3P	4P		2P	3P	4P
TQQ 10GM 2	TQQ 10GM 3	TQQ 10GM 4	HGM100 HGE100	1	2	3
TQQ 10GM 2	TQQ 10GM 3	TQQ 10GM 4	HGM125 HGE125	1	2	3
TQQ 25GM 2	TQQ 25GM 3	TQQ 25GM 4	HGM250 HGE250	1	2	3
TQQ 63GP 2	TQQ 63GP 3	TQQ 63GP 4	HGM400 HGE400	1	2	3
TQQ 63GP 2	TQQ 63GP 3	TQQ 63GP 4	HGM800 HGE800	1	2	3

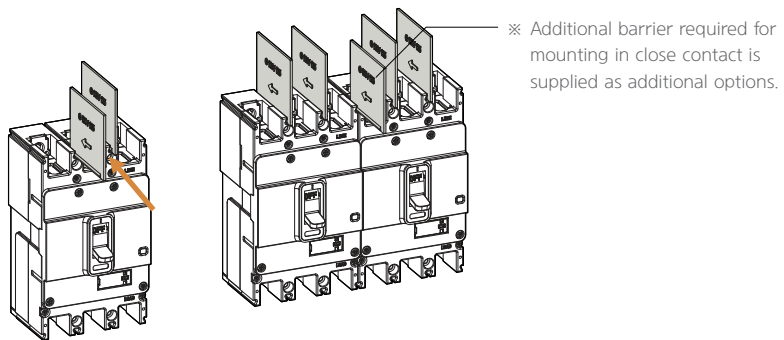

External Accessories

Rotary Handle

Rotary handle is the device to check for MCCB's ON/OFF/TRIP status from outside of switchgear. There are two types of rotary handle-extended type and direct type. All the rotary handles provide panel door locking and handle locking function by rotating clockwise the rotary handle, the circuit breaker operates "ON" each rotary handle is divided into these three types the upper line, the right line, and the left line-according to attachment direction of MCCB. The IP rating of the handle is IP40.


Direct Rotary Handle (TFG Type)

- 100 - 250 AF: Attach handle directly to the circuit breaker.
- 400 - 800 AF: Attach handle to the door of switchgear.


Type			Application
Upper Line	Right Line	Left Line	
TFG 10GM U	TFG 10GM R	TFG 10GM L	HGM100/HGE100
TFG 12GM U	TFG 12GM R	TFG 12GM L	HGM125/HGE125
TFG 25GM U	TFG 25GM R	TFG 25GM L	HGM250/HGE250
TFG 40GM U	TFG 40GM R	TFG 40GM L	HGM400/HGE400
TFG 80GM U	TFG 80GM R	TFG 80GM L	HGM800/HGE800



Direct Rotary Handle



HGM100
HGM125
HGM250



HGM400
HGM800


Extended Rotary Handle (TFH Type)

Suitable for long distance between circuit breaker and door switchgear. The handle is attached to the door of switchgear so there is no trip-button function.


Type	Application
TFH 10GM	HGM100/HGE100
TFH 12GM	HGM125/HGE125
TFH 25GM	HGM250/HGE250
TFH 40GM	HGM400/HGE400
TFH 80GM	HGM800/HGE800



Extended Rotary Handle

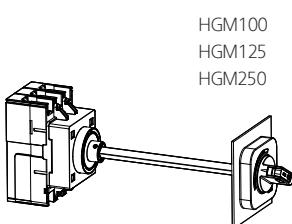


HGM100
HGM125
HGM250



HGM400
HGM800

Category of Handle in Accordance with Circuit-Breaker's Installation Type


Rotary handle is divided into the following three types according to the direction of power supply.

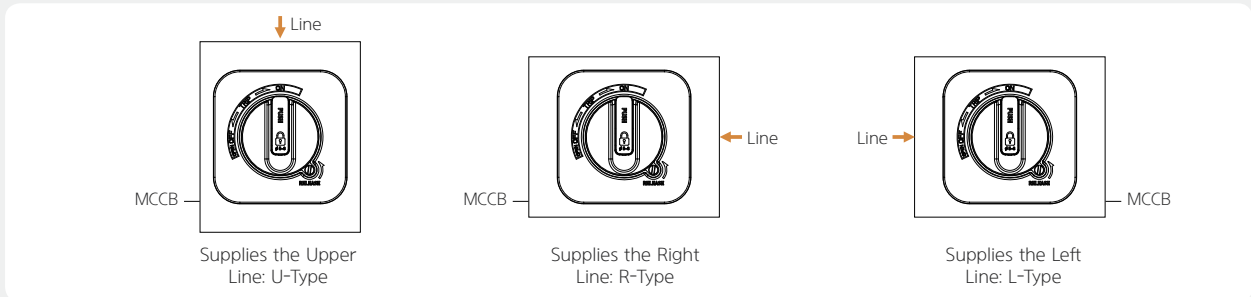

How to Operate Handle


Operating direction: To turn 'ON' the circuit breaker function, rotate handle clockwise.

- Circuit breaker ON: Rotating the handle to ON position. (Figure 1)
- Circuit breaker OFF: Rotating the handle to OFF position. (Figure 2)
- Circuit breaker TRIP: If circuit breaker trips, the handle will switch automatically TRIP position. (Figure 3)
- If you rotate the handle to RESET position first after the circuit breaker is tripped (Figure 4) and then rotate the handle to ON position, the circuit breaker operate ON (Figure 1).
- If you need to open door when handle is in the ON state, rotate the RELEASE screw to direction of the arrow first and then open the door (Figure 5).



Locking Device

Locking Function	OFF State Door Lock	ON State Door Lock	Reverse Interlock	Handle Padlock
Contents	<ul style="list-style-type: none"> Impossible to open the switchgear door when the circuit breaker is in the OFF state. Possible at RESET position It is possible to open the switchgear door after rotating the handle to RESET. 	<ul style="list-style-type: none"> Impossible to open the switchgear door when the circuit breaker is in the ON state. It is possible to open the switchgear door after rotating the RELEASE screw. 	<ul style="list-style-type: none"> Impossible to put the circuit breaker in the state "ON" when the switchgear door is open. 	<ul style="list-style-type: none"> Padlocking function for prevention of handle operation. Padlock is not supplied separately. And the number of usable padlock is decided in accordance with padlock diameter. (Refer to the following table) The specifications of the applicable padlock are referred to as the following table.
Direct type (TFG)	•	•	• (100/125/250 AF)	•
Extended type (TFH)	•	•	-	•

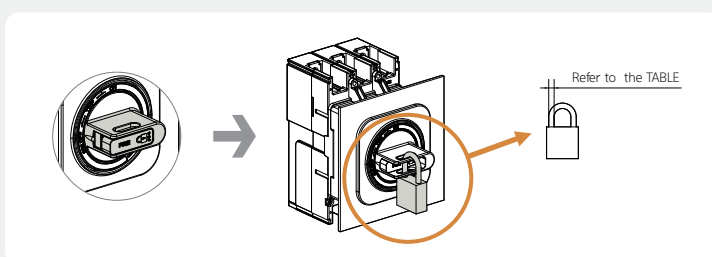

Application	Padlock Diameter	Padlock Quantity
HGM/HGE100, 125	6 - 8 mm	Ø6, Ø7: 2 EA Ø8: 1 EA
HGM/HGE250		
HGM/HGE400, 800	5 - 7 mm	3 EA

External Accessories



Front Connection of Fixed Devices

Select and use the busbar or bare cable connection according to specification of busbar and cable connected to circuit breaker.

Insulated Bar Connection

If busbar pitch of switchgear is equal to circuit breaker, it is possible to connect the circuit breaker directly using a insulation tube. When connected to the busbar, refer to the specification chart as below. Use the insulation barrier and terminal cover where applicable.


Application	Connection Busbar Dimensions (mm)				Applicable Bolt and Tightening Torque	
	A	B	C	D	Bolt Spec.	Maximum Tightening Torque (kgf x cm)
100 AF	< 7.5	< 17	$\varnothing \geq 5.5$ (≤ 50 A)	< 15	M5 Screw (≤ 50 A)	28.5
	< 7.5	< 17	$\varnothing \geq 9$ (> 50 A)	< 15	M8 Screw (> 50 A)	110
125 AF	< 7.5	< 20	$\varnothing \geq 9$	< 17	M8 Screw	110
250 AF	< 10	< 27	$\varnothing \geq 9$	< 20	M8 Hex Socket	110
400 AF	< 12.5	< 30	$\varnothing \geq 11$	< 28.5	M10 Hex Socket	270
800 AF	< 12.5	< 45	$\varnothing \geq 13$	< 31	M12 Hex Socket	470

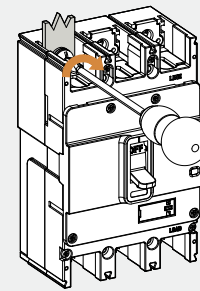

Crimped Terminal

It is necessary to follow the specifications and choose the correct cable size for the terminal. The crimped terminal must be used with the insulation barrier and terminal cover. Additional terminal is not supplied.

Application		Cu Cable Size (mm ²)	Applicable Terminal Dimensions (mm)	
AF	Rated Current		A	B
100 AF	32	6	$\varnothing \geq 5.5$	< 18
	50	10	$\varnothing \geq 5.5$	
	63	16	$\varnothing \geq 9$	
	100	35	$\varnothing \geq 9$	
125 AF	50	10	$\varnothing \geq 9$	< 21
	125	50		
250 AF	160	70	$\varnothing \geq 9$	< 28
	250	120		
400 AF	400	240	$\varnothing \geq 11$	< 30
800 AF	800	240 x 2	$\varnothing \geq 13$	< 45

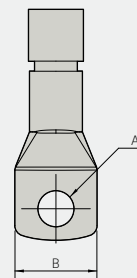

Busbar

Spreader Busbar

- Used to fit the size of the cable or standards of the switchgear. (Not change the pitch between the poles)

Expanded Busbar

- Used to expand the insulation distance. (Expansion of the pitch between the poles)

Application		Straight Busbar (Spreader)		Spreader Busbar (Expanded)	
Type	Pole	Type	Pitch	Type	Pitch
HGM250	3	TBB 25GP 3S	35 mm	TBB 25GP 3E45	45 mm
	4	TBB 25GP 4S		TBB 25GP 4E45	
HGM400	3	TBB 40GM 3S	44 mm	TBB 40GM 3E59	59 mm
	4	TBB 40GM 4S		TBB 40GM 4E59	
HGM800	3	TBB 80GM 3S	70 mm	-	-
	4	TBB 80GM 4S		-	

※ Quantity per set: 3P - 3 EA, 4P - 4 EA



Spreader Busbar (Spreader)




Expanded Busbar (Expanded)

LUG Terminal

Used to connect the cable to circuit breakers without crimped terminal. It should be used according to size of cable and rating of product.

Application		Bare Cables Connection		Application				Tightening Torque (kgf x cm)
Type	Pole	Type	Material	EA	Material	S (mm ²)	L (mm)	
HGM100 (≤ 50 A)	2	CTB 10GM 2S50	Al	1	Cu/Al	2.5 - 16	14	60
	3	CTB 10GM 3S50						
	4	CTB 10GM 4S50						
HGM100 (> 50 A)	2	CTB 10GM 2S100	Al	1	Cu/Al	16 - 50	14	60
	3	CTB 10GM 3S100						
	4	CTB 10GM 4S100						
HGM125	2	CTB 12GM 2S	Al	1	Cu/Al	2.5 - 70	14	60
	3	CTB 12GM 3S						
	4	CTB 12GM 4S						
HGM250	2	CTB 25GM 2S	Al	1	Cu/Al	50 - 185	19	140
	3	CTB 25GM 3S						
	4	CTB 25GM 4S						
HGM400	3	CTB 40GM 3S	Al	2	Cu/Al	60 - 240	30 - 60	353
	4	CTB 40GM 4S						
HGM800	3	CTB 80GM 3S	Al	3	Cu/Al	60 - 185	30 - 60	353
	4	CTB 80GM 4S						

※ Quantity per set: 2P - 2 EA, 3P - 3 EA, 4P - 4 EA



HGM100, 125, 250



HGM400



HGM800


External Accessories

Plug-In Connection Devices

Circuit breakers can be replaced quickly without cable separation by using Plug-in connection type.

It is more convenient to apply Plug-in type circuit breakers for important electric system (shipping, broadcasting etc).

- Easy and convenient to maintain and repair the switchgear.
- It is possible to remove/replace the circuit breaker quickly without contacting the terminal.
- Type: For switchboard (TDM/TDF), For panel board (TDA)
- Constitution: Plug-in devices, plug-in MCCB, terminal cover or Insulation barrier (Option)

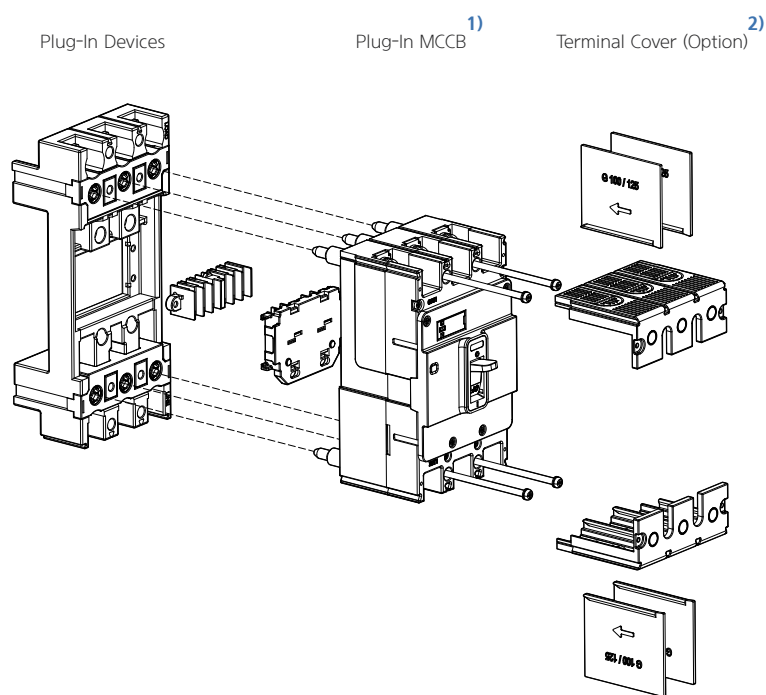

※ 1) In order to use plug-in connection devices, please apply the plug-in type MCCB.

2) In case of not using terminal cover, please install insulation barrier.

Plug-In Devices





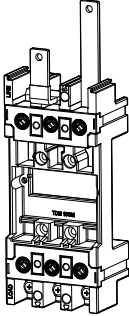
This device is used to connect plug-in MCCB to switchgear.

TDM Type

- TDM-P: All of LINE and LOAD sides consist of plug-in terminal.
- TDM-F: Only LINE side consists of plug-in terminal.

TDF Type

- Only LINE side consists of plug-in terminal but available for fixing plug-in device at switchgear as same as TDM-P

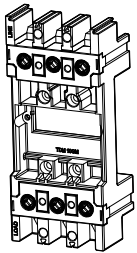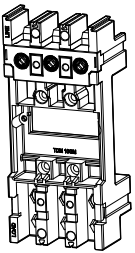
Application	For Switchgear			For Panel Board	
	Type	TDM-P	TDM-F	TDF	TDA (2 row)
Composition					
Use	LINE/LOAD	LINE	LINE	Duble base	Single base
HGM/HGE Type	100 - 800 AF	100 - 800 AF	100 - 125 AF	100 - 125 AF	100 - 125 AF
Pole	3P	3P	3P	2P (100 AF only), 3P	3P

Connection Busbar


It is used for connecting switchgear busbar to plug-in device directly.


The specifications of the applicable busbar is as follows.

(unit: mm)

Application	A	B	C	D	Remark
100 AF	< 10	< 21	$\varnothing \geq 6.5$	< 17.5	
125 AF	< 10	< 21	$\varnothing \geq 6.5$	< 19.5	
250 AF	< 17.5	< 25	$\varnothing \geq 8.5$	< 27.5	
400 AF	< 22	< 32	$\varnothing \geq 10.5$	< 38	
800 AF	< 30	< 40	$\varnothing \geq 17$	< 48.5	

(unit: mm)

Application	A	B	C	D	Remark
100 AF	< 7.5	< 15	$\varnothing \geq 7$	< 13	
125 AF	< 7.5	< 15	$\varnothing \geq 7$	< 13	
250 AF	-	-	-	-	
400 AF	-	-	-	-	
800 AF	-	-	-	-	

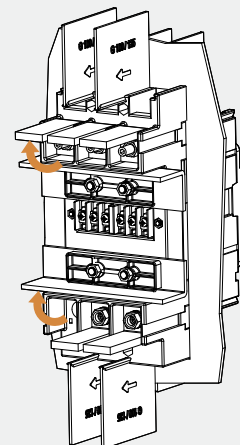

External Accessories

Rear Connection Terminal

This device is used for connecting MCCB from rear side of switchgear.

It is possible to array buubar vertically or horizontally according to assembling direction of connection.


Flat Type

Application		Rear Connection of Fixed Devices		Quantity Per Set	
Type	Pole	LINE	LOAD	Short Terminal	Long Terminal
HGM50 HGE50	2	RCT 05GM F2	RCT 05GM F2	1	1
	3	RCT 05GM F3	RCT 05GM F3	2	1
	4	RCT 05GM F4	RCT 05GM F4	2	2
HGM100 HGE100	2	RCT 10GM F2	RCT 10GM F2	1	1
	3	RCT 10GM F3	RCT 10GM F3	2	1
	4	RCT 10GM F4	RCT 10GM F4	2	2
HGM125 HGE125	2	RCT 12GM F2	RCT 12GM F2	1	1
	3	RCT 12GM F3	RCT 12GM F3	2	1
	4	RCT 12GM F4	RCT 12GM F4	2	2
HGM250 HGE250	2	RCT 25GM F2 LINE	RCT 25GM F2 LOAD	1	1
	3	RCT 25GM F3 LINE	RCT 25GM F3 LOAD	2	1
	4	RCT 25GM F4 LINE	RCT 25GM F4 LOAD	2	2
HGM400 HGE400	3	RCT 40GM F3 LINE	RCT 40GM F3 LOAD	2	1
	4	RCT 40GM F4 LINE	RCT 40GM F4 LOAD	2	2
HGM800 HGE800	3	RCT 80GM F3 LINE	RCT 80GM F3 LOAD	2	1
	4	RCT 80GM F4 LINE	RCT 80GM F4 LOAD	2	2

Short Terminal




Long Terminal

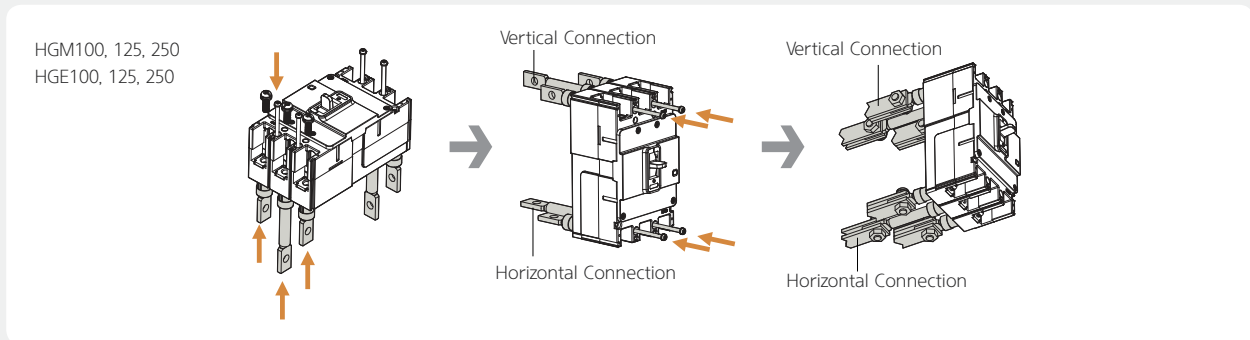

DIN Rail Adaptor

This device is used for DIN rail mounting of MCCB. (HGM/HGE100 Only)

Application		DIN Rail Adaptor	Quantity
Type	Pole		
HGM100 HGE100	2	DRA 10GM	1
	3	DRA 10GM	1
	4	DRA 10GM	2

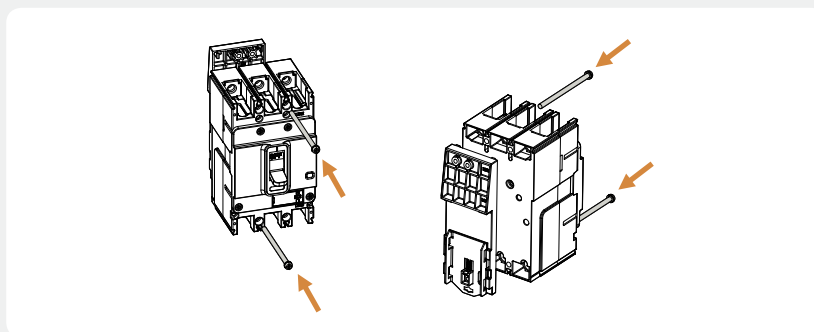


Motor Operator

This device is used for ON/OFF circuit breakers from remote position.

It can be applied at low-voltage automation system or emergency power system.



Application		MOT	Control Voltage
Type	Pole		
HGM100	3, 4	MOT 10GM	DC24 V AC/DC110 V AC/DC240 V
HGM125	3, 4	MOT 12GM	
HGM250	3, 4	MOT 25GM	
HGM400	3, 4	MOT 40GM	
HGM800	3, 4	MOT 80GM	



Ratings

Application	Mechanical Lifetime	Control Voltage	Operating Current	Operation Time (ms)		Power Consumption (W)
				Closing	Opening	
MOT 10GM	25,000	DC24 V	≤ 2.5	310	200	14
		AC/DC110 V	≤ 0.5			
		AC/DC240 V	≤ 0.5			
MOT 12GM	10,000	DC24 V	≤ 2.5	350	230	14
		AC/DC110 V	≤ 0.5			
		AC/DC240 V	≤ 0.5			
MOT 25GM	8,000	DC24 V	≤ 2.5	350	230	14
		AC/DC110 V	≤ 0.5			
		AC/DC240 V	≤ 0.5			
MOT 40GM	5,000	DC24 V	≤ 6.0	500	350	14
		AC/DC110 V	≤ 3.0			
		AC/DC240 V	≤ 2.0			
MOT 80GM	5,000	DC24 V	≤ 6.0	500	350	35
		AC/DC110 V	≤ 3.0			
		AC/DC240 V	≤ 2.0			

Control Circuit Diagram

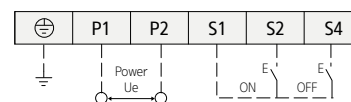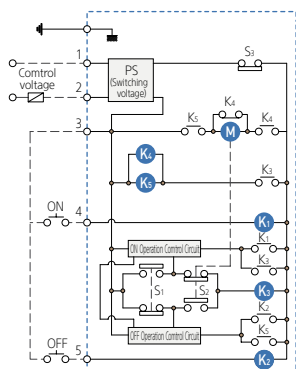

- M** : Motor
- K1** : ON Relay
- K2** : OFF Relay
- K3** : Relay for Motor
- K4** : Relay for Motor
- K5** : Relay for Motor
- K6** : Relay for Motor
- S1** : ON Limit Switch
- S2** : OFF Limit Switch
- S3** : AUTO/Manual Limit Switch

Technical Information

Standard Use Environment	54
Degree of Protection	57
Power Losses & Resistance	58
Cascading Table	60
Installation	64
Standard Configuration	66
MCCB/ELCB Assembly and Terminal Mounting Specification	67

Technical Information

Standard Use Environment

Temperature Derating


Overcurrent characteristics of MCCB has been set to the ambient temperature 40 degrees celsius. If the ambient temperature is less or more than 40 degrees celsius, the overcurrent characteristics can be changed.

If the Ambient Temperature is Less than 40 Degrees Celsius

In order to ensure that circuit breaker's overcurrent meet the derating curve at the given ambient temperature, the rear current (Ir) should be adjusted. The temperature correction ratio for each MCCB is shown on the circuit breaker derating curve.

If the Ambient Temperature is More than 40 Degrees Celsius

If the internal temperature of the MCCB is over 40 degrees, thermal damage to the insulating material inside the MCCB can occur causing the circuit breaker to trip at an early stage. When applying ambient temperatures at higher than 40 degrees celsius, you must adjust the rated current as shown in the rated current correction table below.

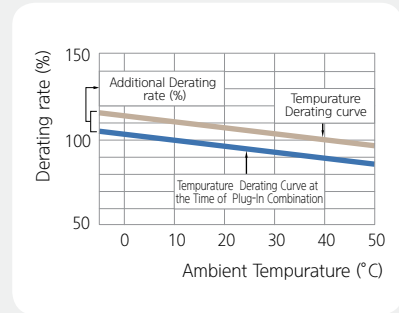

In (Rated Current): Circuit breaker's rating at about ambient temperature 40 °C

Ir (Real Current): Circuit breaker's rating at about ambient temperature

$I_r = \text{Correction ratio (\%)} \times I_n$



Rated Current Derating Tabel: HG Type / Standard Mounting (Fixed)

Model	Rated Current (A)	Ambient Temperature (°C)									
		(A)	20	30	40	45	50	55	60	65	70
HGM100 HGE100	16	18.9	18.6	17.8	16	15.2	14.6	14.1	13.6	13.2	12.8
	20	23.58	23.3	22.2	20	19.1	18.3	17.6	17.0	16.5	16.0
	25	26.8	26.2	25.6	25	24.7	24.4	24.1	23.8	23.5	23.2
	32	34.3	33.5	32.8	32	31.6	32.2	30.9	30.5	30.1	29.7
	40	42.9	41.9	41.0	40	38.5	39.0	38.6	38.1	37.6	37.1
	50	53.6	52.4	51.2	50	49.4	48.8	48.2	47.6	47.0	46.4
	63	67.5	66.0	64.5	63	62.2	61.5	60.7	60.0	59.2	58.5
	75	80.4	78.6	76.8	75	74.1	73.2	72.3	71.4	70.5	69.6
	80	85.8	83.8	81.9	80	79.0	78.1	77.1	76.2	75.2	74.2
HGM125 HGE125	16	18.9	18.6	17.8	16	15.2	14.6	14.1	13.6	13.2	12.8
	20	23.6	23.3	22.2	20	19.1	18.3	17.6	17.0	16.5	16.0
	25	27.3	26.6	25.8	25	24.6	24.2	23.8	23.4	23.0	22.6
	32	35.0	34.0	33.0	32	31.5	31.0	30.5	30.0	29.5	29.0
	40	43.8	42.5	41.3	40	39.4	38.8	38.1	37.5	36.8	36.2
	50	54.7	53.1	51.6	50	49.2	48.4	47.7	46.9	46.1	45.3
	63	68.9	66.9	65.0	63	62.0	61.0	60.1	59.1	58.0	57.0
	75	82.0	79.7	77.3	75	73.8	72.7	71.5	70.3	69.1	67.9
	80	87.5	85.0	82.5	80	78.8	77.5	76.3	75.0	73.7	72.4
HGM250 HGE250	100	107.8	105.2	102.6	100	96.0	94.0	92.0	88.0	85.5	83.0
	125	134.8	131.5	128.3	125	120.0	117.5	115.0	110.0	106.9	103.8
	150	161.7	157.8	153.9	150	144.0	141.0	138.0	132.0	128.3	124.5
	160	172.5	168.3	164.2	160	153.6	150.4	147.2	140.8	136.8	132.8
	175	188.7	184.1	179.6	175	168.0	164.5	161.0	154.0	149.6	145.3
	200	215.6	210.4	205.2	200	192.0	188.0	184.0	176.0	171.0	166.0
	225	242.6	236.7	230.9	225	216.0	211.5	207.0	198.0	192.4	186.8
250	269.5	263.0	256.5	250	240.0	235.0	230.0	220.0	213.8	207.5	



Rated Current Derating Tabel: HG Type / Standard Mounting (Fixed)

Model	Rated current (A)	Ambient temperature (°C)									
		10	20	30	40	45	50	55	60	65	70
HGM400 HGE400	250	269.5	263.0	256.5	250	246.8	243.5	240.2	237.0	233.6	230.3
	300	324	316.5	309	300	291	282	273	264	255	246
	350	378	369.25	360.5	350	340	330	320	310	300	290
	400	432	422	412	400	388	376	364	352	340	328
HGM630/800 HGE630/800	500	540	527.5	515	500	485	470	455	440	425	410
	630	680.4	664.65	648.9	630	611	592	573	554	535	516
	700	756	738.5	721	700	679	658	637	616	595	574
	800	864	844	824	800	776	752	728	704	680	656



Rated Current Derating Tabel: HG Type / Plug-In Type

Model	Rated Current (A)	Ambient Temperature (°C)									
		10	20	30	40	45	50	55	60	65	70
HGM100 HGE100	16	18.5	18.3	17.4	16	14.9	14.3	13.8	13.3	12.9	12.5
	20	23.1	22.8	21.8	20	18.7	17.9	17.2	16.7	16.1	15.7
	25	26.3	25.7	25.1	25	24.2	23.9	23.6	23.3	23.0	22.7
	32	33.6	32.9	32.1	31	31.0	31.6	30.2	29.9	29.5	29.1
	40	42.0	41.1	40.1	39	37.7	38.3	37.8	37.3	36.8	36.4
	50	52.5	51.4	50.2	49	48.4	47.8	47.2	46.6	46.1	45.5
	63	66.2	64.7	63.2	62	61.0	60.3	59.5	58.8	58.0	57.3
	75	78.8	77.0	75.3	74	72.6	71.7	70.9	70.0	69.1	68.2
	80	84.0	82.2	80.3	78	77.5	76.5	75.6	74.6	73.7	72.8
HGM125 HGE125	100	105.1	102.7	100.4	98	96.8	95.6	94.5	93.3	92.1	90.9
	16	18.5	18.2	17.4	16	14.9	14.3	13.8	13.3	12.9	12.5
	20	23.1	22.8	21.8	20	18.7	17.9	17.2	16.7	16.1	15.7
	25	26.8	26.0	25.3	25	24.1	23.7	23.4	23.0	22.6	22.2
	32	34.3	33.3	32.3	31	30.9	30.4	29.9	29.4	28.9	28.4
	40	42.9	41.7	40.4	39	38.6	38.0	37.4	36.8	36.1	35.5
	50	53.6	52.7	50.5	49	48.2	47.5	46.7	45.9	45.1	44.4
	63	67.5	65.6	63.7	62	60.8	59.8	58.8	57.9	56.9	55.9
	75	80.4	78.1	75.8	74	72.4	71.2	70.1	68.9	67.7	66.5
80	85.8	83.3	80.9	78	77.2	76.0	74.7	73.5	72.2	71.0	
HGM250 HGE250	100	107.2	104.1	101.1	98	96.5	94.9	93.4	91.9	90.2	88.7
	125	134.0	130.2	126.3	123	120.6	118.7	116.8	114.8	112.8	110.9
	100	103.5	101.0	98.5	96	92.2	90.2	88.3	84.5	82.1	79.7
	125	129.4	126.2	123.1	120	115.2	112.8	110.4	105.6	102.6	99.6
	150	155.3	151.5	147.8	144	138.2	135.4	132.5	126.7	123.1	119.5
	160	165.6	161.6	157.6	154	147.5	144.4	141.3	135.2	131.3	127.5
	175	181.1	176.7	172.4	168	161.3	157.9	154.6	147.8	143.6	139.4
	200	207.0	202.0	197.0	192	184.3	180.5	176.6	169.0	164.2	159.4
HGM400 HGE400	225	232.9	227.3	221.6	216	207.4	203.0	198.7	190.1	184.7	179.3
	250	258.7	252.5	246.2	240	230.4	225.6	220.8	211.2	205.2	199.2
	250	261.4	255.1	248.8	242.5	239.3	236.2	233.0	229.9	226.6	223.4
	300	314.3	307.0	299.7	291.0	282.3	273.5	264.8	256.1	247.4	238.6
HGM630/800 HGE630/800	350	366.7	358.2	349.7	339.5	329.8	320.1	310.4	300.7	291.0	281.3
	400	405.2	395.8	387.6	378	373.7	367.9	363.2	357.9	352.6	347.3
	500	523.8	511.7	499.6	485.0	470.5	455.9	441.4	426.8	412.3	397.7
	630	660.0	644.7	629.4	611.1	592.7	574.2	555.8	537.4	519.0	500.5
HGM630/800 HGE630/800	700	725.8	709.0	692.2	672.0	651.8	631.7	611.5	591.4	571.2	551.0
	800	777.8	759.7	744.1	726	717.4	706.3	697.3	687	676.9	666.7

Technical Information

Altitude Derating

It does not affect the characteristics of circuit breaker at an altitude of less than 2000 m. Characteristics of insulation and air cooling are reduced at an altitude of more than 2000 m. You should adjust rated current and rated voltage as shown in the table below at an altitude of more than 2000m. However, this will not change the characteristics of the circuit breaker.

Circuit Breaker	Altitude	2,000 m	3,000 m	4,000 m	5,000 m
HGM type MCCB 100 - 800 AF	Withstand voltage (V)	3,000	2,500	2,100	1,800
	Insulation voltage (V) U_i	1,000	850	750	600
	Maximum operational voltage (V) U_e	690	590	520	460
	Average through-current (A), Based on 40 °C $I_n \times$	1	0.96	0.93	0.9
HGE type ELCB 100 - 800 AF	Withstand voltage (V)	3,000	2,500	2,100	1,800
	Insulation voltage (V) U_i	800	700	600	500
	Maximum operational voltage (V) U_e	690	590	520	460
	Average through-current (A), Based on 40 °C $I_n \times$	1	0.96	0.93	0.9

Vibrations

The excessive vibration makes some troubles in the breakage of circuit breaker, the dynamic strength of failure, applying an electric current, and operating characteristics so, choosing the circuit breaker, you need due consideration in these environmental stress. These stress is generated by the impact of operating open and close test, vibration during transport, and the influence of adjacent equipment. Our circuit breaker is verified by test in accordance with standard of internal impulse performance.

Vibrations Test

Vibration test carried out in compliance to the shipping certificate authority to ensure the level meets the IEC60068-2-6 standards for vibration. The test verifies the resonance performance and vibration durability based on the following

Resonance Test

You can alter the frequency as shown in the following onerange of sinusoidal wave to see if there is any occurrence of vibration on a specific part of MCCB.


- 5 - 13.2 (Hz): Displacement amplitude 1 mm
- 3.2 - 100 (Hz): Acceleration amplitude 0.7 g

Vibration Durability Test

A sinusoidal wave with ferequency of 30 Hz is manually created to check the operational status for 90 minutes.





- 30 (Hz): Acceleration amplitude 0.7 g

Seismic Performance and Shock Tolerance Chart

Part	Seismic Performance	
Test condition	Mounting vibration, Direction of impulse	<ul style="list-style-type: none"> • Vertical mounting • Top-down, Left-right, Front-back 
	Status of MCCB	<ul style="list-style-type: none"> • None-conduction (ON or OFF status) • Status where rated current is conducted until the temperature of MCCB becomes constant and contiuous.
Test result	Judgement condition	<ul style="list-style-type: none"> • If it is ON, it should not be OFF • If it is OFF, it should not be ON • No abnormal status such as damage, transformation, or annealing of nut part • The characteristics of switch and trip after the test must be normal

Degree of Protection

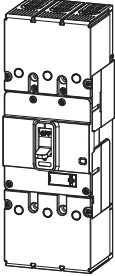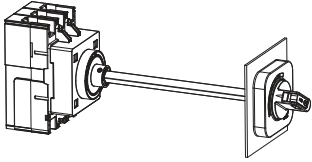

By stipulating the IP degree of MCCB based on IEC 60529 standard, the IP degree is changed according to the product condition.

Condition	Circuit Breaker	Circuit Breaker + Terminal Cover	Circuit Breaker + Terminal Cover + Rotary Handle (Front Contact)	Circuit Breaker + Terminal Cover + Rotary Handle (Extended)
Exterior				
Degree of protection	IP20	IP40	IP40	IP40



Technical Information

Power Consumption & Resistance

HGM Type MCCB

Type	Rated Current (A)	HGM100		HGM125		HGM250		HGM400		HGM800	
		R/Pole (mΩ)	P/Pole (W)	R/Pole (mΩ)	P/Pole (W)	R/Pole (mΩ)	P/Pole (W)	R/Pole (mΩ)	P/Pole (W)	R/Pole (mΩ)	P/Pole (W)
Fixed / Adj 	16	16.0	4.10	17.0	4.35						
	20	16.0	6.40	17.0	6.80						
	25	4.0	2.50	4.3	2.69						
	32	4.0	4.10	3.0	3.07						
	40	2.9	4.64	2.6	4.16						
	50	2.3	5.75	1.7	4.25						
	63	1.7	6.75	1.3	5.16						
	75	1.2	6.75	1.0	5.63						
	80	0.9	5.76	1.0	6.40						
	100	0.9	9.00	0.7	6.50	0.6	5.60				
	125			0.6	9.38	0.4	6.72				
	150					0.4	8.55				
	160					0.3	8.70				
	175					0.3	9.80				
	200					0.3	10.80				
	225					0.3	13.67				
	250					0.2	13.75	0.2	14.38		
	300							0.2	18.90		
	350							0.2	23.28		
	400							0.2	27.20		
500									0.1	32.50	
600									0.1	43.20	
700									0.1	53.90	
800									0.1	64.00	
Plug-in 	16	16.1	4.12	17.1	4.37						
	20	16.1	6.43	17.1	6.83						
	25	4.1	2.55	4.4	2.74						
	32	4.1	4.18	3.1	3.15						
	40	3.0	4.77	2.7	4.29						
	50	2.4	5.95	1.8	4.45						
	63	1.8	7.06	1.4	5.48						
	75	1.3	7.20	1.1	6.08						
	80	1.0	6.27	1.1	6.91						
	100	1.0	9.80	0.7	7.30	0.6	6.40				
	125			0.7	10.63	0.5	7.97				
	150					0.5	10.35				
	160					0.4	10.75				
	175					0.4	12.25				
	200					0.4	14.00				
	225					0.4	17.72				
	250					0.3	18.75	0.3	19.38		
	300							0.3	26.10		
	350							0.3	33.08		
	400							0.3	40.00		
500									0.2	52.50	
600									0.2	72.00	
700									0.2	93.10	
800									0.2	115.20	

HGE Type ELCB

Type	Rated Current (A)	HGE100		HGE125		HGE250		HGE400		HGE800	
		R/Pole (mΩ)	P/Pole (W)	R/Pole (mΩ)	P/Pole (W)	R/Pole (mΩ)	P/Pole (W)	R/Pole (mΩ)	P/Pole (W)	R/Pole (mΩ)	P/Pole (W)
Fixed 	16	14.3	3.66	12.9	3.30						
	20	14.3	5.72	12.9	5.16						
	25	4.9	3.04	4.2	2.63						
	32	4.9	4.98	3.9	4.00						
	40	2.9	4.64	3.0	4.85						
	50	2.4	6.03	1.8	4.49						
	63	2.1	8.49	1.7	6.59						
	75	1.3	7.14	1.1	6.40						
	80	1.0	6.65	1.1	7.28						
	100	1.0	9.77	0.8	8.42	0.5	5.44				
	125			0.7	11.56	0.5	7.32				
	150					0.4	8.10				
	160					0.3	8.67				
	175					0.3	10.06				
	200					0.3	11.37				
	225					0.3	14.65				
	250					0.2	15.13	0.3	16.25		
	300							0.2	21.60		
	350							0.2	26.95		
	400							0.2	32.00		
500									0.2	40.00	
600									0.2	54.00	
700									0.1	68.60	
800									0.1	83.20	
Plug-in 	16	14.3	3.66	12.9	3.30						
	20	14.3	5.72	12.9	5.16						
	25	4.9	3.04	4.4	2.75						
	32	4.9	4.98	3.9	4.00						
	40	2.9	4.64	3.0	4.85						
	50	2.4	6.03	1.8	4.49						
	63	2.1	8.49	1.7	6.59						
	75	1.3	7.14	1.1	6.40						
	80	1.0	6.65	1.1	7.28						
	100	1.0	9.77	0.8	8.42	0.5	5.44				
	125			0.7	11.56	0.5	7.32				
	150					0.4	8.10				
	160					0.3	8.67				
	175					0.3	10.06				
	200					0.3	11.37				
	225					0.3	14.65				
	250					0.2	15.13	0.3	21.25		
	300							0.3	28.80		
	350							0.3	36.75		
	400							0.3	44.80		
500									0.2	60.00	
600									0.2	82.80	
700									0.2	107.80	
800									0.2	134.40	

Technical Information

Cascading Table

AC220/240 V

Upstream: HGM30, HGM50, HGM60, HGM100, HGM125, HGM160, HGM250, HGM400

Downstream: HiBD63, HiBD125, HGM30, HGM50, HGM60, HGM100

Upstream	HGM30		HGM50				HGM60				HGM100			
	E	S	E	S	H	L	E	S	H	L	E	S	H	L
Breaking capacity [Icu] (kA r.m.s.)	35	50	35	50	85	100	35	50	50	50	35	50	50	50
Downstream breaking capacity [Icu] (kA r.m.s.)	Enhanced breaking capacity													
HiBD63E	10	15	15	15	15	15	15	15	15	15	15	15	15	15
HiBD63S	15	20	20	20	20	20	20	20	20	20	20	20	20	20
HiBD63N	20			35	40	40	40	35	40	40	40	35	40	40
HiBD63H	25			35	50	50	50	35	40	40	40	35	40	40

Upstream	HGM125				HGM160				HGM250			
	E	S	H	L	E	S	H	L	E	S	H	L
Breaking capacity [Icu] (kA r.m.s.)	50	65	85	100	50	65	85	100	50	65	85	100
Downstream breaking capacity [Icu] (kA r.m.s.)	Enhanced breaking capacity											
HiBD63E	10	15	15	15	15	15	15	15	15	15	15	15
HiBD63S	15	20	20	20	20	20	20	20	20	20	20	20
HiBD63N	20	40	40	40	40	40	40	40	40	40	40	40
HiBD63H	25	40	50	50	50	40	50	50	50	40	50	50
HiBD125	25	40	40	40	40	40	40	40	40	40	40	40

Upstream	HGM30		HGM50				HGM60				HGM100			
	E	S	E	S	H	L	E	S	H	L	E	S	H	L
Breaking capacity [Icu] (kA r.m.s.)	35	50	35	50	85	100	35	50	50	50	35	50	50	50
Downstream breaking capacity [Icu] (kA r.m.s.)	Enhanced breaking capacity													
HGM30E	35		50		50	65	65		50	50	50		50	50
HGM50E	35				50	65	70		50	50	50		50	50
HGM50S	50					70	85							
HGM50H	85						100							
HGM60E	35								50	50	50		50	50
HGM100E	35												50	50

Upstream	HGM125				HGM160				HGM250				HGM400				
	E	S	H	L	E	S	H	L	E	S	H	L	E	S	H	L	
Breaking capacity [Icu] (kA r.m.s.)	50	65	85	100	50	65	85	100	50	65	85	100	50	75	100	125	
Downstream breaking capacity [Icu] (kA r.m.s.)	Enhanced breaking capacity																
HGM30E	35	50	65	65	65	50	65	65	65	50	65	65	65	50	65	65	65
HGM30S	50		65	65	65		65	65	65		65	65	65		65	65	65
HGM50E	35	50	65	65	70	50	65	65	70	50	65	65	70	50	65	65	70
HGM50S	50		65	70	85		65	70	85		65	70	85		65	70	85
HGM50H	85				100				100				100				100
HGM60E	35	50	65	70	70	50	65	70	70	50	65	70	70	50	65	70	70
HGM60S	50		65	70	70		65	70	70		65	70	70		65	70	70
HGM60H	50		65	70	70		65	70	70		65	70	70		65	70	70
HGM60L	50		65	70	70		65	70	70		65	70	70		65	70	70
HGM100E	35	50	65	70	70	50	65	70	70	50	65	70	70	50	65	70	70

AC220/240 V

Upstream: HGM125, HGM160, HGM250, HGM400, HGM600, HGM800

Downstream: HGM100, HGM160, HGM250, HGM400, HGM600, HGM800

Upstream	HGM125				HGM160				HGM250				HGM400			
	E	S	H	L	E	S	H	L	E	S	H	L	E	S	H	L
Breaking capacity [Icu] (kA r.m.s.)	50	65	85	100	50	65	85	100	50	65	85	100	50	75	100	125
Downstream breaking capacity [Icu] (kA r.m.s.)	Enhanced breaking capacity															
HGM100S	50	65	70	70		65	70	70		65	70	70		65	70	70
HGM100H	50	65	70	70		65	70	70		65	70	70		65	70	70
HGM100L	50	65	70	70		65	70	70		65	70	70		65	70	70
HGM125E	50	65	85	100		65	85	100		65	85	100		65	85	100
HGM125S	65		85	100			85	100			85	100			85	100
HGM125H	85			100				100				100				100

Upstream	HGM160				HGM250				HGM400			
	E	S	H	L	E	S	H	L	E	S	H	L
Breaking capacity [Icu] (kA r.m.s.)	50	65	85	100	50	65	85	100	50	75	100	125
Downstream breaking capacity [Icu] (kA r.m.s.)	Enhanced breaking capacity											
HGM160E	50	65	85	100		65	85	100		75	85	100
HGM160S	65		85	100			85	100			85	100
HGM160H	85			100				100			100	125
HGM160L	100											125
HGM250E	50					65	85	100		75	85	100
HGM250S	65						85	100			85	100
HGM250H	85							100			100	125
HGM250L	100											125

Upstream	HGM600				HGM800		
	E	S	H	L	S	H	L
Breaking capacity [Icu] (kA r.m.s.)	50	75	100	125	75	100	125
Downstream breaking capacity [Icu] (kA r.m.s.)	Enhanced breaking capacity						
HGM250E	50	75	85	100	75	85	100
HGM250S	65		85	100		85	100
HGM250H	85		100	125		100	125
HGM250L	100			125			125
HGM400E	50	75	85	100	75	85	100
HGM400S	75		85	100		85	100
HGM400H	100			125			125
HGM600E	50	75	85	100	75	85	100
HGM600S	75		85	100		85	100
HGM600H	100			125			125
HGM800S	75					70	85
HGM800H	100						85

Technical Information

Cascading Table

AC440/460 V

Upstream: HGM30, HGM50, HGM60, HGM100, HGM125, HGM160, HGM250, HGM400

Downstream: HiBD63, HiBD125, HGM30, HGM50, HGM60, HGM100

Upstream	HGM30		HGM50				HGM60				HGM100			
	E	S	E	S	H	L	E	S	H	L	E	S	H	L
Breaking capacity [Icu] (kA r.m.s.)	16	20	16	20	38	55	16	20	26	30	16	20	26	30
Downstream breaking capacity [Icu] (kA r.m.s.)	Enhanced breaking capacity													
HiBD63E	6	10	10	10	10	10	10	10	10	10	10	10	10	10
HiBD63S	7.5	14	14	14	14	14	14	14	14	14	14	14	14	14
HiBD63N	10			16	20	20	20	16	20	20	20	16	20	20
HiBD63H	15			16	20	26	26	16	20	20	20	16	20	20

Upstream	HGM125				HGM160				HGM250			
	E	S	H	L	E	S	H	L	E	S	H	L
Breaking capacity [Icu] (kA r.m.s.)	20	26	38	55	20	26	38	55	20	26	38	55
Downstream breaking capacity [Icu] (kA r.m.s.)	Enhanced breaking capacity											
HiBD63E	6	10	10	10	10	10	10	10	10	10	10	10
HiBD63S	7.5	14	14	14	14	14	14	14	14	14	14	14
HiBD63N	10	16	20	20	20	16	20	20	20	16	20	20
HiBD63H	15	16	20	26	26	16	20	26	26	16	20	26
HiBD125	15	16	20	26	26	16	20	26	26	16	20	26

Upstream	HGM30		HGM50				HGM60				HGM100			
	E	S	E	S	H	L	E	S	H	L	E	S	H	L
Breaking capacity [Icu] (kA r.m.s.)	16	20	16	20	38	55	16	20	26	30	16	20	26	30
Downstream breaking capacity [Icu] (kA r.m.s.)	Enhanced breaking capacity													
HGM30E	16	20		20	26	30		20	20	20		20	20	20
HGM30S	20				30	30			26	26			26	26
HGM50E	16			20	26	30		20	20	20		20	20	20
HGM50S	20				30	38			26	26			26	26
HGM50H	38					55								
HGM60E	16							20	20	20		20	20	20
HGM60S	20								26	26			26	26
HGM60H	26									30				30
HGM100E	16											20	20	20
HGM100S	20												26	26
HGM100H	26													30

Upstream	HGM125				HGM160				HGM250				HGM400				
	E	S	H	L	E	S	H	L	E	S	H	L	E	S	H	L	
Breaking capacity [Icu] (kA r.m.s.)	20	26	38	55	20	26	38	55	20	26	38	55	38	50	70	85	
Downstream breaking capacity [Icu] (kA r.m.s.)	Enhanced breaking capacity																
HGM30E	16	20	26	26	30	20	26	26	30	20	26	26	30	26	26	30	30
HGM30S	20		26	30	30		26	30	30		26	30	30		30	30	30
HGM50E	16	20	26	26	30	20	26	30	30	20	26	30	30	20	26	30	30
HGM50S	20		26	30	38		26	30	38		26	30	38	20	30	38	38
HGM50H	38				55				55				55		50	70	70
HGM50L	55															70	70
HGM60E	16	20	26	26	30	20	26	26	30	20	26	26	30	26	26	30	30
HGM60S	20		26	30	30		26	30	30		26	30	30	26	30	30	30
HGM60H	26			30	38			30	38			30	38	30	38	38	38
HGM60L	30				38				38				38		38	38	38
HGM100E	16	20	26	26	30	20	26	26	30	20	26	26	30	26	26	30	30
HGM100S	20		26	30	30		26	30	30		26	30	30	26	30	30	30
HGM100H	26			30	38			30	38			30	38	30	38	38	38
HGM100L	26				38				38				38		38	38	38

AC440/460 V

Upstream: HGM125, HGM160, HGM250, HGM400, HGM600, HGM800

Downstream: HGM100, HGM160, HGM250, HGM400, HGM600, HGM800

Upstream	HGM125				HGM160				HGM250				HGM400			
	E	S	H	L	E	S	H	L	E	S	H	L	E	S	H	L
Breaking capacity [Icu] (kA r.m.s.)	20	26	38	55	20	26	38	55	20	26	38	55	38	50	70	85
Downstream breaking capacity [Icu] (kA r.m.s.)	Enhanced breaking capacity															
HGM125E	20	26	30	38		26	30	38		26	30	38	26	30	38	38
HGM125S	26		38	38			38	38			38	38		38	50	50
HGM125H	38			55				55				55		50	70	70
HGM125L	55														70	70
HGM160E	20					26	30	38		26	30	38	26	30	38	38
HGM160S	26						38	50			38	50	30	38	50	50
HGM160H	38							55				55		50	70	70
HGM160L	55														70	70

Upstream	HGM250				HGM400				HGM600				HGM800			
	E	S	H	L	E	S	H	L	E	S	H	L	S	H	L	
Breaking capacity [Icu] (kA r.m.s.)	20	26	38	55	38	50	70	85	38	50	70	85	50	70	85	
Downstream breaking capacity [Icu] (kA r.m.s.)	Enhanced breaking capacity															
HGM250E	20	26	30	38	26	30	38	38	26	30	38	38	30	38	38	
HGM250S	26		38	50	30	38	50	50	30	38	50	50	38	50	50	
HGM250H	38			55		50	70	70		50	70	70	50	70	70	
HGM250L	55						70	70			70	70			70	
HGM400E	38					50	70	70		50	70	70	50	70	70	
HGM400S	50						70	85			70	85		70	85	
HGM400H	70							85				85			85	
HGM600E	38									50	70	70	50	70	70	
HGM600S	50										70	85		70	85	
HGM600H	70											85			85	
HGM800S	50													70	85	
HGM800H	70														85	

Technical Information


Installation

Safety Clearance

When installing a circuit breaker, safety clearances must be kept among the breakers, panels, busbars and other protection devices installed nearby. When a short circuit interruption occurs, high temperature gas occurs and the gas is expelled above the arc chambers of the circuit breaker. In order to allow the gas to be distributed and to prevent fire and arcing or short-circuit currents, safety clearances are required.


※ 차단기 단자 사이에 절연 베리어를 취부하지 않을 경우, 2차 단락 사고가 발생할 위험이 있으니 필히 사용하시기 바랍니다.

The separation distance in the case the circuit breaker is installed side by side.

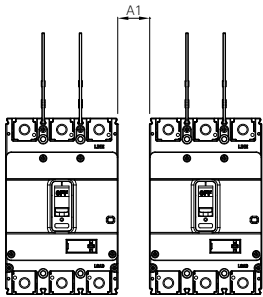


※ Using minimum separation distance (A=0), you should assemble terminal cover and phase barrier between the product.


Circuit breaker and the panel up/down/left/right's distance.

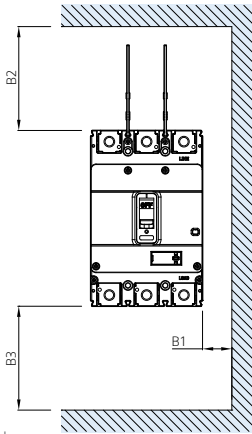

Circuit breaker and panel front/back distance.

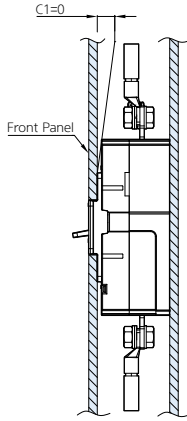

Distance between the circuit breaker when the live part is exposed

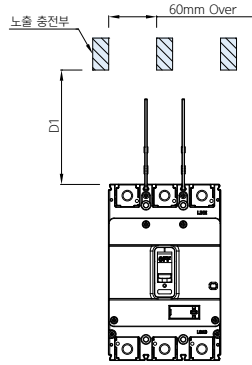


※ If the distance of both conductors is less than 60mm, please insulate the charging part.

HGM Type's Minimum Insulation Distance.

Type	Minimum Clearance (mm)											
	460 V						220 V					
	A1	B1	B2	B3	C1	D1	A1	B1	B2	B3	C1	D1
HGM30E/S	0	25	50	35	0	85	0	15	50	20	0	70
HGM50E/S	0	25	50	35	0	85	0	15	50	20	0	70
HGM100E/S/H/L	0	25	50	35	0	85	0	15	50	20	0	70
HGM50H/L	0	25	50	35	0	85	0	15	50	20	0	70
HGM125E/S/H/L	0	25	50	35	0	85	0	15	50	20	0	70
HGM160E/S/H/L	0	40	80	60	0	140	0	20	80	30	0	110
HGM250E/S/H/L	0	40	80	60	0	140	0	20	80	30	0	110
HGE30E/S	0	25	50	35	0	85	0	15	50	20	0	70
HGE50E/S	0	25	50	35	0	85	0	15	50	20	0	70
HGE100E/S/H/L	0	25	50	35	0	85	0	15	50	20	0	70
HGE50H/L	0	25	50	35	0	85	0	15	50	20	0	70
HGE125E/S/H/L	0	25	50	35	0	85	0	15	50	20	0	70
HGE160E/S/H/L	0	40	80	60	0	140	0	20	80	30	0	110
HGE250E/S/H/L	0	40	80	60	0	140	0	20	80	30	0	110
HGM400E/S/H/L	0	80	120	80	0	200	0	40	120	40	0	160
HGM800E/S/H/L	0	80	120	80	0	200	0	40	120	40	0	160
HGE400E/S/H/L	0	80	120	80	0	200	0	40	120	40	0	160
HGE800E/S/H/L	0	80	120	80	0	200	0	40	120	40	0	160

Installation Angle


The HGM circuit breakers can be installed vertically or horizontally without changing the characteristics. Please refer to detail installation direction shown in the figure below.

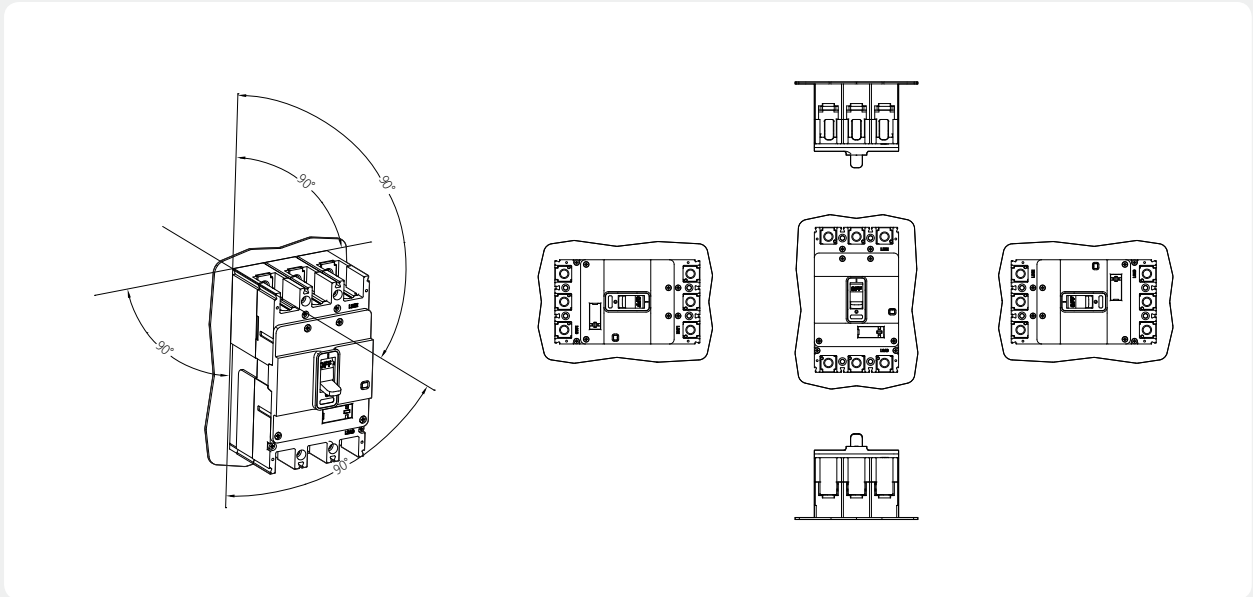

Power Supply Connection

HGM/HGE Type

Please confirm LINE/LOAD mark at circuit breaker's front cover before connecting terminal wire.

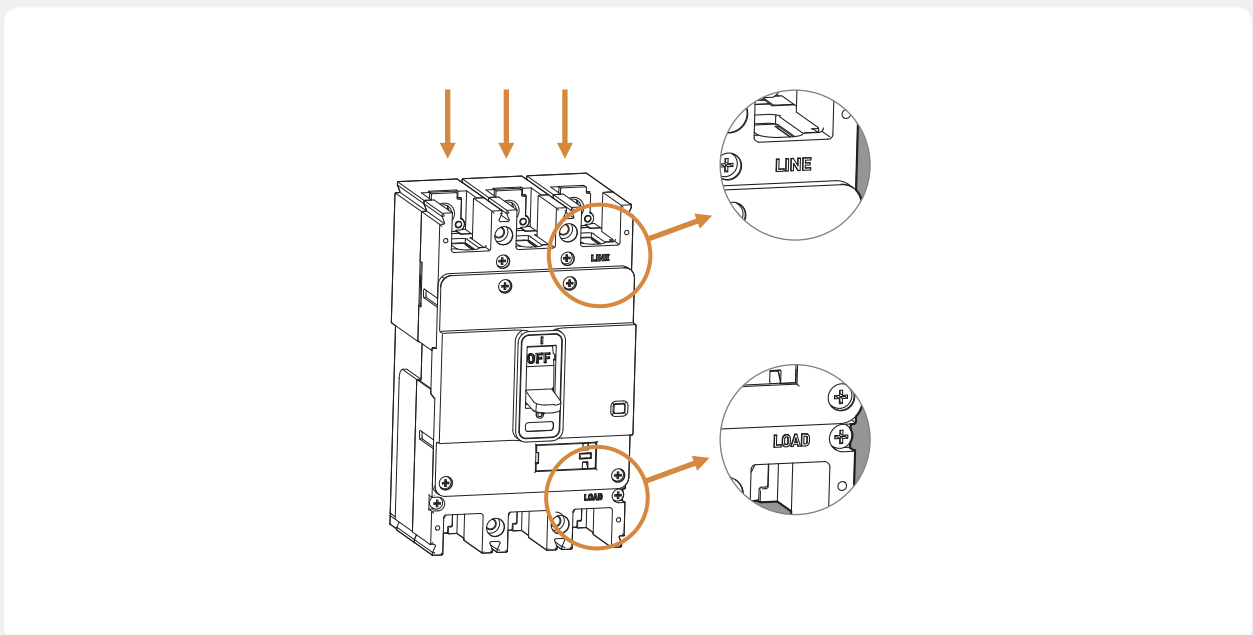






Technical Information

Standard Configuration

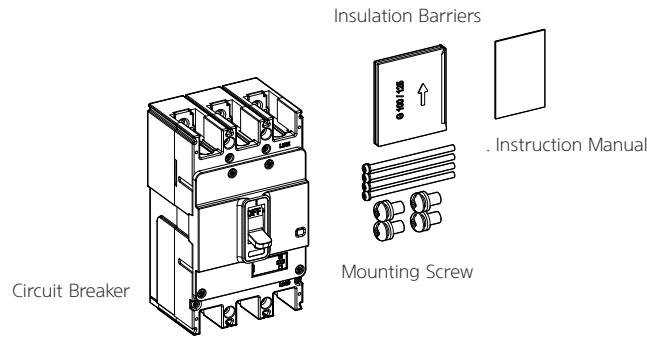
HGM/HGE Type





HGM/HGE100, 125, 250

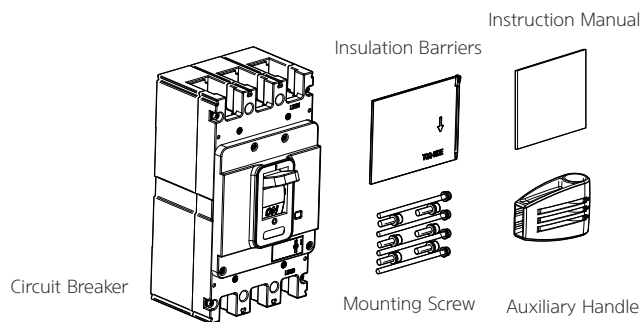

MCCB/ELCB	Part					
HGM/HGE100	2P	2 EA (M4 x L70)	4 EA	(M5 x L15) (15 - 50 A)	(M8 x L15) (60 - 100 A)	1 EA
	3P	4 EA (M4 x L70)	6 EA			2 EA
	4P	6 EA (M4 x L70)	8 EA			3 EA
HGM/HGE125	2P	2 EA (M4 x L70)	4 EA (M8 x L15)		1 EA	
	3P	4 EA (M4 x L70)	6 EA (M8 x L15)		2 EA	
	4P	6 EA (M4 x L70)	8 EA (M8 x L15)		3 EA	
HGM/HGE250	2P	4 EA (M4 x L70)	4 EA (Hex socket M8 x L15)		1 EA	
	3P	4 EA (M4 x L70)	6 EA (Hex socket M8 x L15)		2 EA	
	4P	6 EA (M4 x L70)	8 EA (Hex socket M8 x L15)		3 EA	


HGM/HGE400, 800



MCCB	Part				
HGM/HGE400	2P	4 EA (M5 x L98)	4 EA (M10 x L23)	1 EA	1 EA
	3P	4 EA (M5 x L98)	6 EA (M10 x L23)	2 EA	1 EA
	4P	6 EA (M5 x L98)	8 EA (M10 x L23)	3 EA	1 EA
HGM/HGE630/800	2P	4 EA (M6 x L103)	4 EA (M12 x L30)	1 EA	1 EA
	3P	4 EA (M6 x L103)	6 EA (M12 x L30)	2 EA	1 EA
	4P	6 EA (M6 x L103)	8 EA (M12 x L30)	3 EA	1 EA

MCCB/ELCB Assembly and Terminal Mounting Specification

HGM/HGE Type

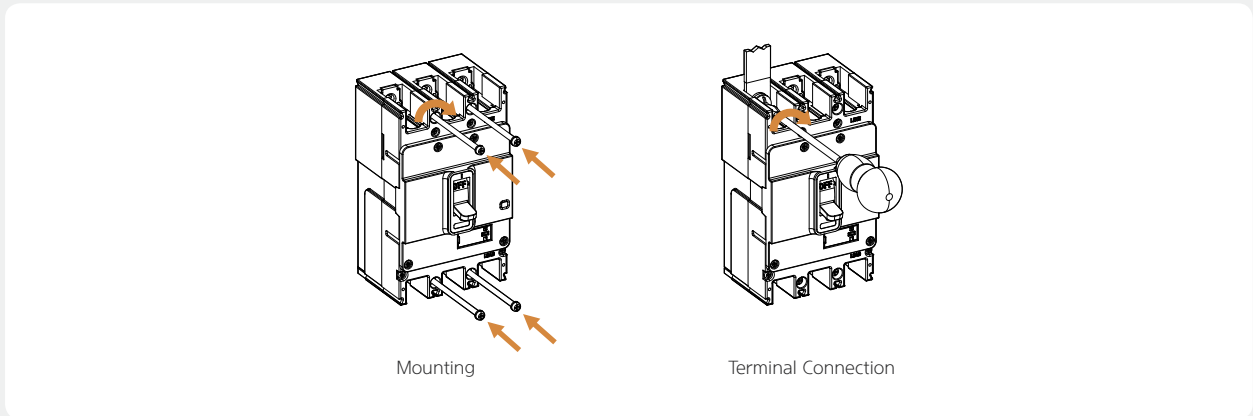

No	MCCB Type	Panel Mounting		Connection Terminal		
		Screw	Terminal (mm)	Screw	Connection Bus	Mounting Torque
1	HGM100	M4: 13 kgf.cm				M5: 28.5 kgf.cm M8: 110 kgf.cm
2	HGM125	M4: 13 kgf.cm				M8: 110 kgf.cm
3	HGM250	M4: 13 kgf.cm				Hex M8: 110 kgf.cm
4	HGM400	M5: 28.5 kgf.cm				Hex M10: 270 kgf.cm
5	HGM800	M6: 45 kgf.cm				Hex M12: 470 kgf.cm

Characteristic Curves & Dimensions

Characteristic Curves

Operation Characteristic Curve	70
Current & Energy-Limiting Characteristic Curve	75



Dimensions

Front Connection Type	76
Rear Connection Type	86
Plug-In Type	91
Rotary Handle	102
Mechanical Interlock	107
Terminal Cover	112
Motor Operator	115
Lug Terminal	117
DIN Rail Adaptor	119

Operation Characteristic Curve



HGM/HGE100 (16 - 32 A)

• HGM/HGE30

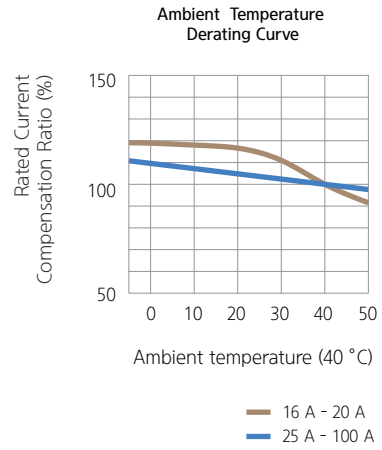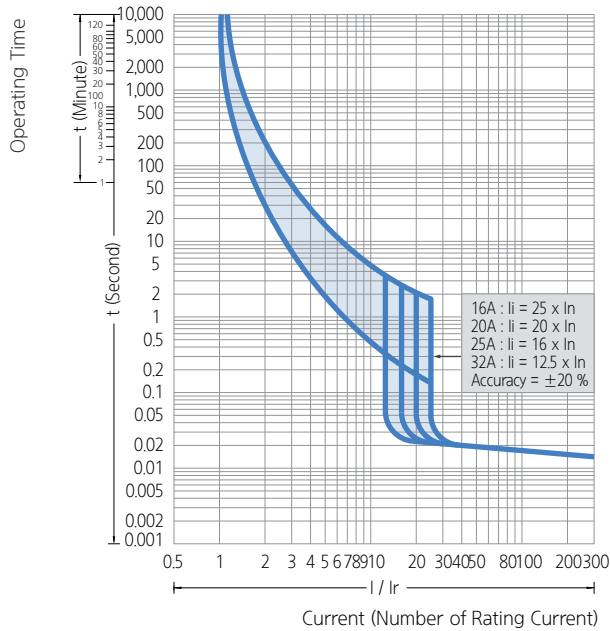


HGM/HGE100 (40 - 100 A)

• HGM/HGE50E/S, 60, 100

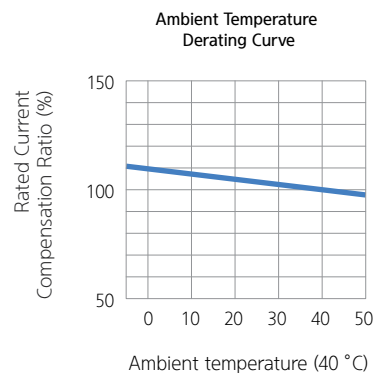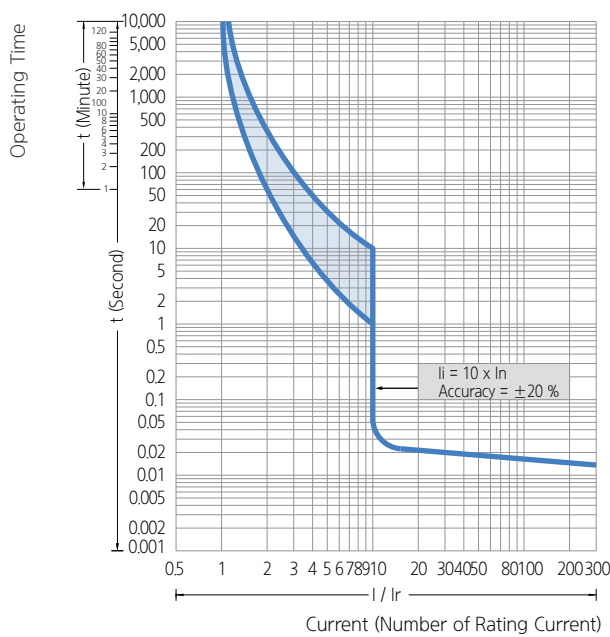


HGM/HGE125 (16 - 32 A)

• HGM/HGE50H/L

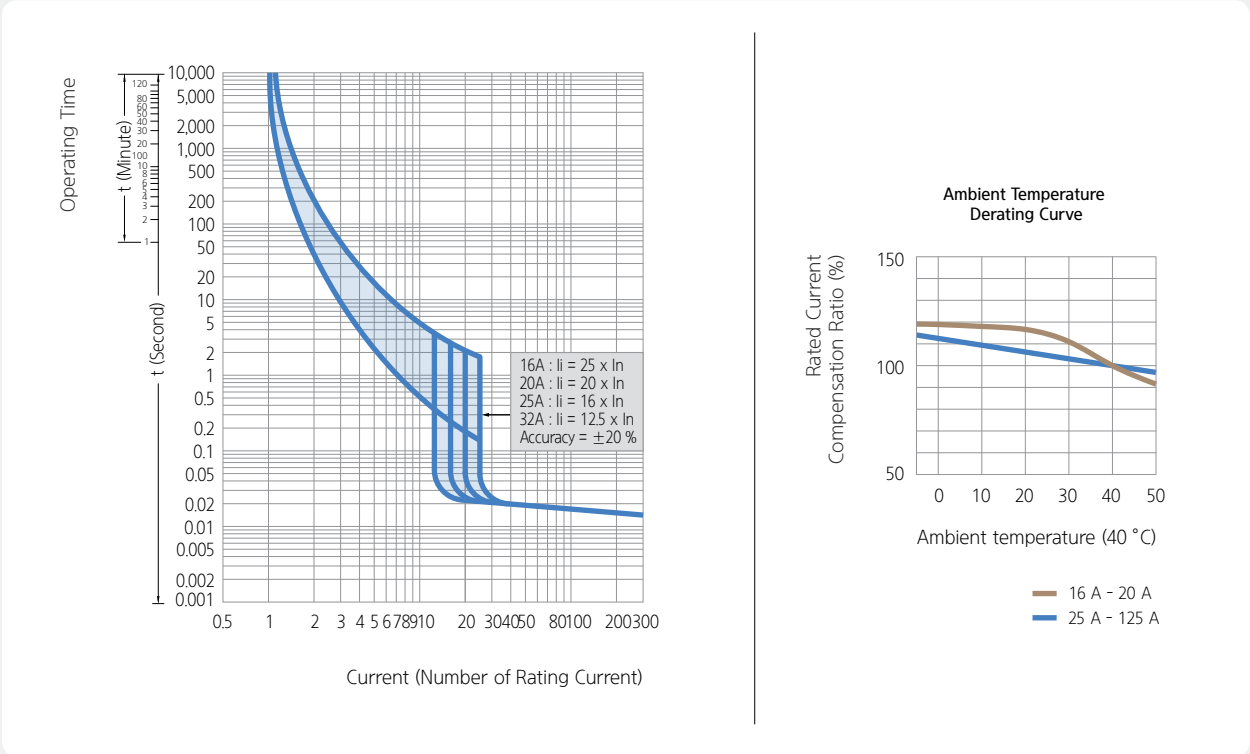

HGM/HGE125 (40 - 125 A)



• HGM/HGE50H/L, 125

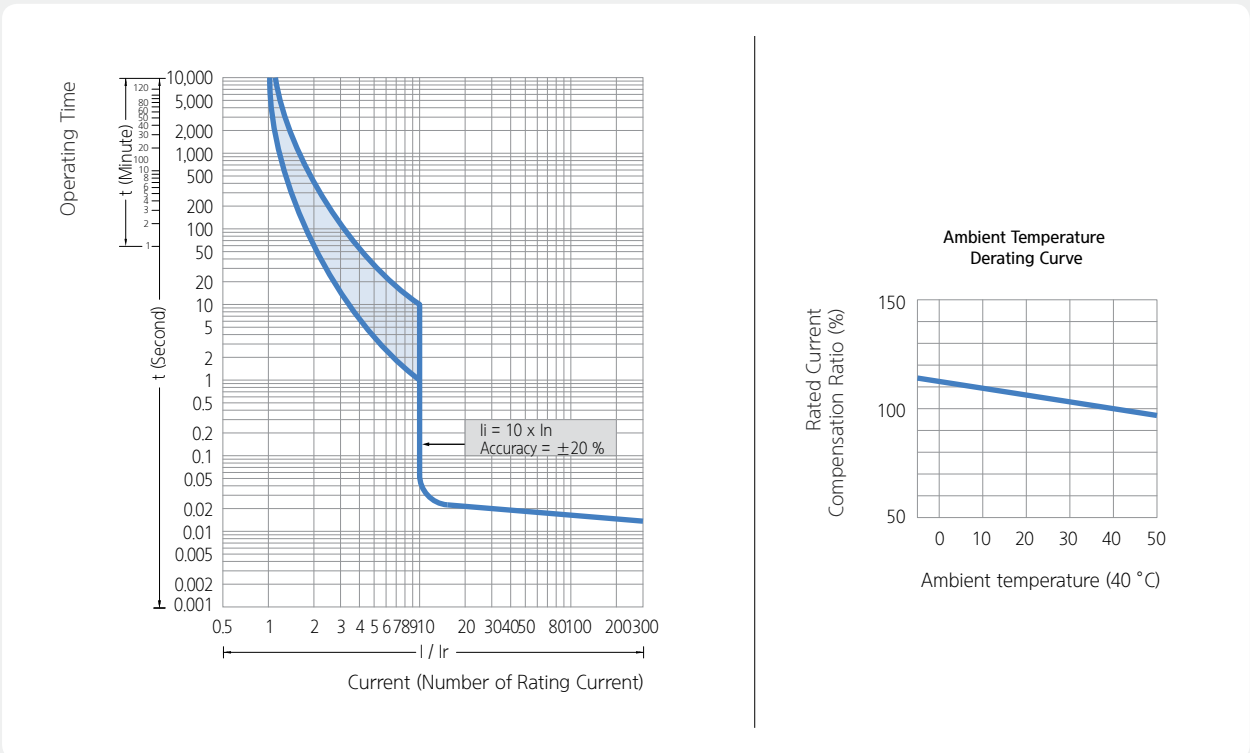

Operation Characteristic Curve



HGM/HGE250 (100 - 250 A)

• HGM/HGE250

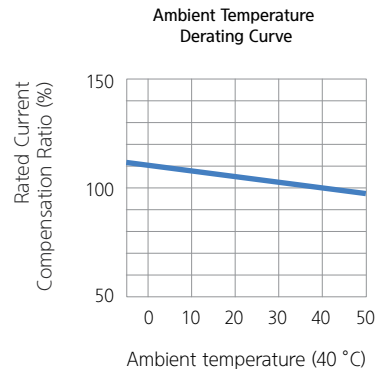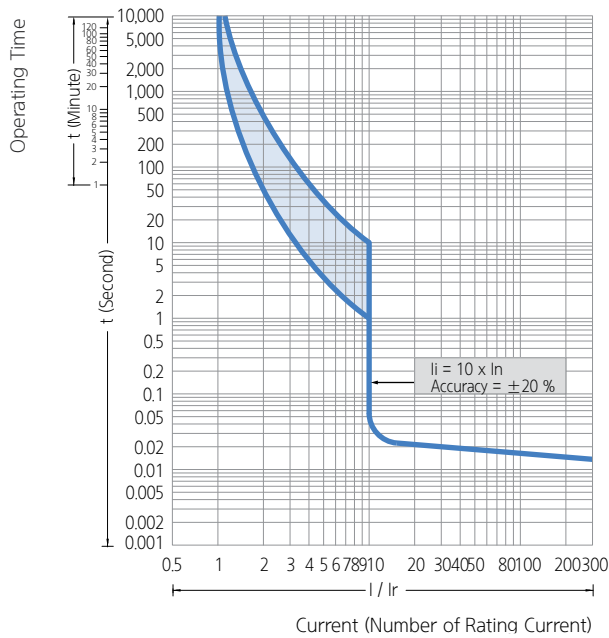


HGM400

• HGM400

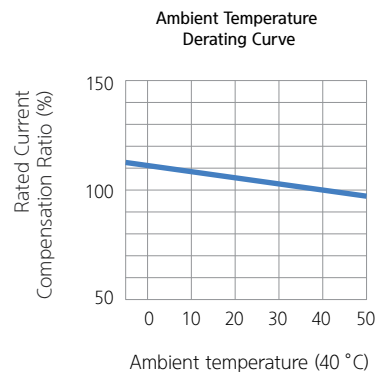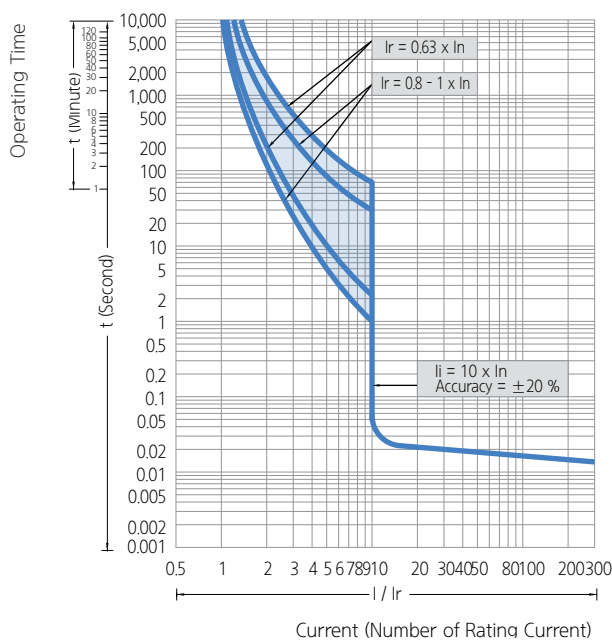


HGM800 (630 - 800 A)

• HGM630, 800

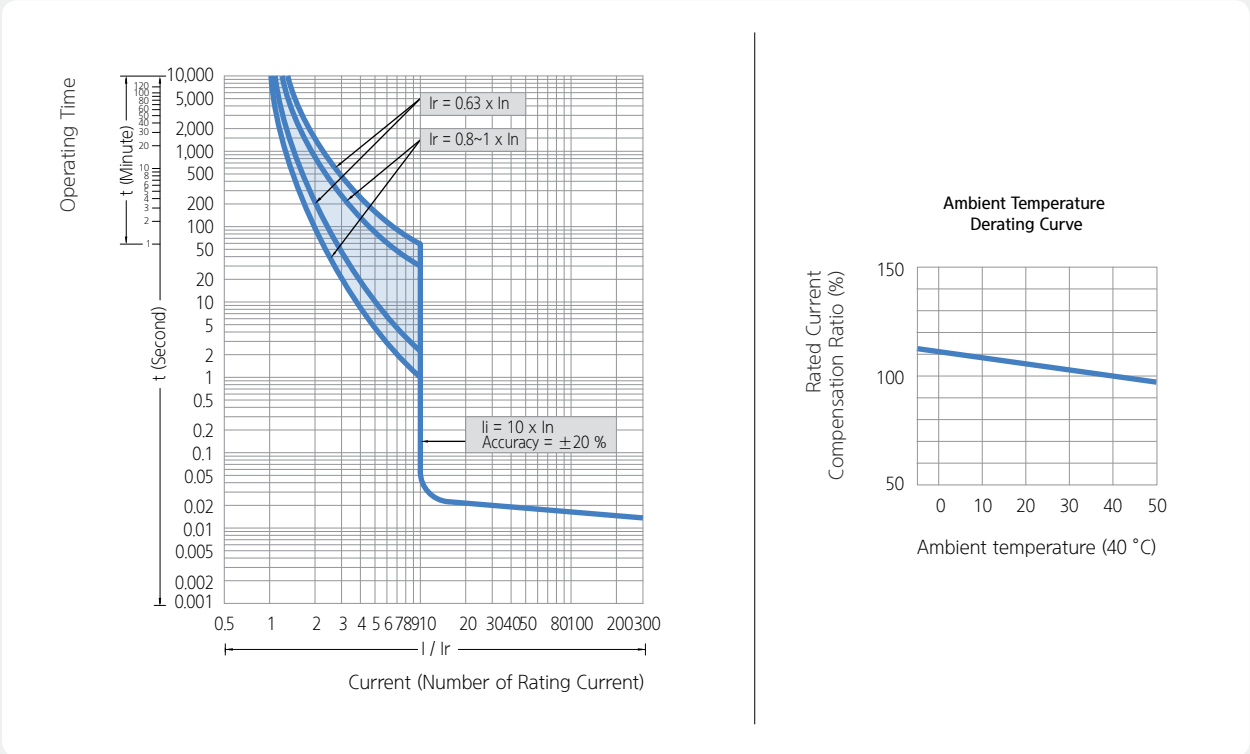

HGE400



• HGE400

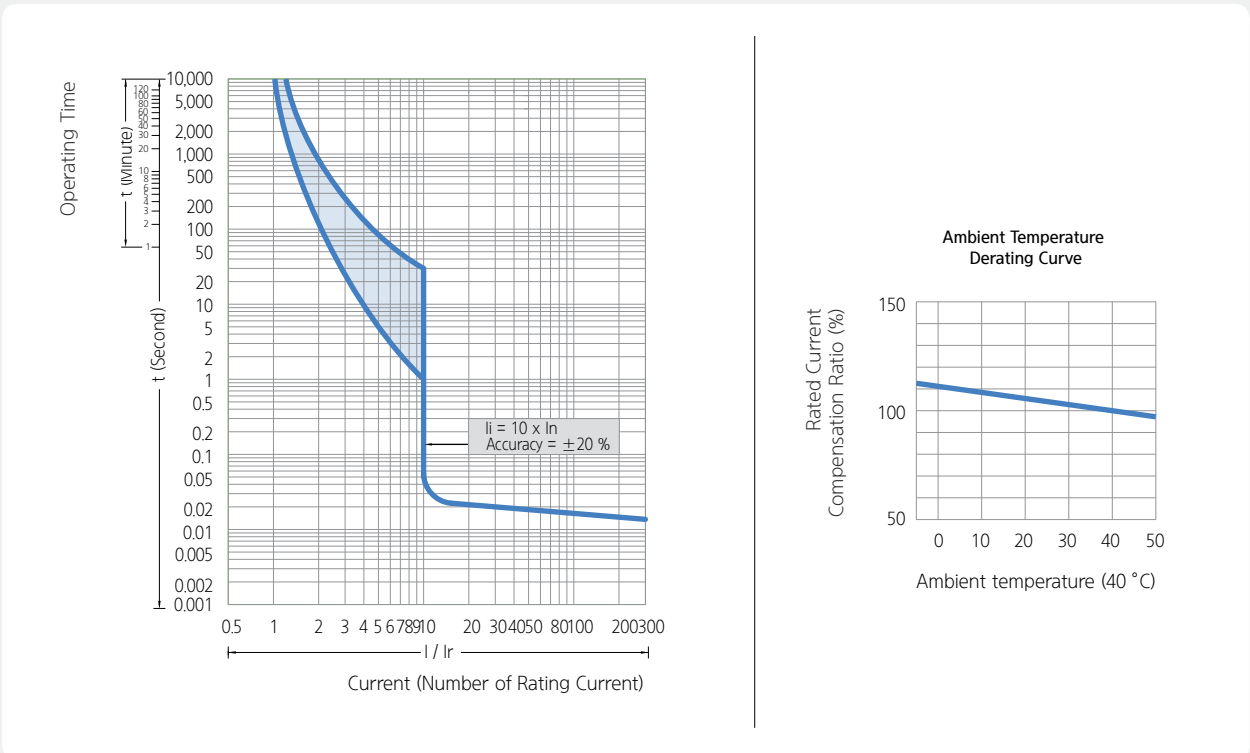

Operation Characteristic Curve

HGE800 (630 - 800A)


• HGE630, 800

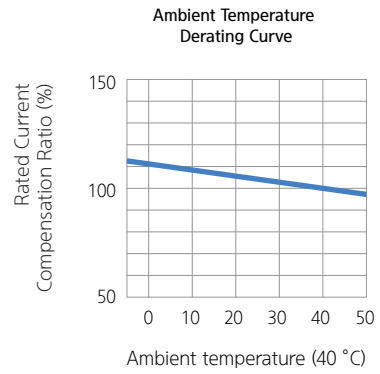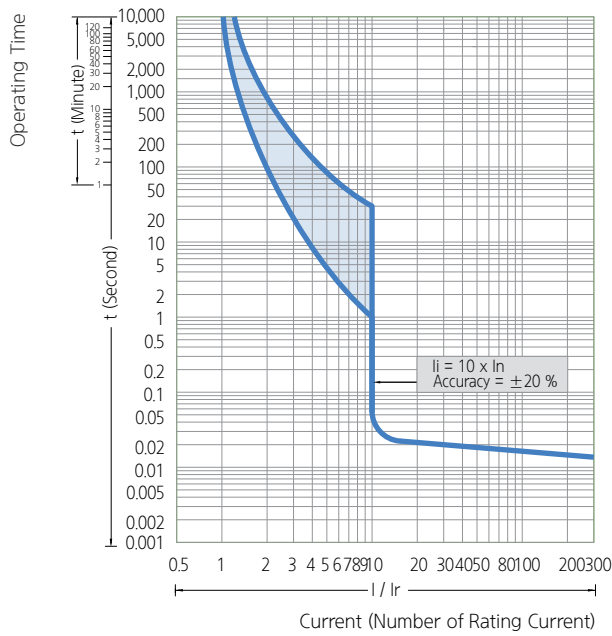

Current & Energy-Limiting Characteristic Curve


Current-Limiting Characteristic Curve

400/460V

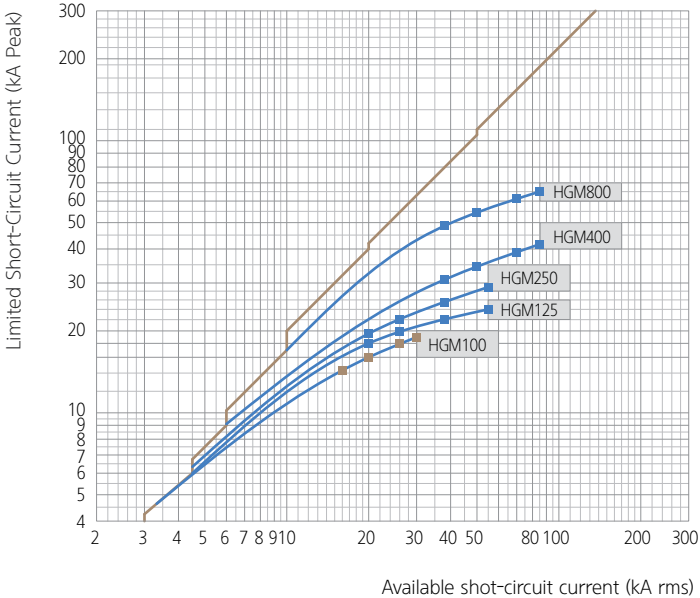

Energy-Limiting Characteristic Curve

400/460V

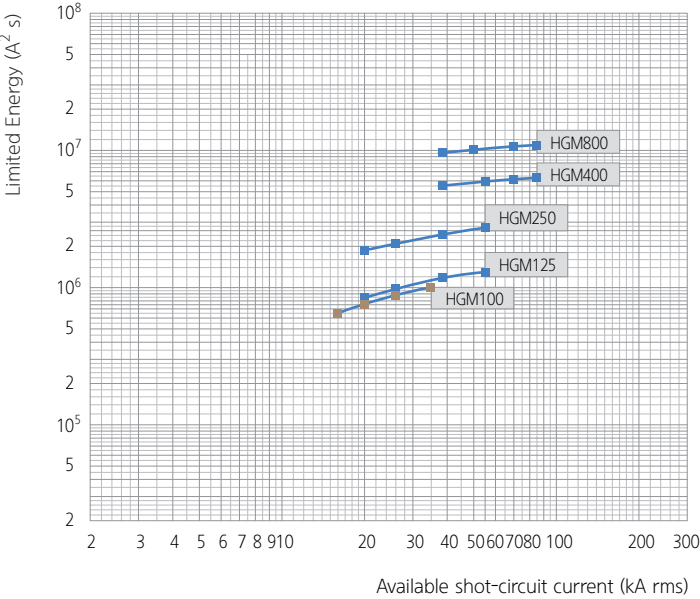


Dimensions

Front Connection Type HGM100


• HGM30, 50E/S, 60, 100

Dimensions

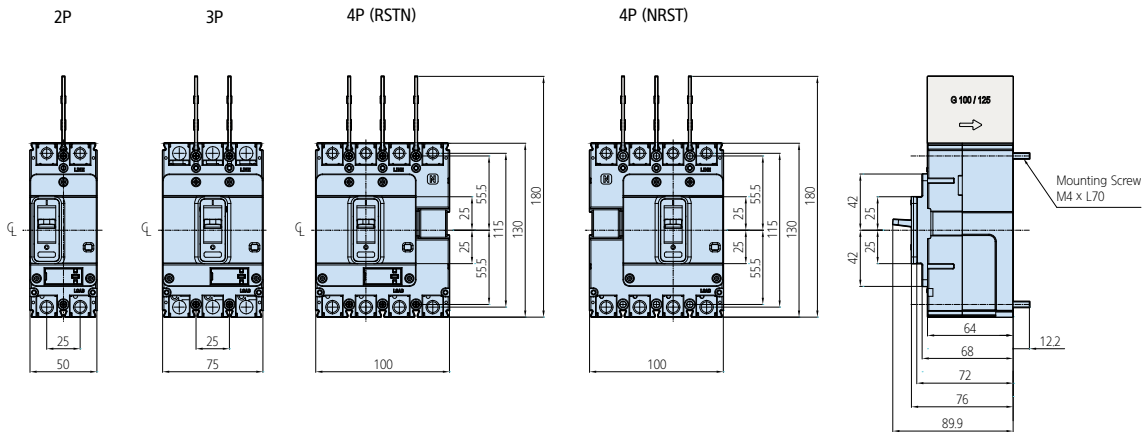


※ Insulation barriers for line side are provided as basic option.

Panel Cut Dimensions for Body

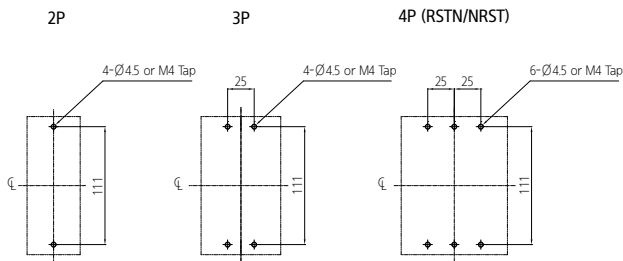


Terminal/Connection Bus Dimension

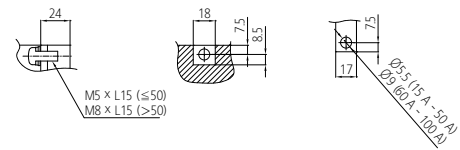


100AF

Specification of Mounting Screw: M4 x L70 P/W
 Specification of Terminal Screw: (Less than 50 A) M5 x L15 P/W P/W
 (Excess than 50 A) M8 x L15 S/W P/W


Panel Cut Dimensions for Handle

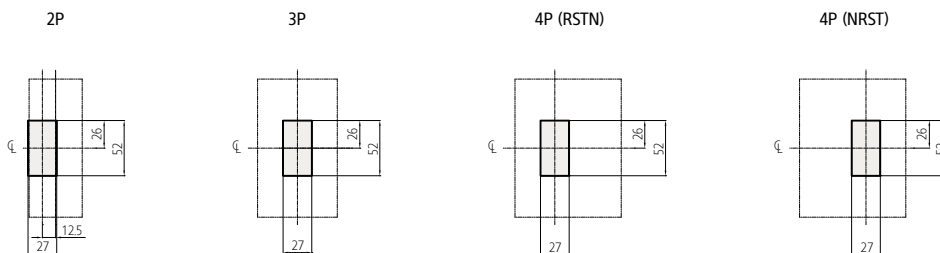

Panel Cut Dimensions for Handle/Test Button

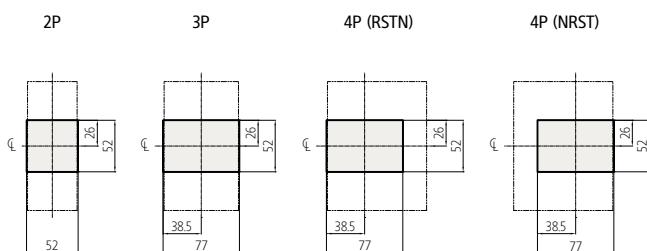


Panel Cut Dimensions for Handle/Trip Unit

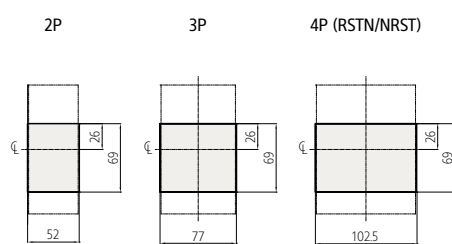

Front Connection Type HGM125


• HGM50H/L, 125

Dimensions

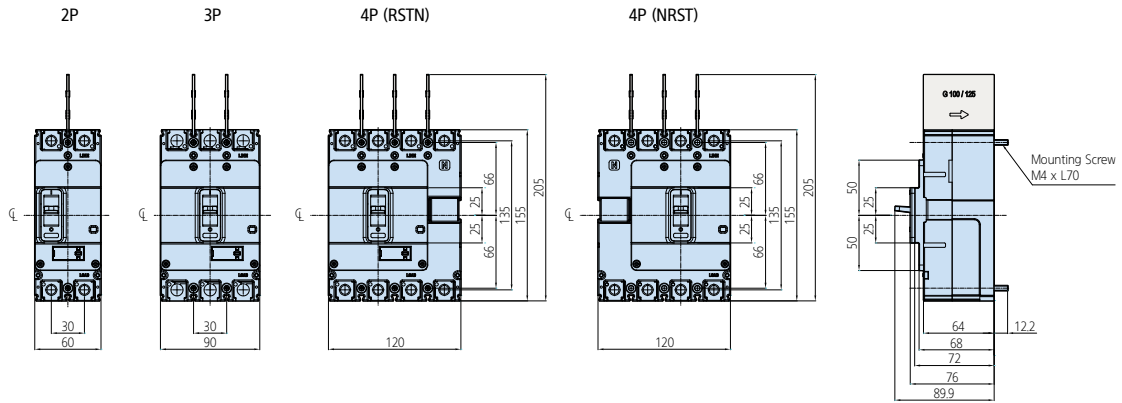


※ Insulation barriers for line side are provided as basic option.

Panel Cut Dimensions for Body

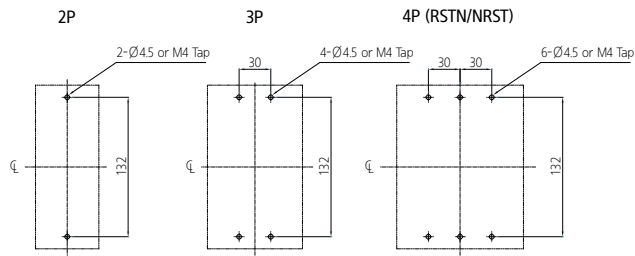


Terminal/Connection Bus Dimension

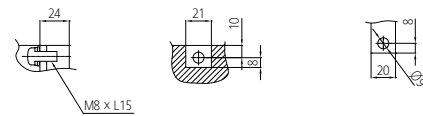


125AF
 Specification of Mounting Screw: M4 x L70 P/W
 Specification of Terminal Screw: M8 x L15 S/W P/W


Panel Cut Dimensions for Handle

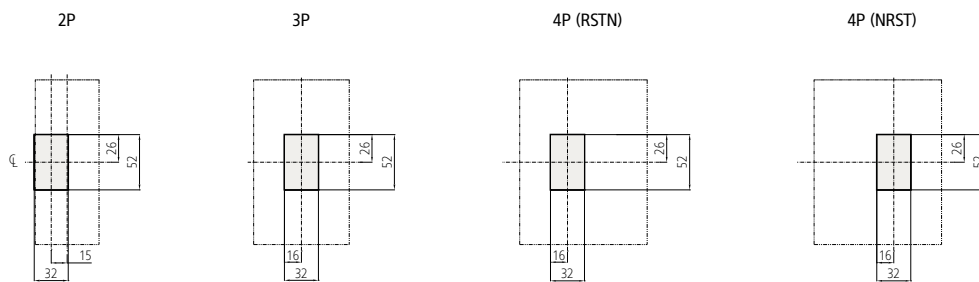

Panel Cut Dimensions for Handle/Test Button

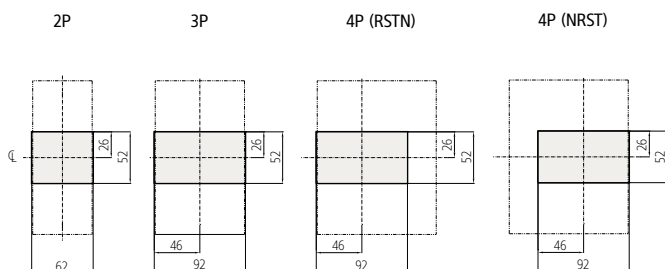

Panel Cut Dimensions for Handle/Trip Unit

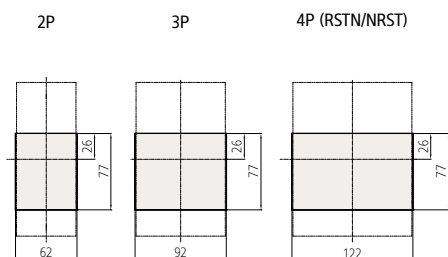


Dimensions

Front Connection Type HGM250


• HGM160, 250

Dimensions

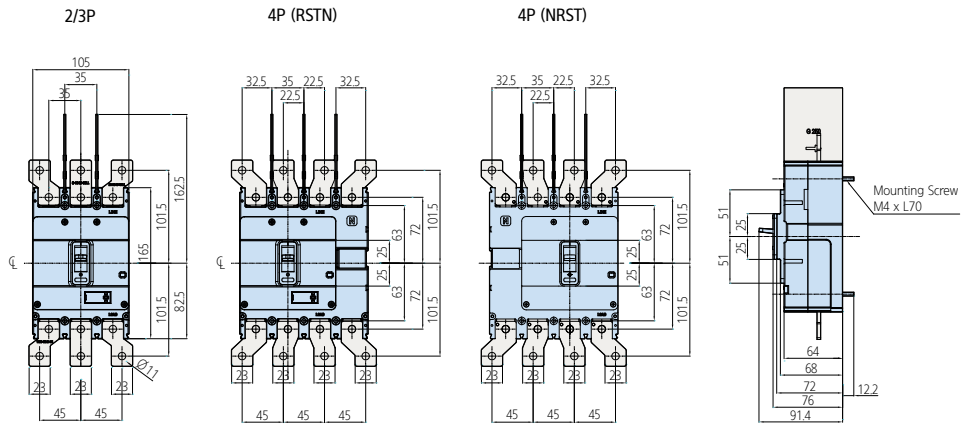


※ Insulation barriers for line side are provided as basic option.

Panel Cut Dimensions for Body

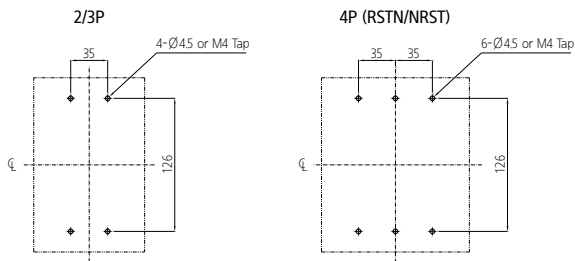


Terminal/Connection Bus Dimension

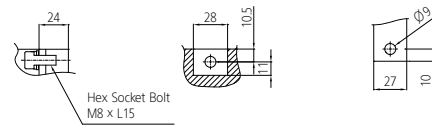


250AF

Specification of Mounting Screw: M4 x L70 P/W
Specification of Terminal Screw: Hex Socket Bolt M8 x L15 S/W P/W


Panel Cut Dimensions for Handle

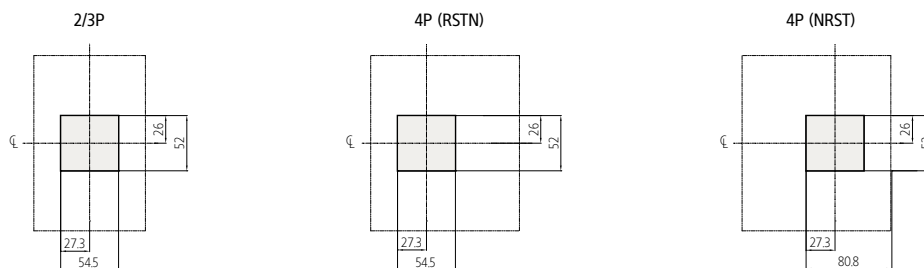

Panel Cut Dimensions for Handle/Test Button

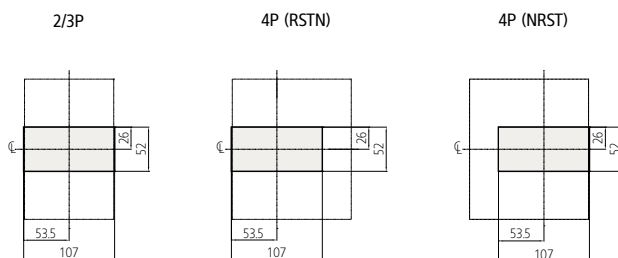


Panel Cut Dimensions for Handle/Trip Unit

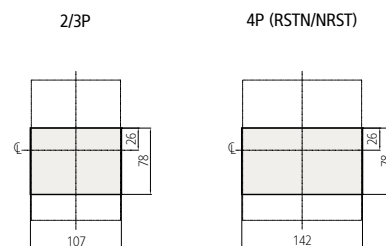

Front Connection Type HGM400


• HGM400

Dimensions

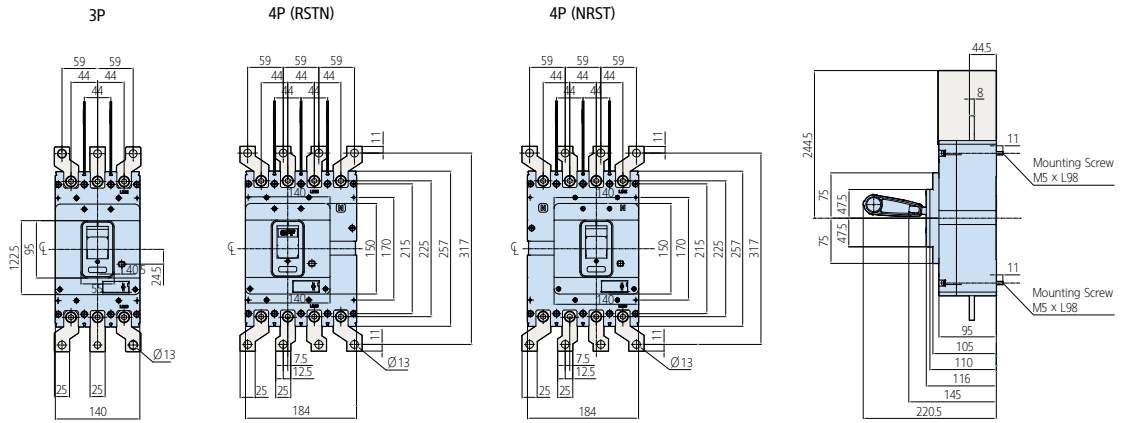


※ Insulation barriers for line side are provided as basic option.


Panel Cut Dimensions for Body

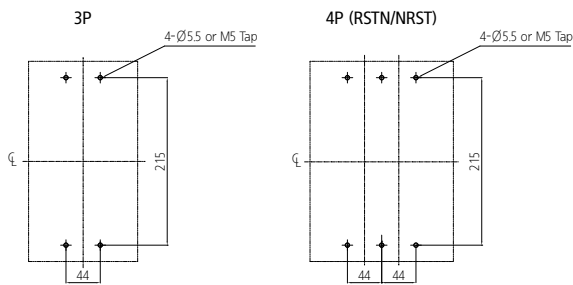


Terminal/Connection Bus Dimension

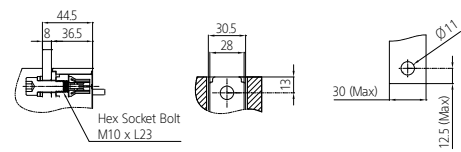


Panel Cut Dimensions for Handle

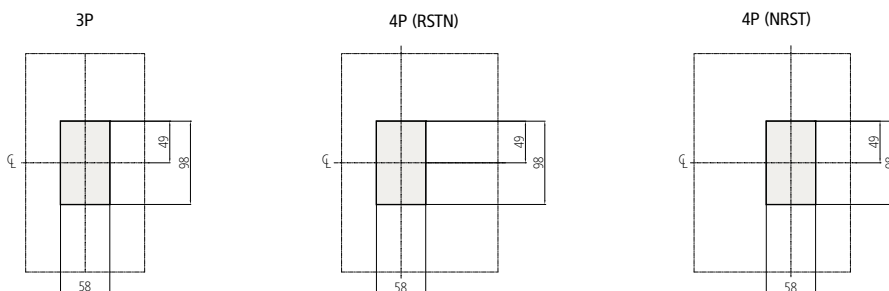

Panel Cut Dimensions for Handle/Test Button

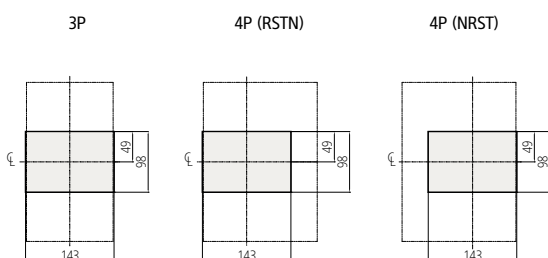

Panel Cut Dimensions for Handle/Trip Unit

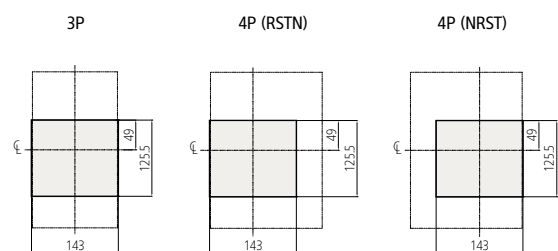


Dimensions


Front Connection Type HGM800

• HGM630, 800


Dimensions

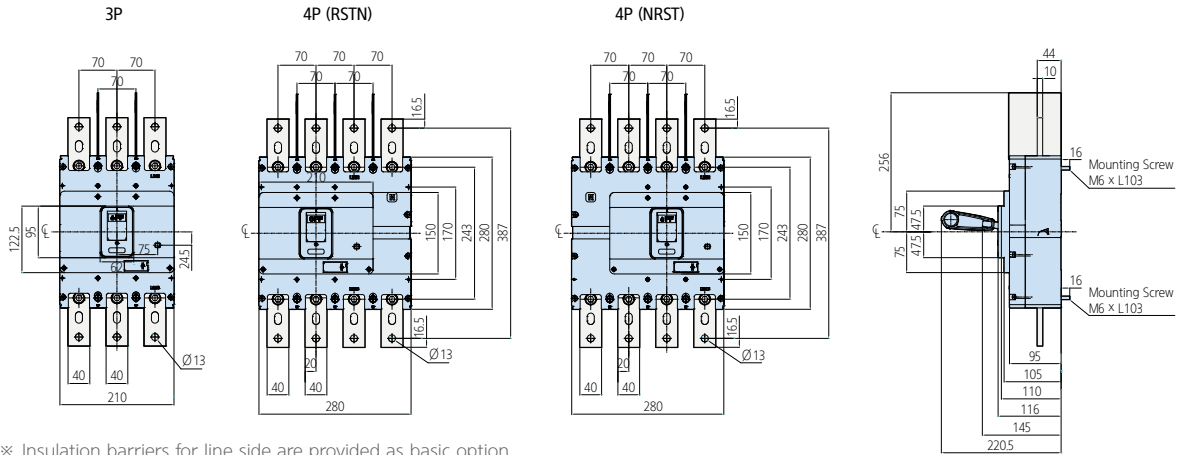


Panel Cut Dimensions for Body

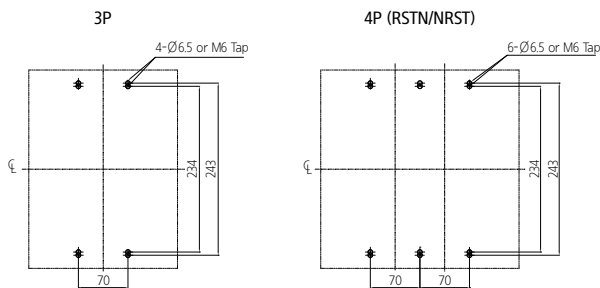


Terminal/Connection Bus Dimension

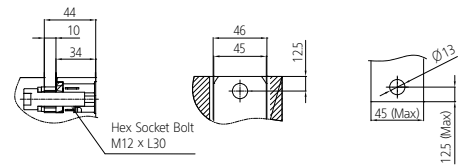


Panel Cut Dimensions for Handle

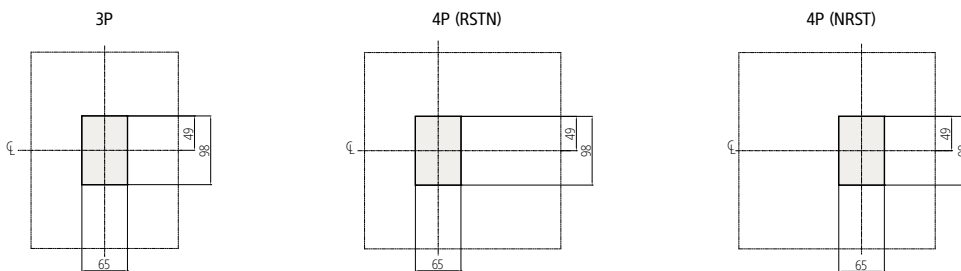

Panel Cut Dimensions for Handle/Test Button

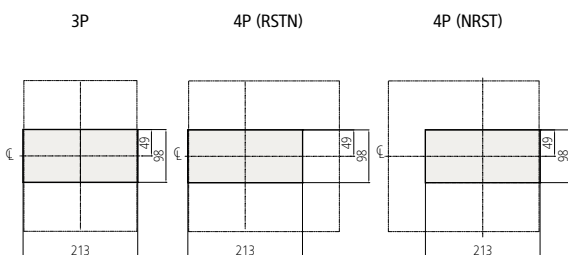


Panel Cut Dimensions for Handle/Trip Unit

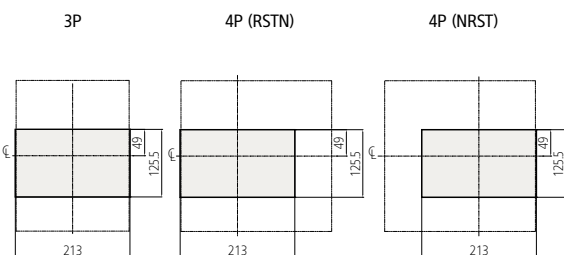

Front Connection Type HGE100


• HGE30, 50E/S, 60, 100

Dimensions

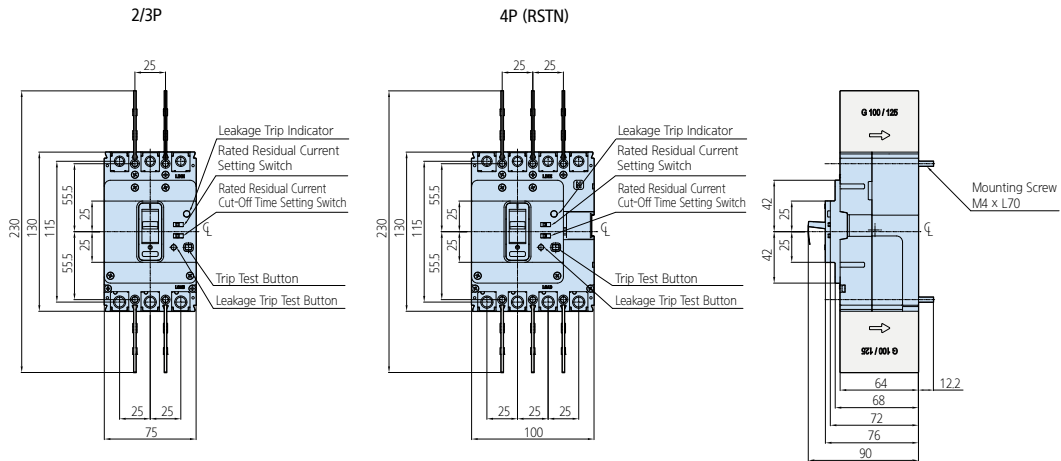


※ Insulation barriers for line side are provided as basic option

Panel Cut Dimensions for Body

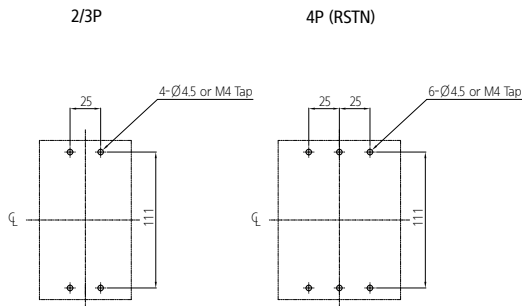


Terminal/Connection Bus Dimension

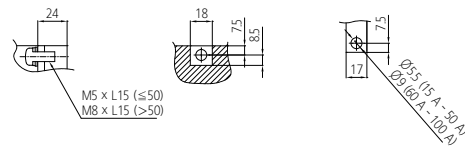


100AF

Specification of Mounting Screw: M4 x L70 P/W
Specification of Terminal Screw: (Less than 50 A) M5 x L15 P/W P/W
(Excess than 50 A) M8 x L15 S/W P/W

Panel Cut Dimensions for Handle

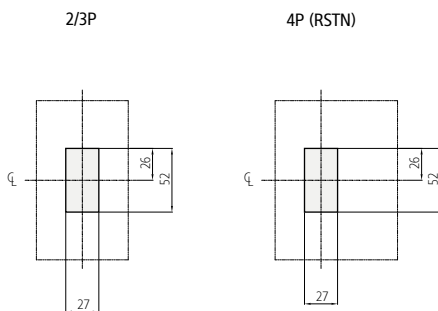

Panel Cut Dimensions for Handle/Trip Unit

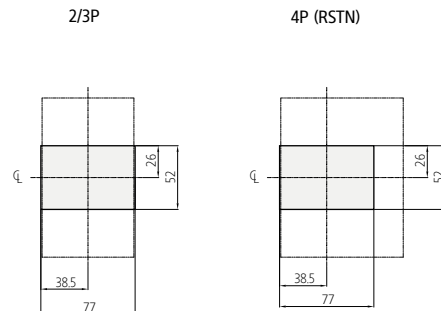


Dimensions


Front Connection Type HGE125

• HGE50H/L, 125


Dimensions

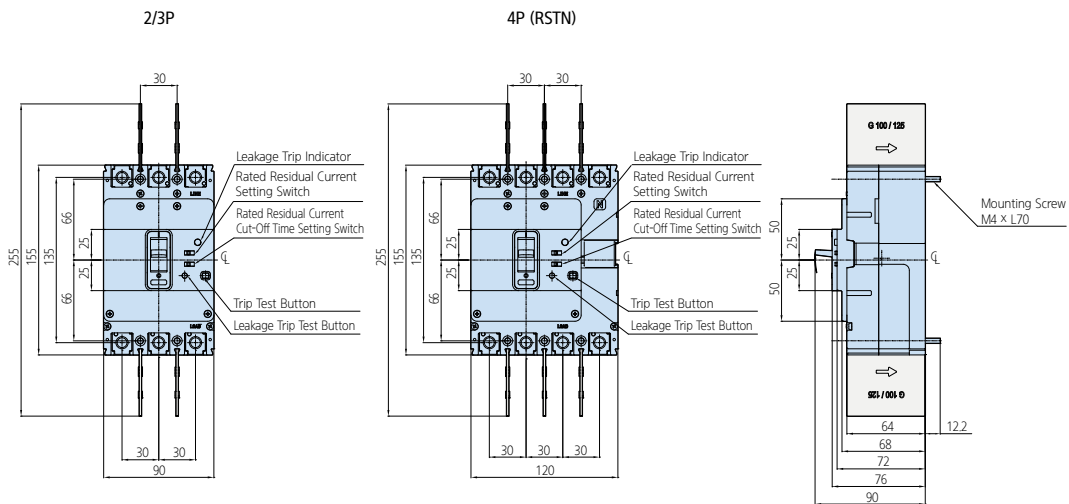

Panel Cut Dimensions for Body

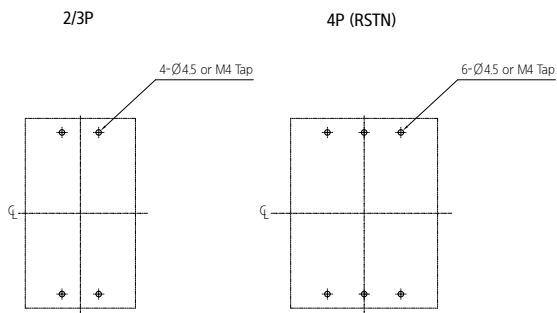


Terminal/Connection Bus Dimension

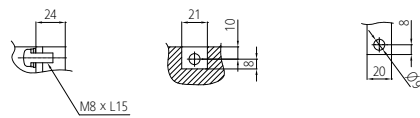


125AF

Specification of Mounting Screw: M4 x L70 P/W
Specification of Terminal Screw: M8 x L15 S/W P/W

Panel Cut Dimensions for Handle

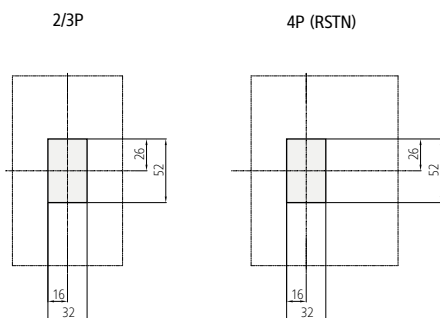


Panel Cut Dimensions for Handle/Test Button

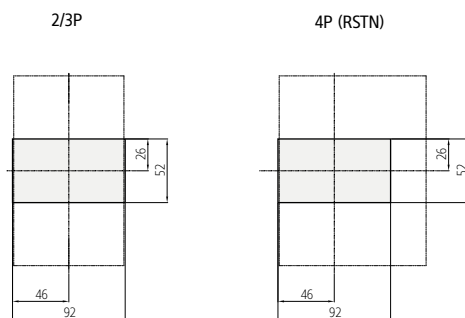

Front Connection Type HGE250


• HGE160, 250

Dimensions

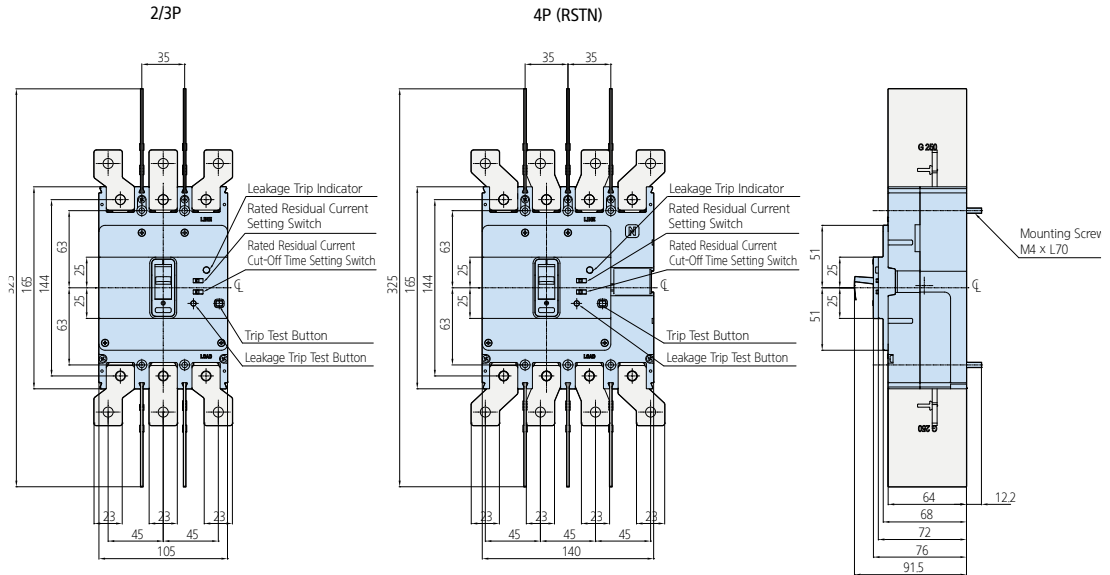


※ Insulation barriers for line side are provided as basic option.

Panel Cut Dimensions for Body

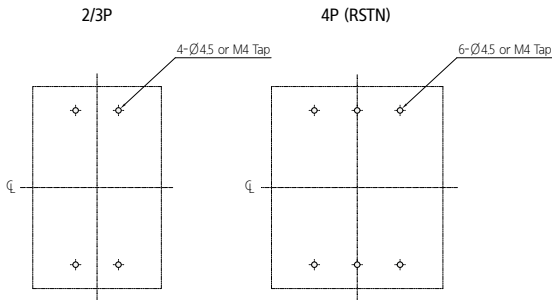

Terminal/Connection Bus Dimension

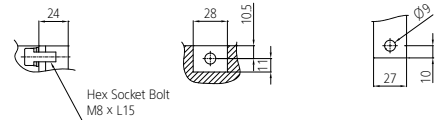


250AF


Specification of Mounting Screw: M4 x L70 P/W

Specification of Terminal Screw: Hex Socket Bolt M8 x L15 SW P/W

Panel Cut Dimensions for Handle

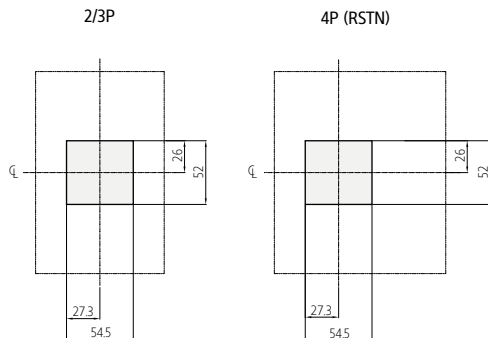

Panel Cut Dimensions for Handle/Test Button

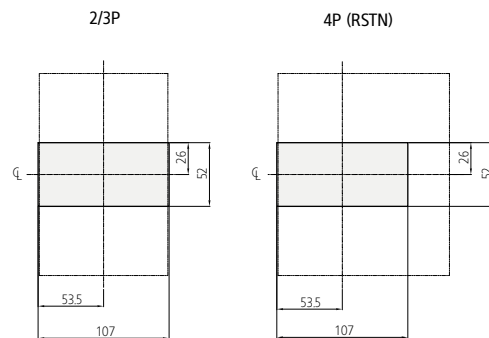


Dimensions

Front Connection Type HGE400


• HGE400

Dimension

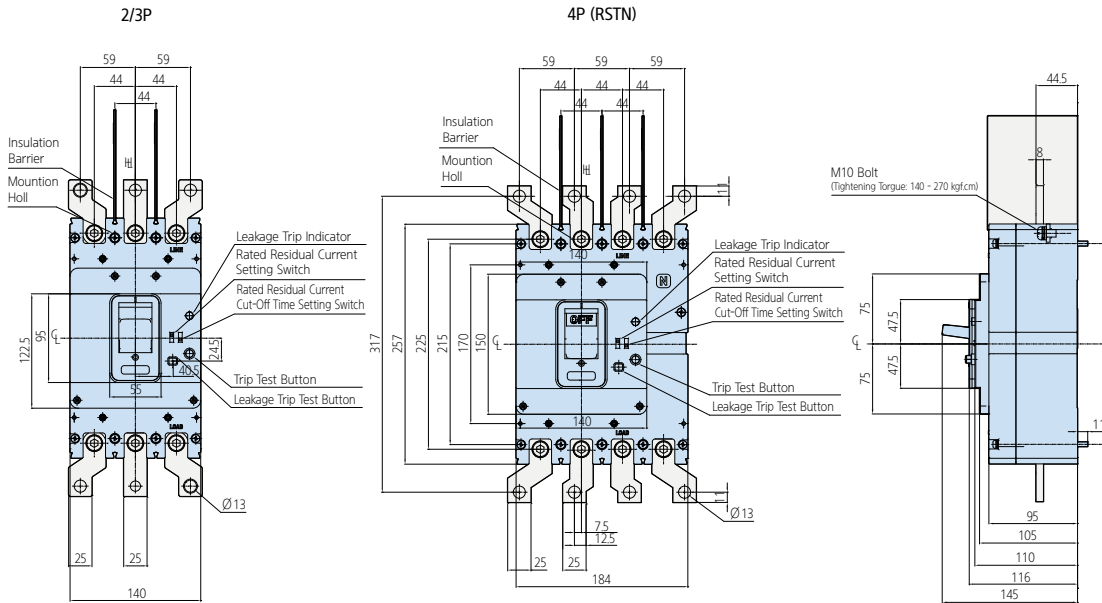


※ Insulation barriers for line side are provided as basic option.


Panel Cut Dimensions for Body

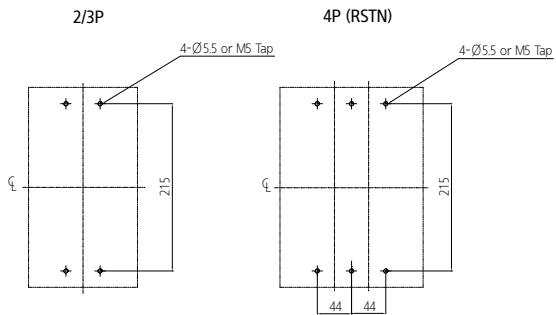

Terminal/Connection Bus Dimension

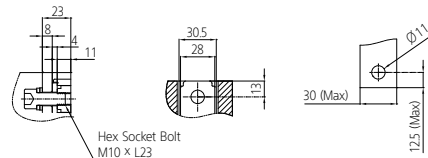


Panel Cut Dimensions

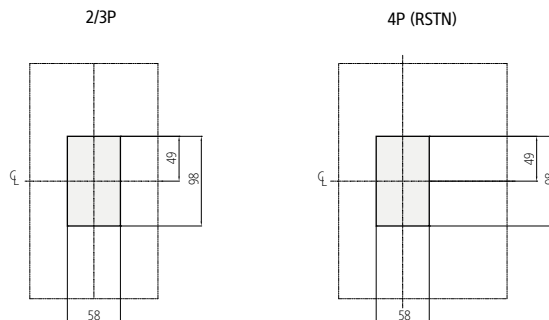

Front Connection Type HGE800


• HGE630, 800

Dimension

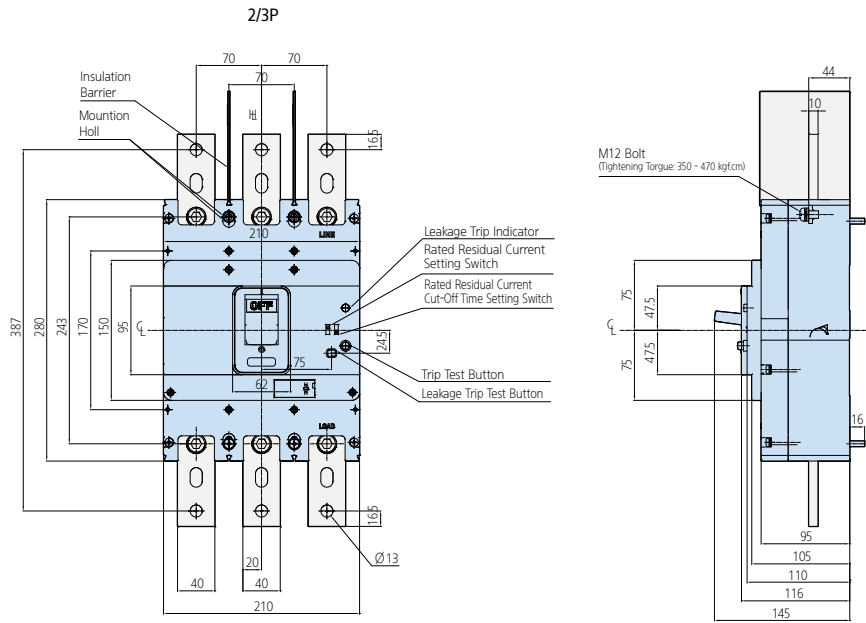


※ Insulation barriers for line side are provided as basic option.


Panel Cut Dimensions for Body

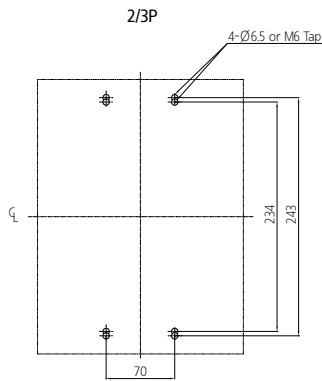

Terminal/Connection Bus Dimension

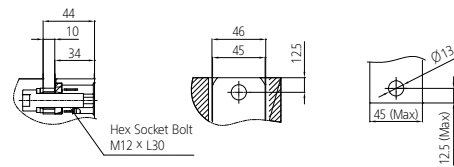

Panel Cut Dimensions

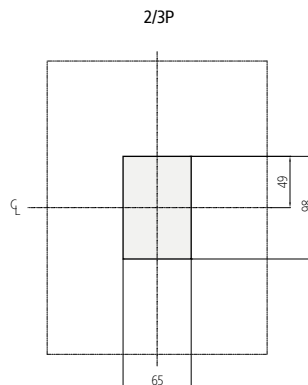


Dimensions


Rear Connection Type HGM100

• HGM30, 50E/S, 60, 100


Dimension

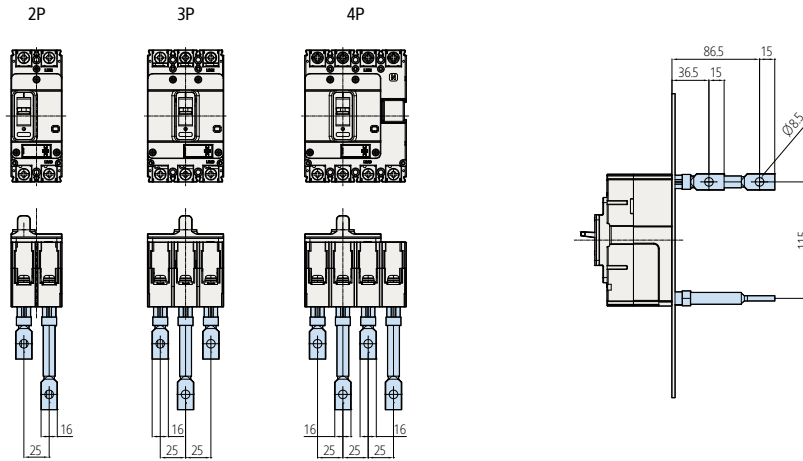


Panel Cut Dimensions for Body

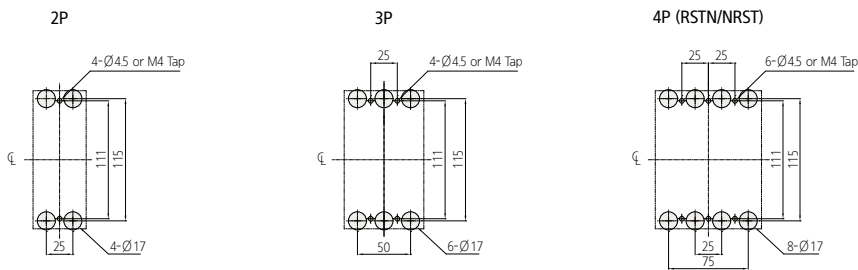

Panel Cut Dimensions for Handle/Test Button

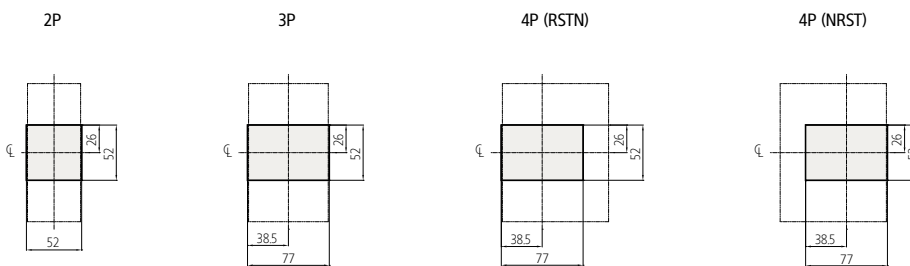


Panel Cut Dimensions for Handle/Trip Unit

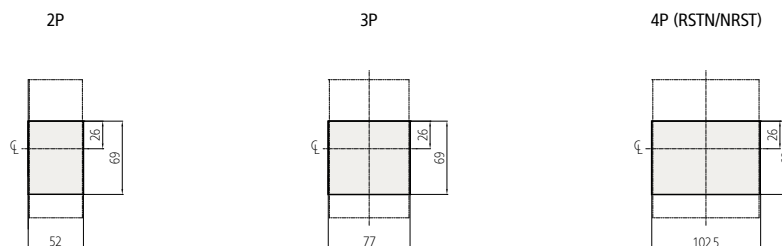


Rear Connection Type HGM125

• HGM50H/L, 125


Dimension

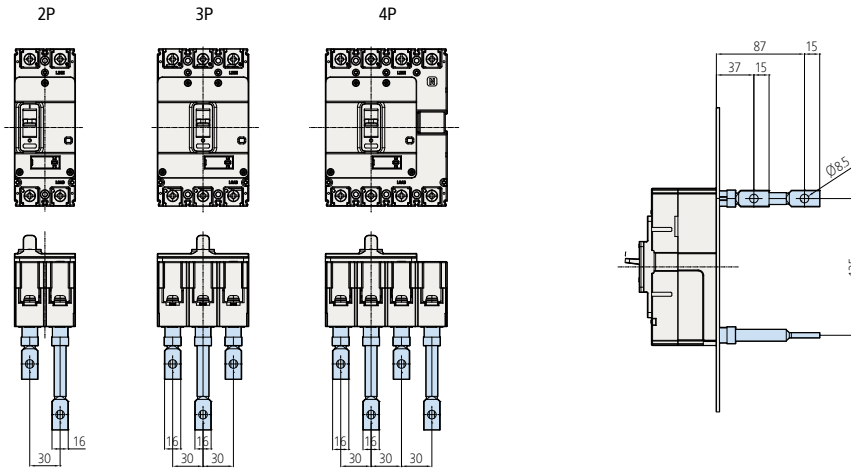


Panel Cut Dimensions for Body

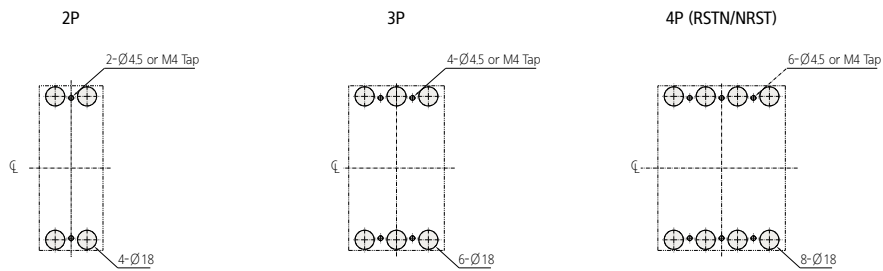

Panel Cut Dimensions for Handle/Test Button

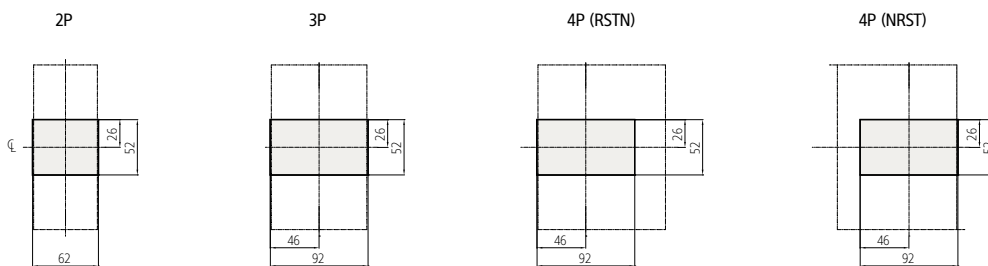

Panel Cut Dimensions for Handle/Trip Unit

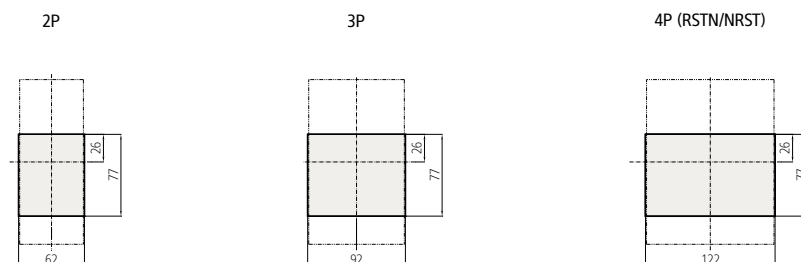


Dimensions


Rear Connection Type HGM250

• HGM160, 250


Dimension

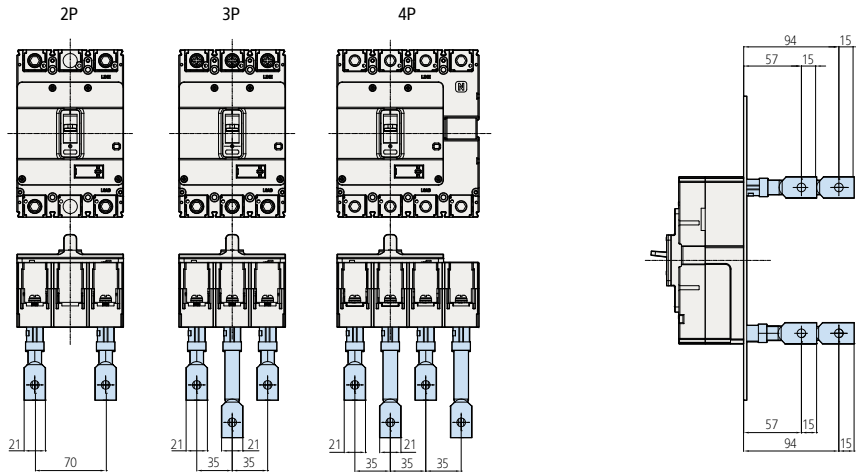


Panel Cut Dimensions for Body

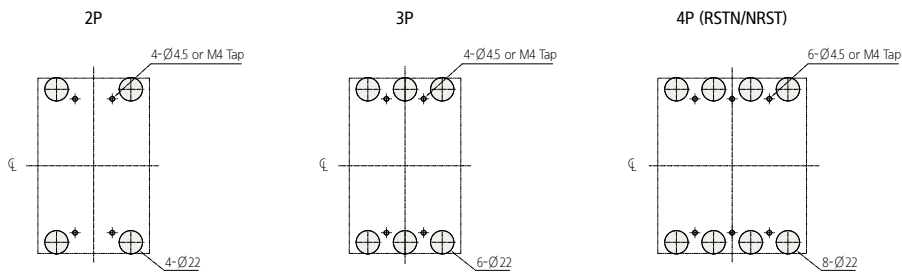

Panel Cut Dimensions for Handle/Test Button

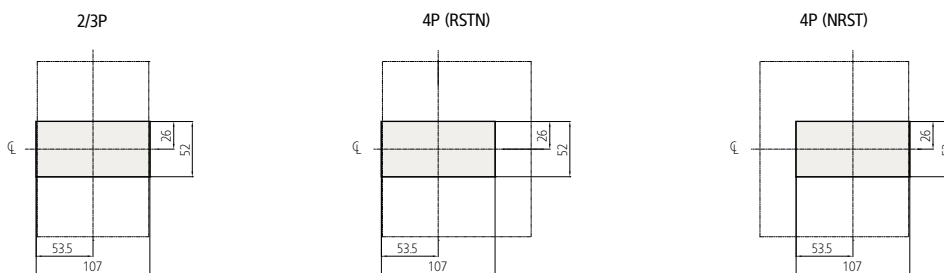


Panel Cut Dimensions for Handle/Trip Unit

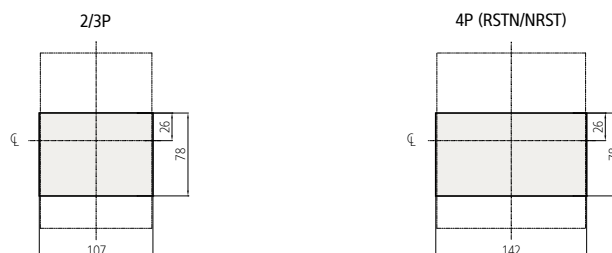


Rear Connection Type HGM400

• HGM400


Dimension

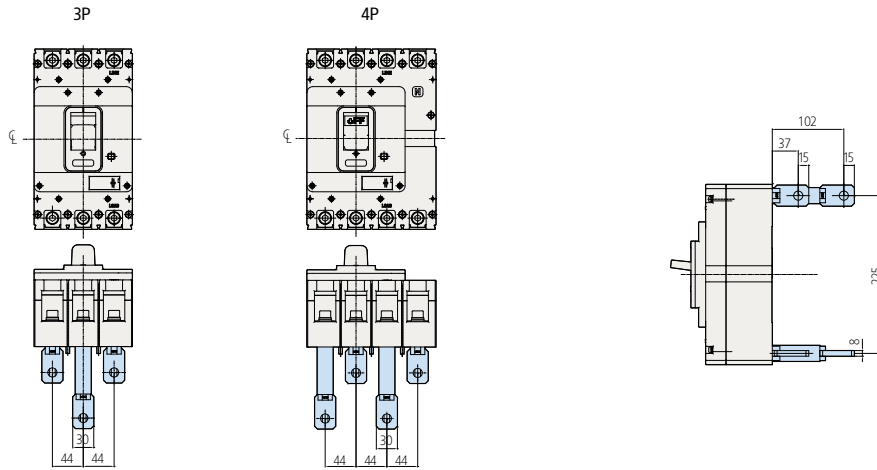




Panel Cut Dimensions for Body_{3P}

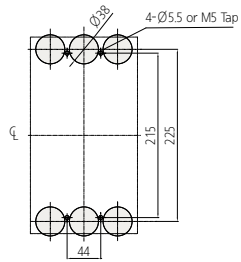




4P (RSTN/NRST)

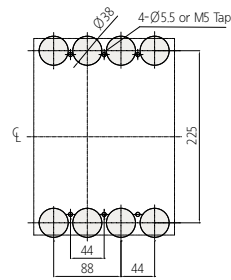

Panel Cut Dimensions for Handle/Test Button

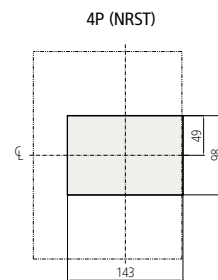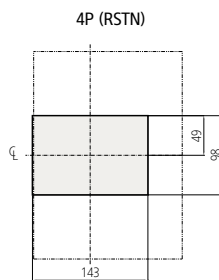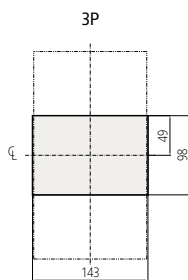

Panel Cut Dimensions for Handle/Trip Unit

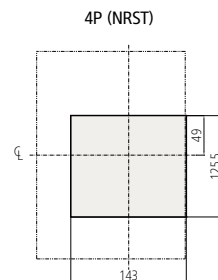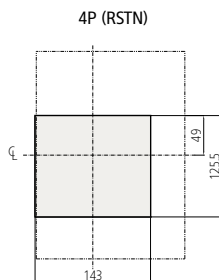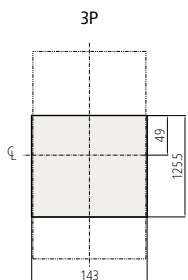


Dimensions


Rear Connection Type HGM800

• HGM630, 800


Dimension

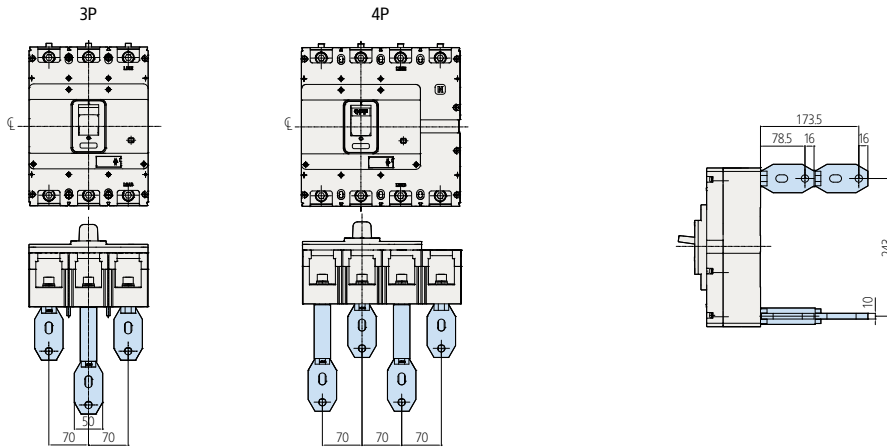


Panel Cut Dimensions for Body

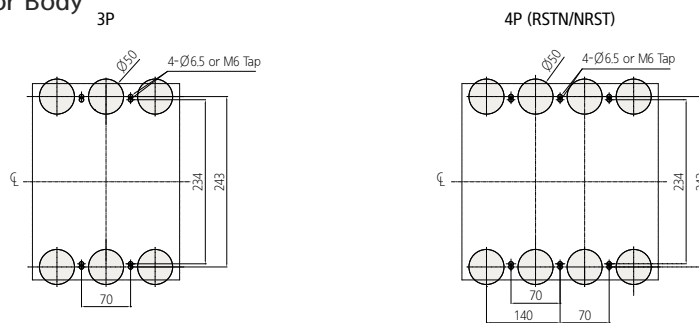

Panel Cut Dimensions for Handle/Test Button

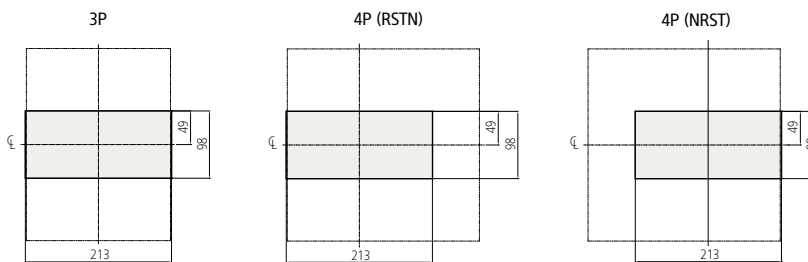


Panel Cut Dimensions for Handle/Trip Unit

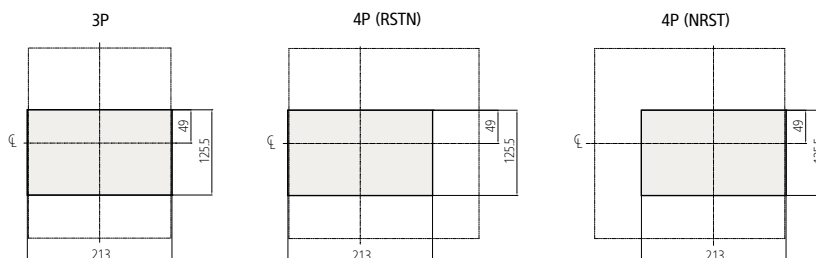


Plug-In Type HGM100

• HGM30, 50E/S, 60, 100

Dimension (TDM Type)

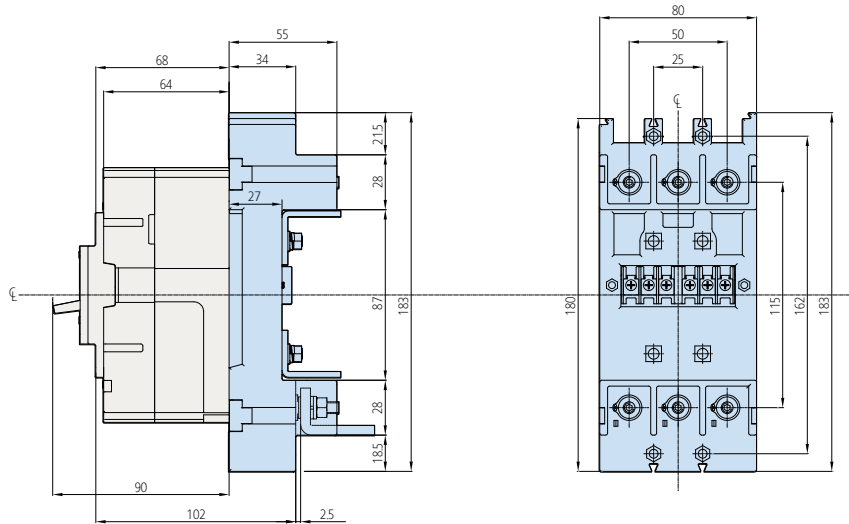

Dimensions for Panel Cutting and Mounting

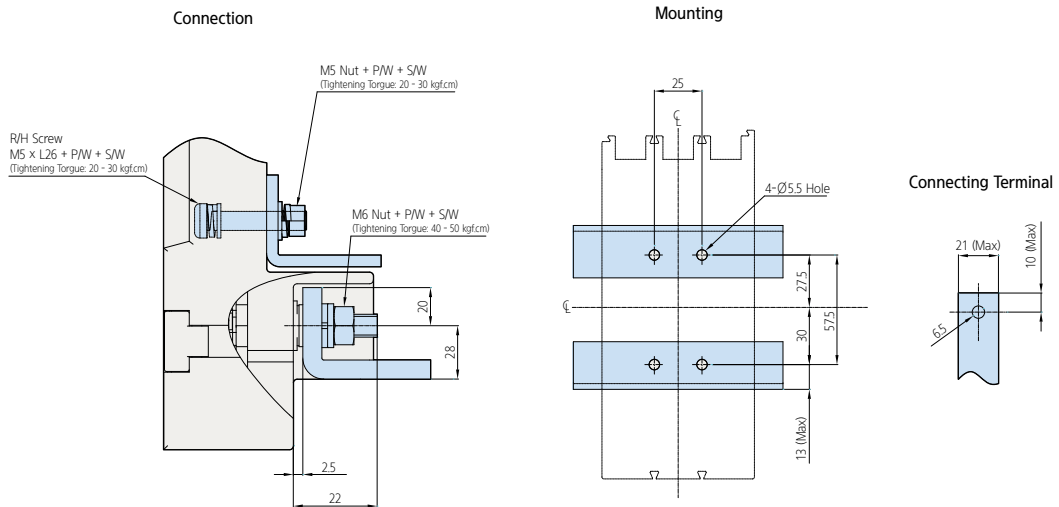


Dimensions


Plug-In Type HGM100

• HGM30, 50E/S, 60, 100

Dimension (TDA D Type)

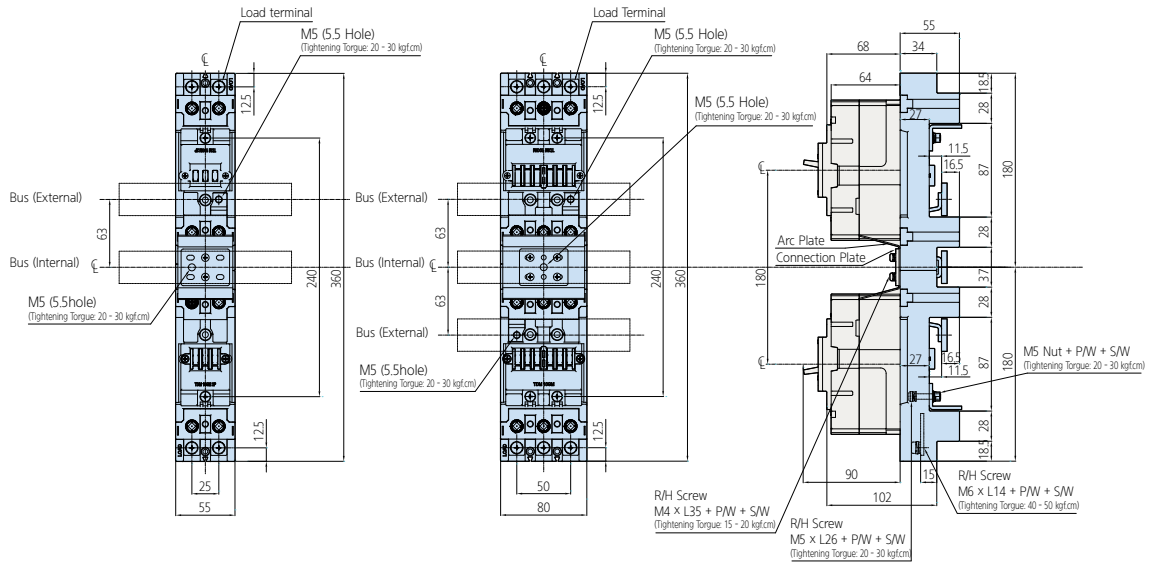


Dimensions for Panel Cutting and Mounting

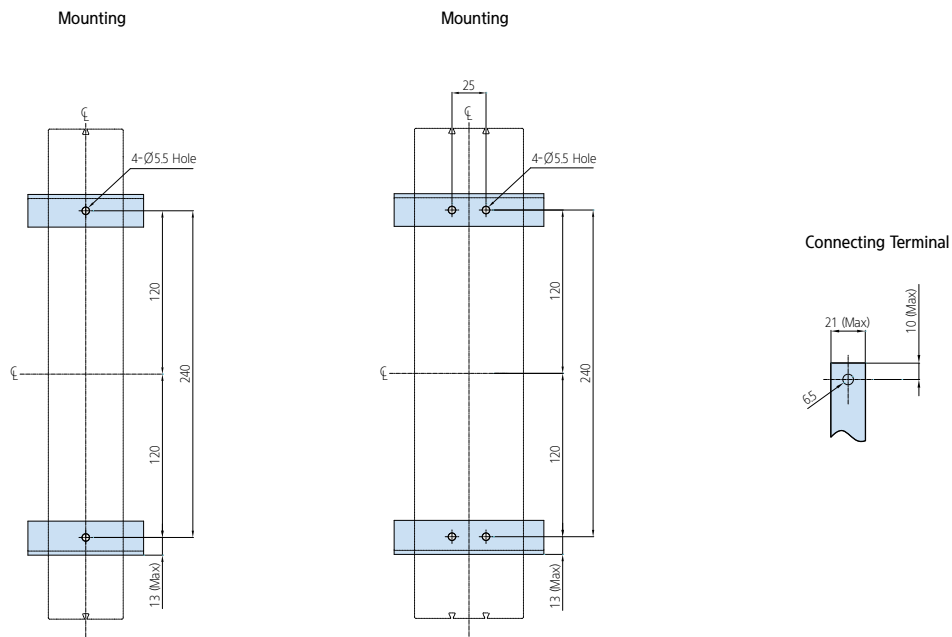

Plug-In Type HGM100


• HGM30, 50E/S, 60, 100

Dimension (TDA S Type)

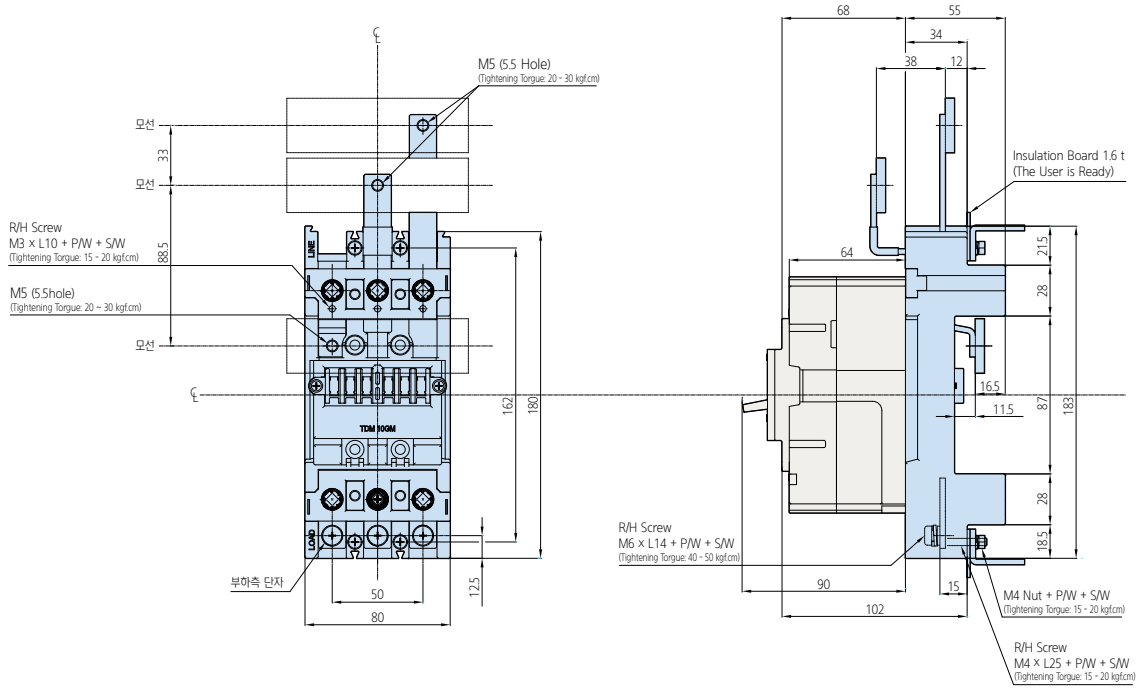


Dimensions for Panel Cutting and Mounting

Mounting

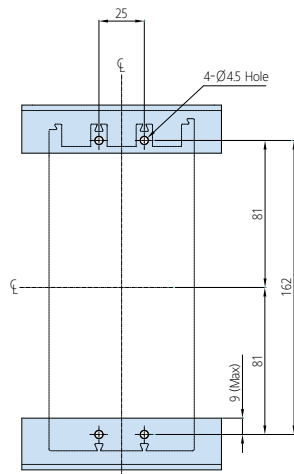

Connecting Terminal




Dimensions


Plug-In Type HGM100

• HGM30, 50E/S, 60, 100

Dimension (TDF Type)

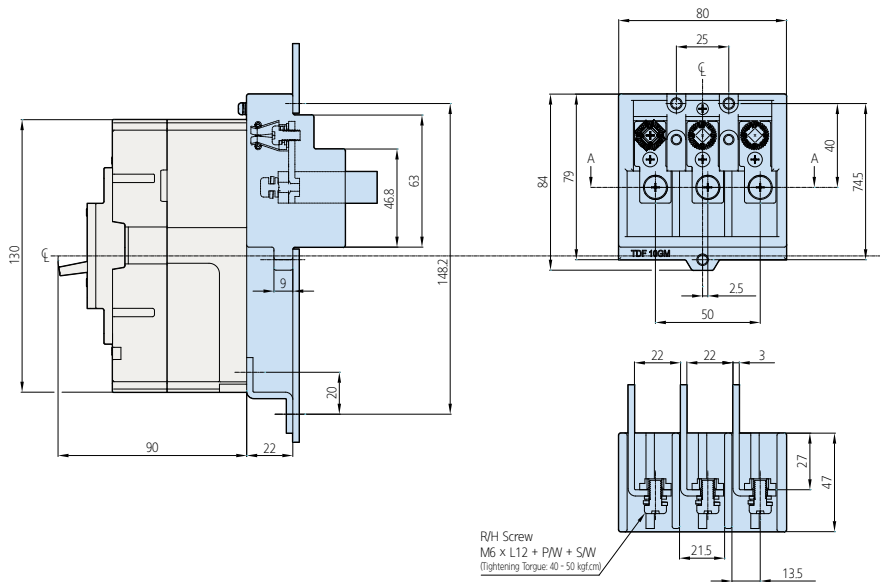


Dimensions for Panel Cutting and Mounting

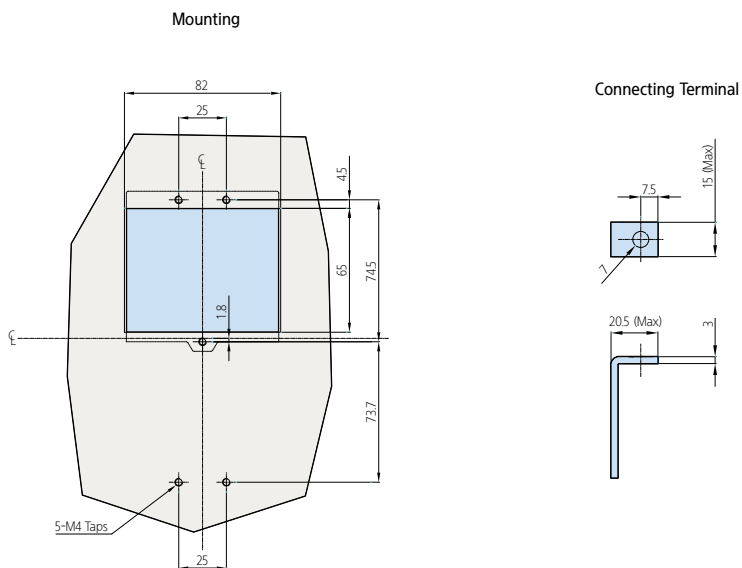


Plug-In Type HGM125

• HGM50H/L, 125

Dimension (TDM Type)

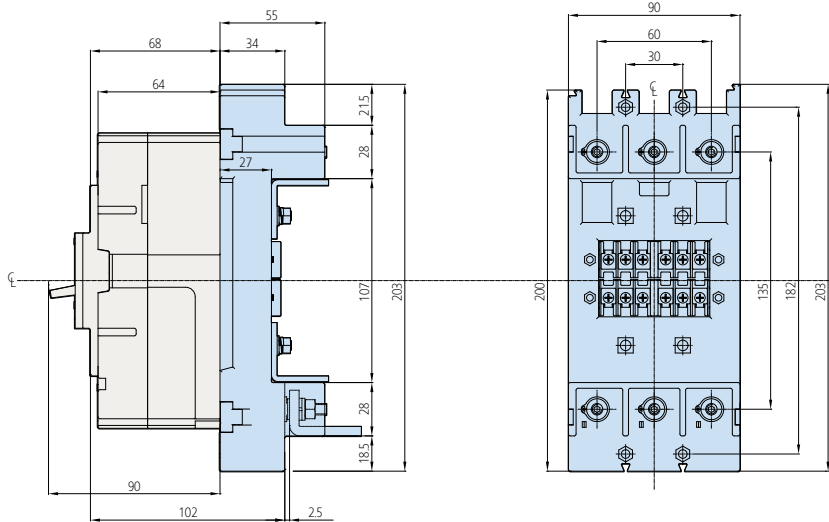

Dimensions for Panel Cutting and Mounting

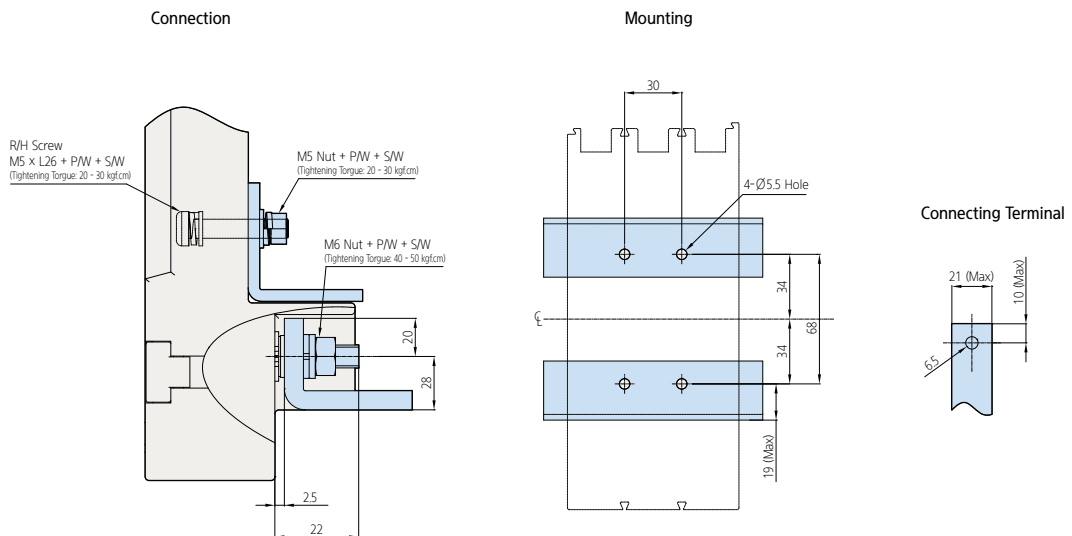


Dimensions

Plug-In Type HGM125


• HGM50H/L, 125

Dimension (TDA D Type)

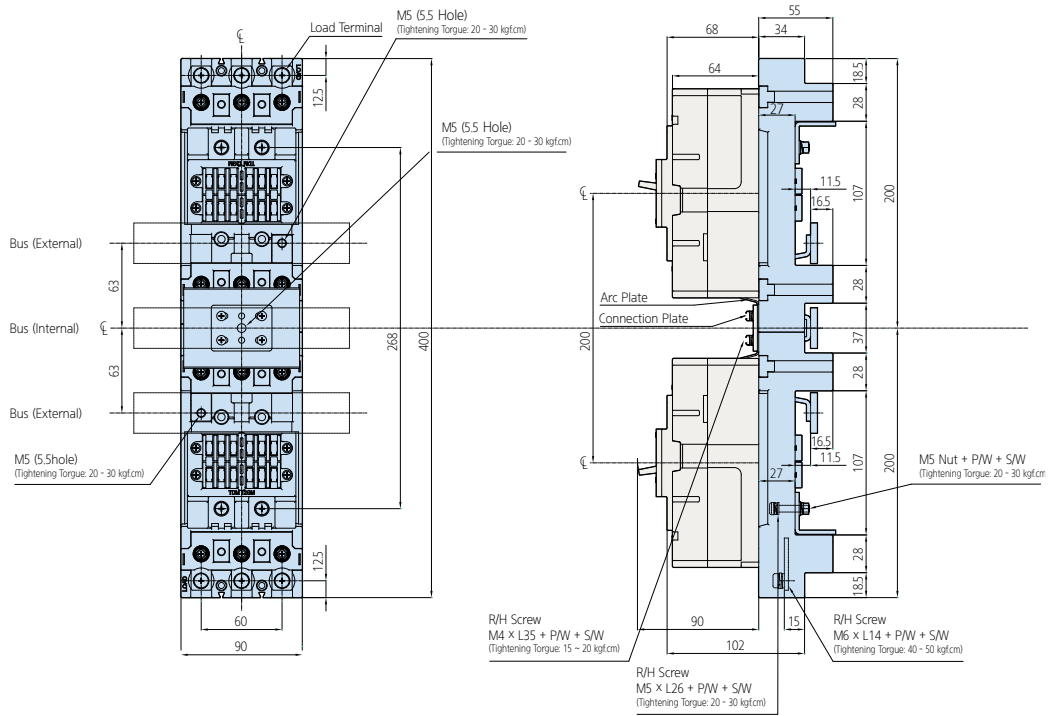


Dimensions for Panel Cutting and Mounting

Mounting

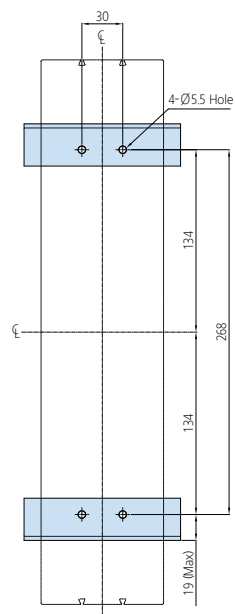


Connecting Terminal




Plug-In Type HGM125

• HGM50H/L, 125

Dimension (TDA S Type)

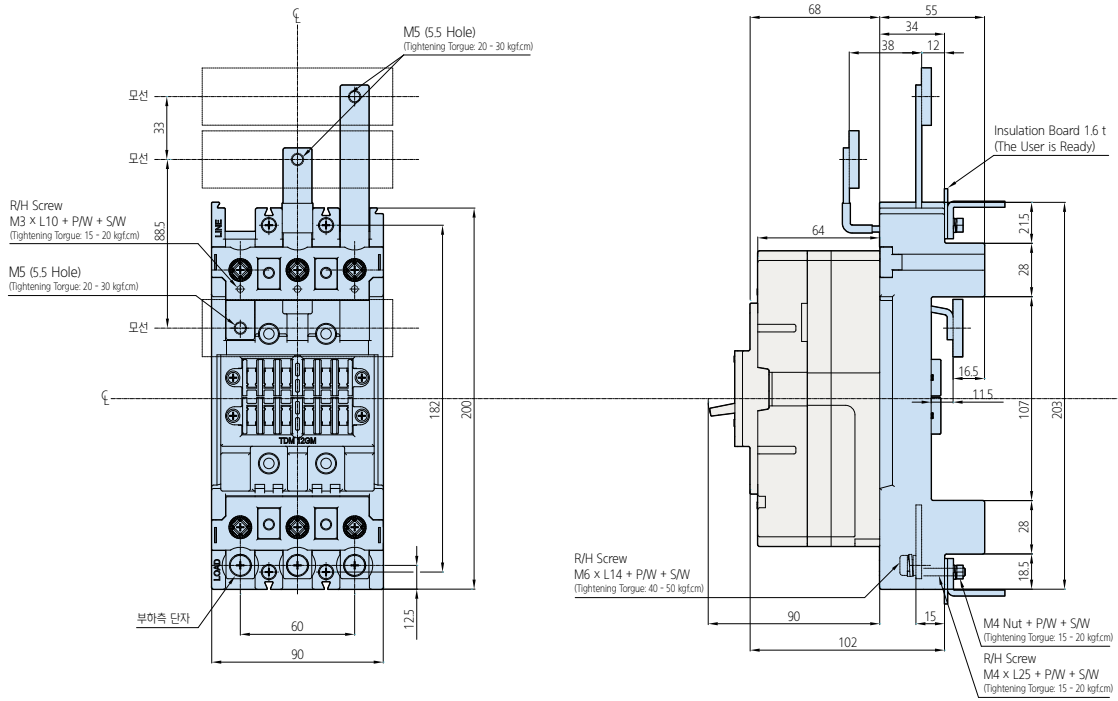

Dimensions for Panel Cutting and Mounting

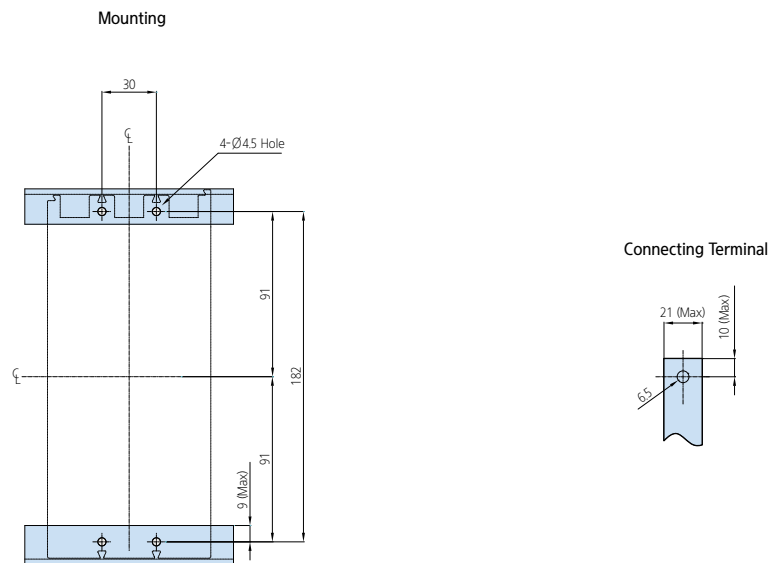


Dimensions

Plug-In Type HGM125


• HGM50H/L, 125

Dimension (TDF Type)

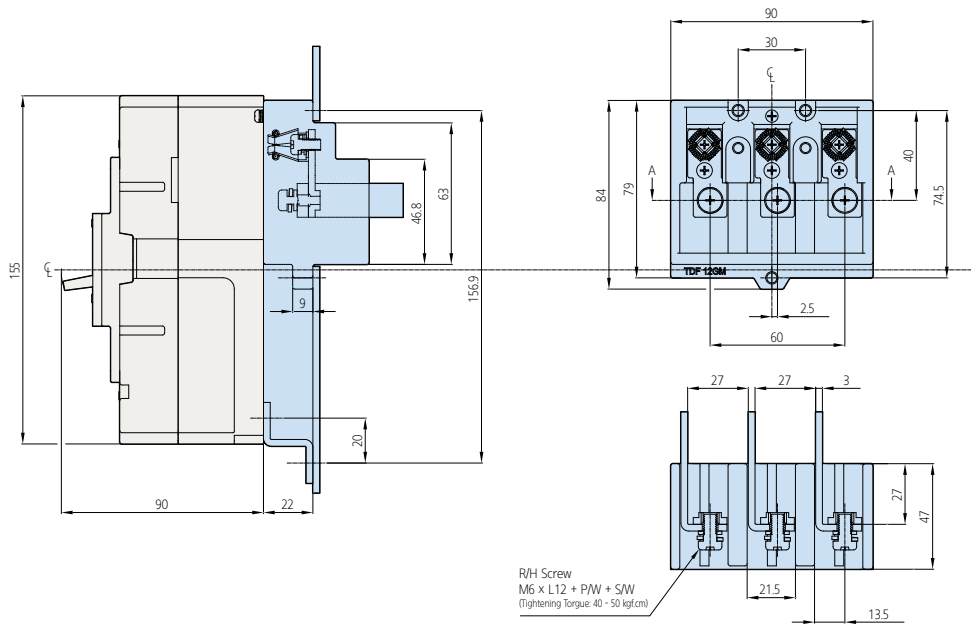


Dimensions for Panel Cutting and Mounting

Mounting

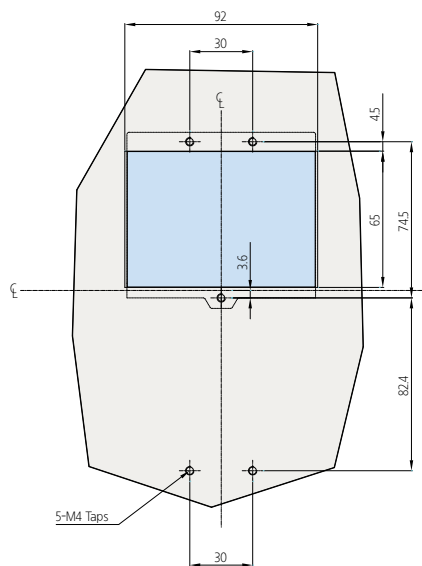


Connecting Terminal

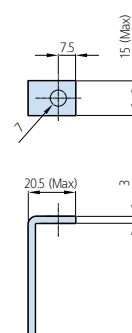

Plug-In Type HGM250


• HGM160, 250

Dimension (TDM Type)

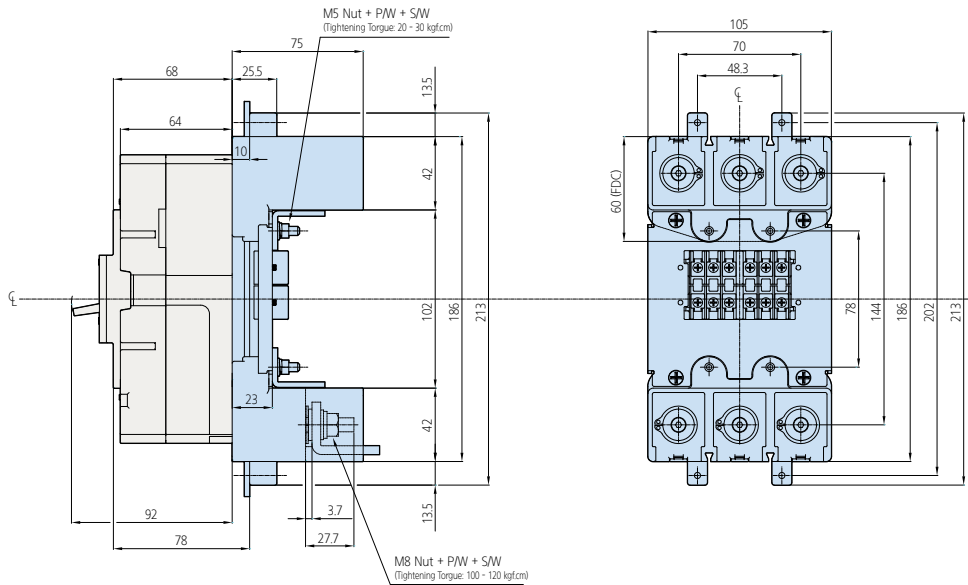


Dimensions for Panel Cutting and Mounting


Mounting

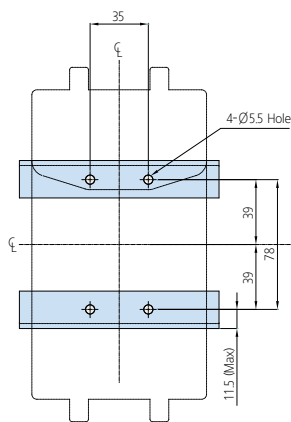

Dimension for Front Cover Cutting

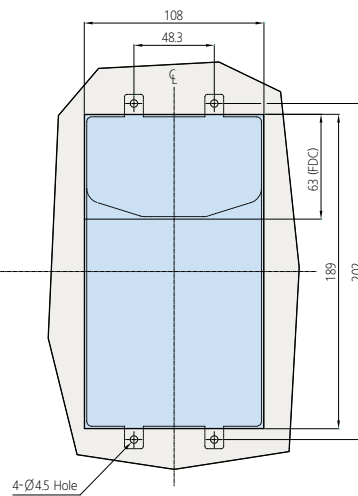

Connecting Terminal




Dimensions


Plug-In Type HGM400

• HGM400

Dimension (TDM Type)

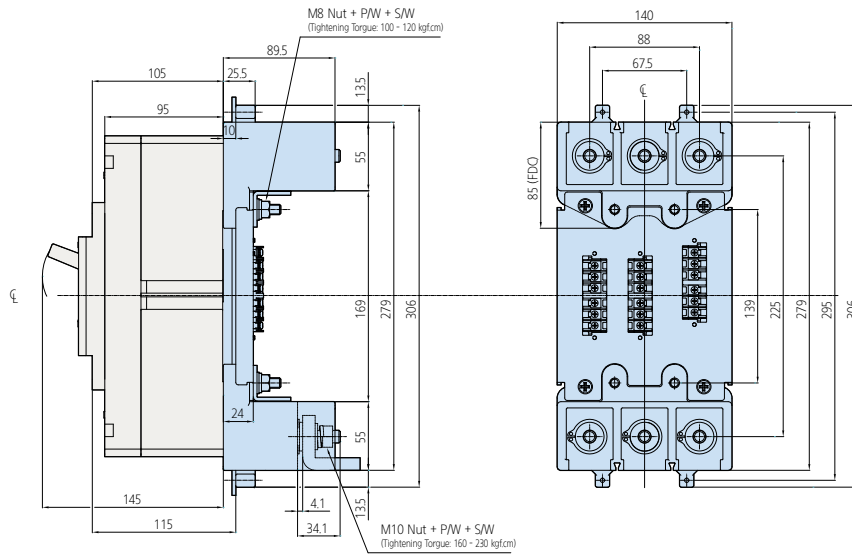


Dimensions for Panel Cutting and Mounting

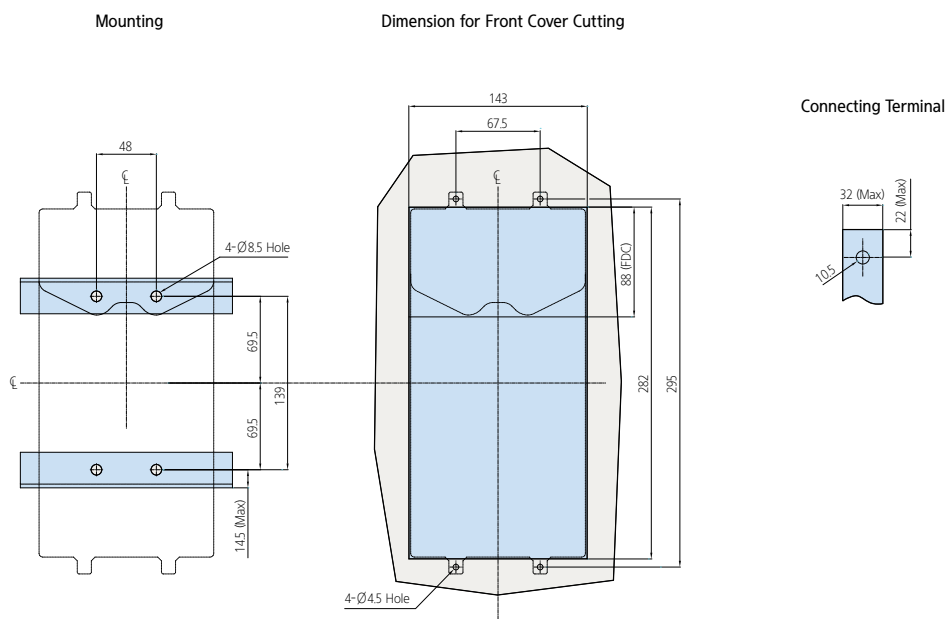


Plug-In Type HGM800

• HGM630, 800

Dimension (TDM Type)

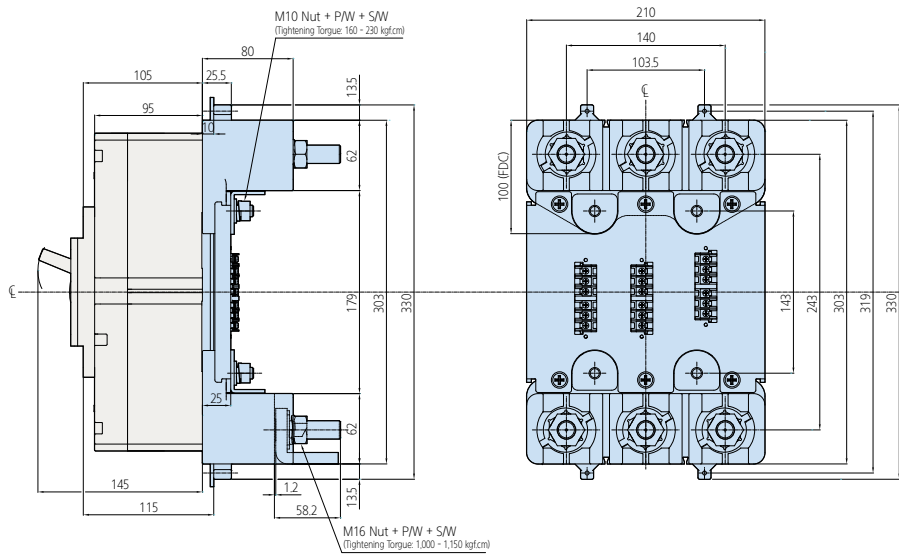

Dimensions for Panel Cutting and Mounting

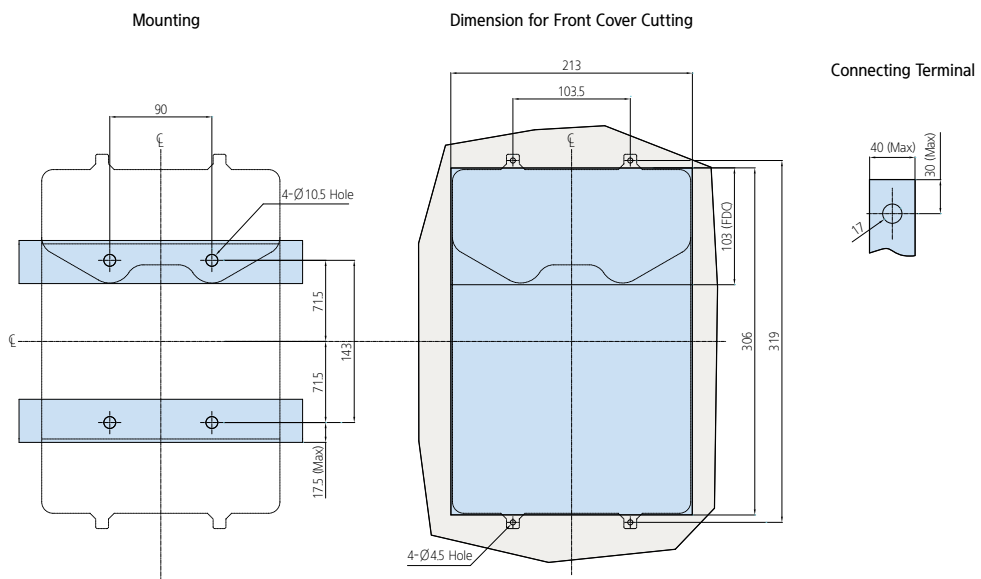


Dimensions


Rotary Handle HGM100

• HGM30, 50E/S, 60, 100

Direct Rotary Handle

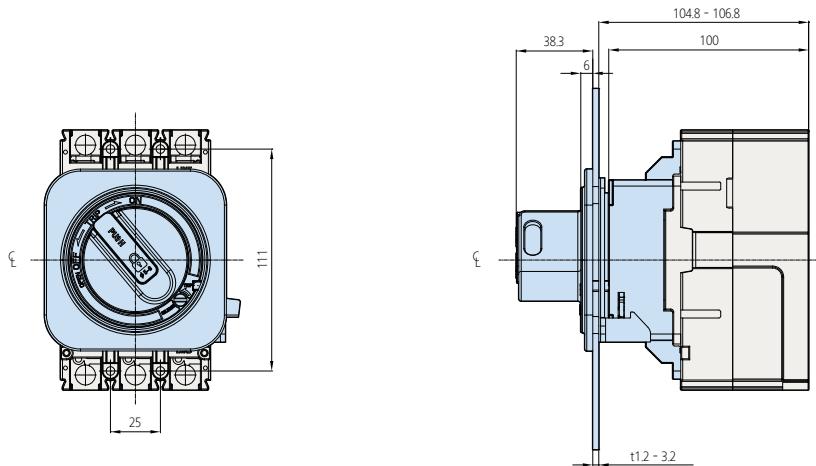


External Rotary Handle

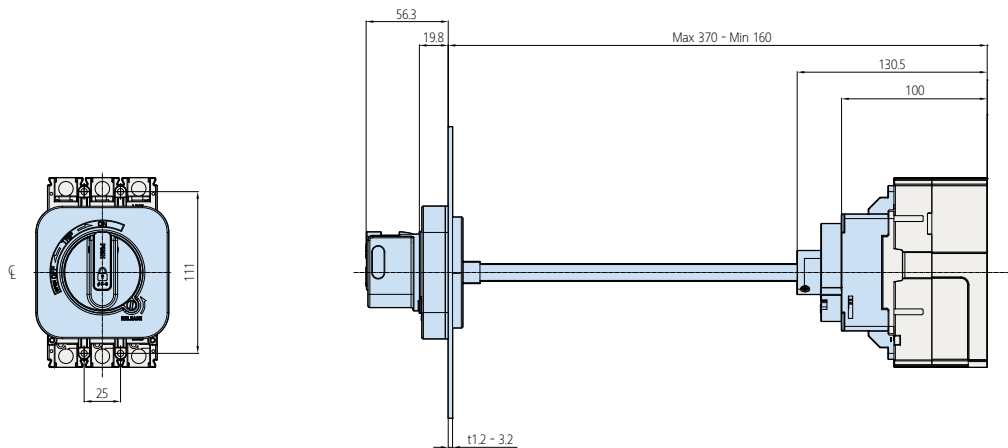


Panel Cut Dimensions for Body

Direct Rotary Handle

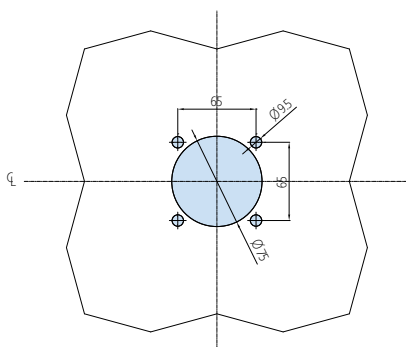


External Rotary Handle

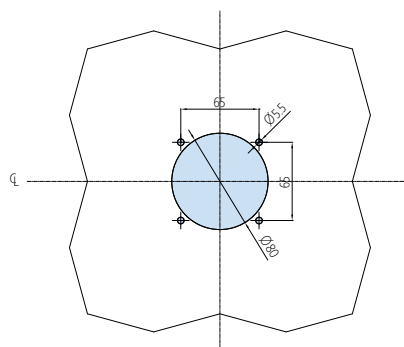


Rotary Handle HGM125

• HGM50H/L, 125

Direct Rotary Handle

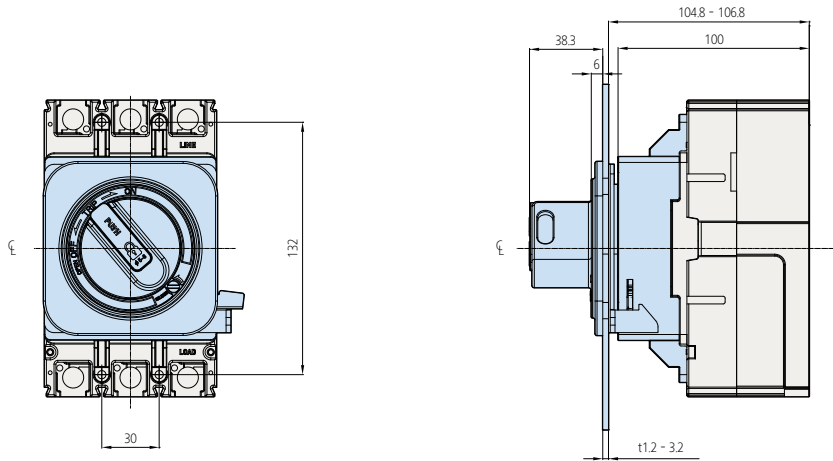


External Rotary Handle

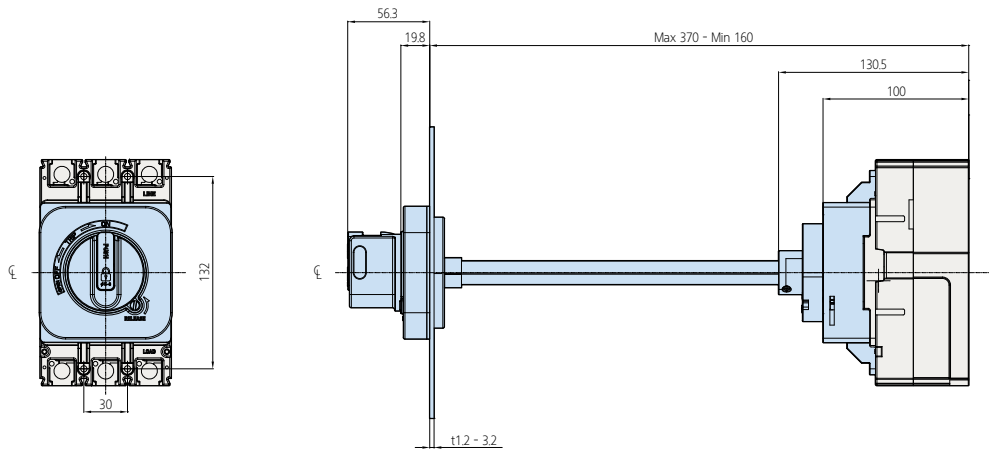


Panel Cut Dimensions for Body

Direct Rotary Handle

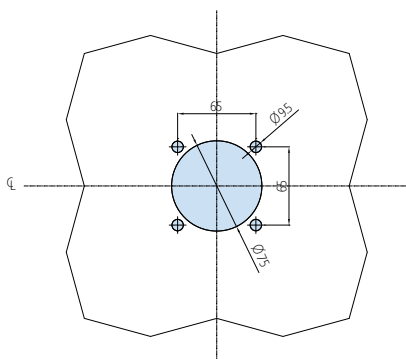

External Rotary Handle

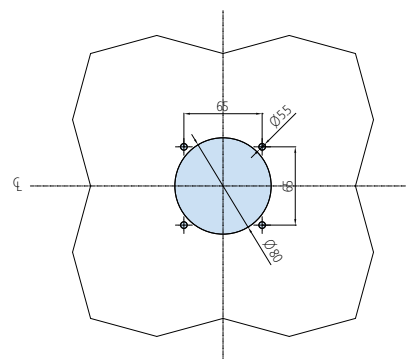


Dimensions


Rotary Handle HGM250

• HGM160, 250


Direct Rotary Handle

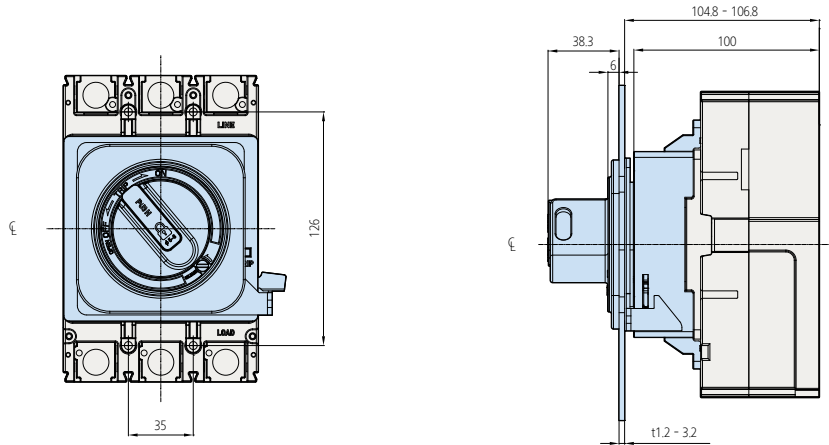

External Rotary Handle

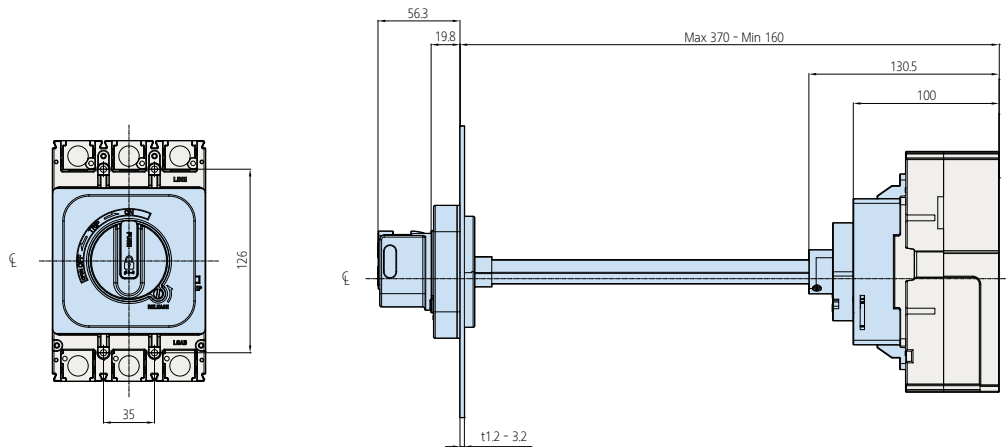


Panel Cut Dimensions for Body

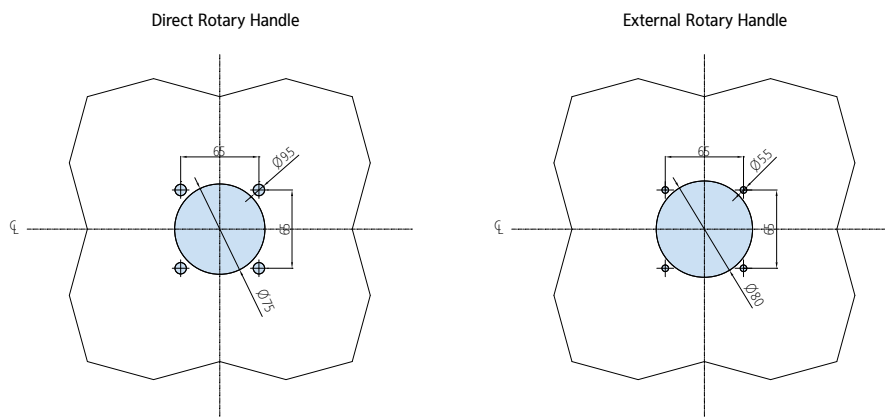


Rotary Handle HGM400

• HGM400

Direct Rotary Handle

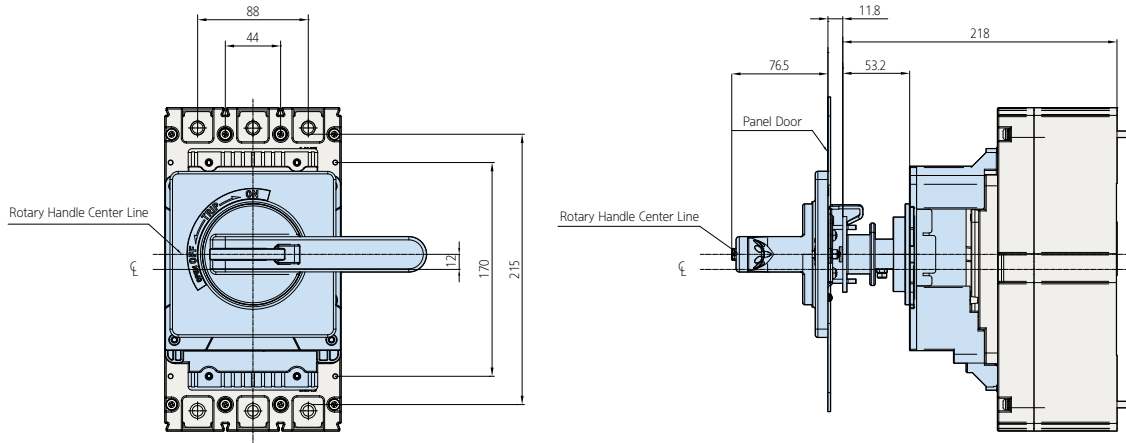


External Rotary Handle

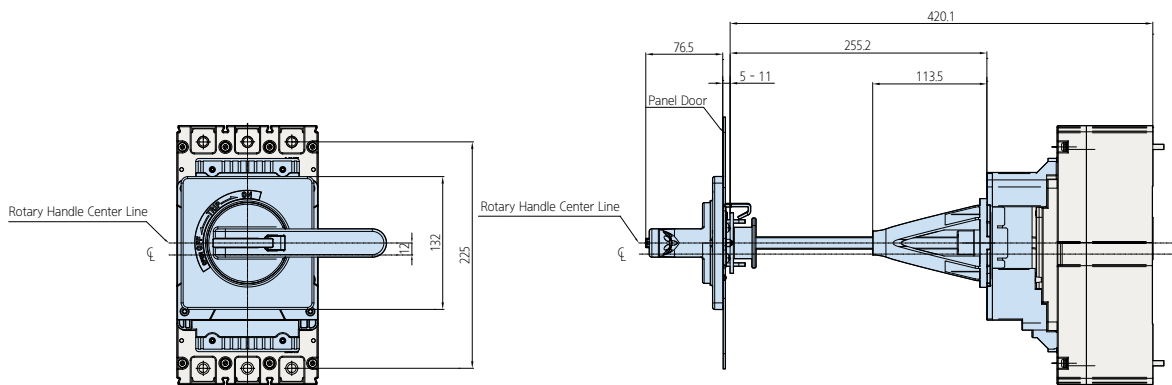


Panel Cut Dimensions for Body

Direct Rotary Handle

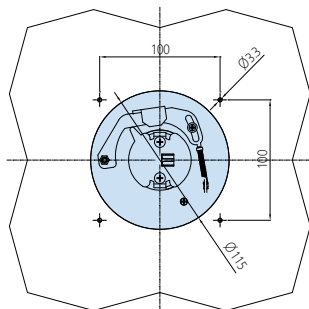

External Rotary Handle

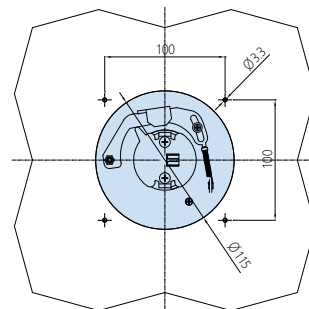


Dimensions


Rotary Handle HGM800

• HGM800


Direct Rotary Handle

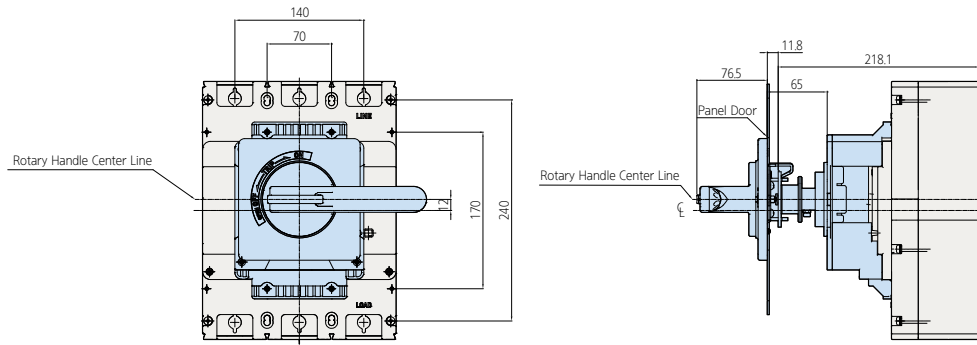

External Rotary Handle

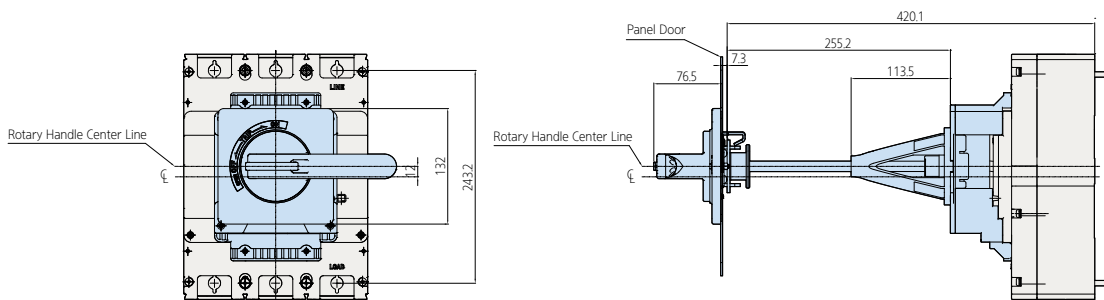


Panel Cut Dimensions for Body

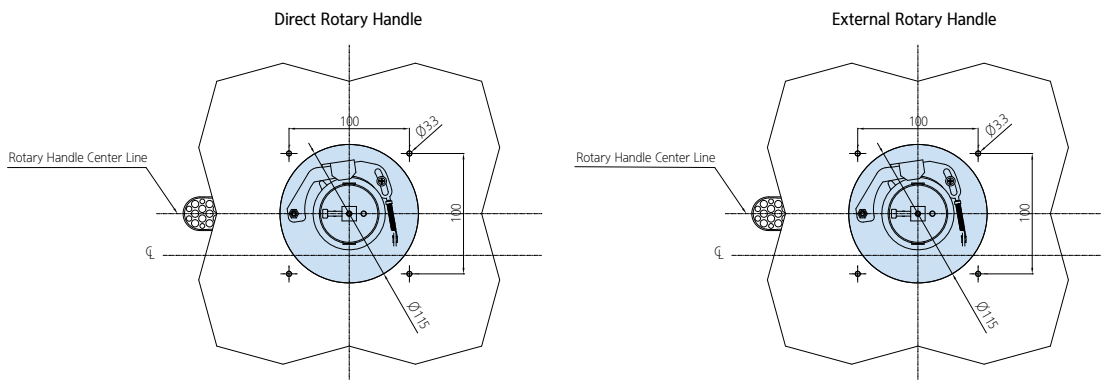


Mechanical Interlock HGM100

• HGM30, 50E/S, 60, 100


Dimension

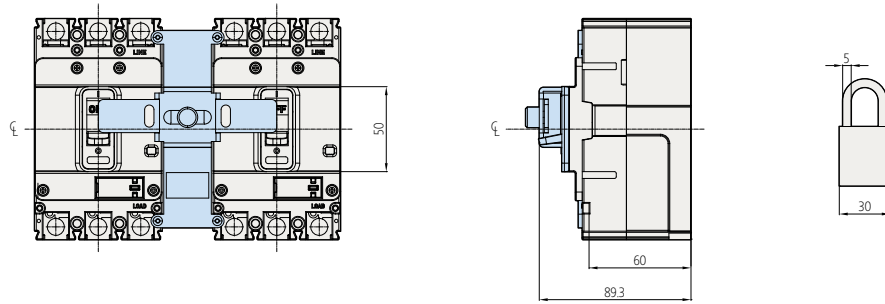

Panel Cut Dimensions for Body

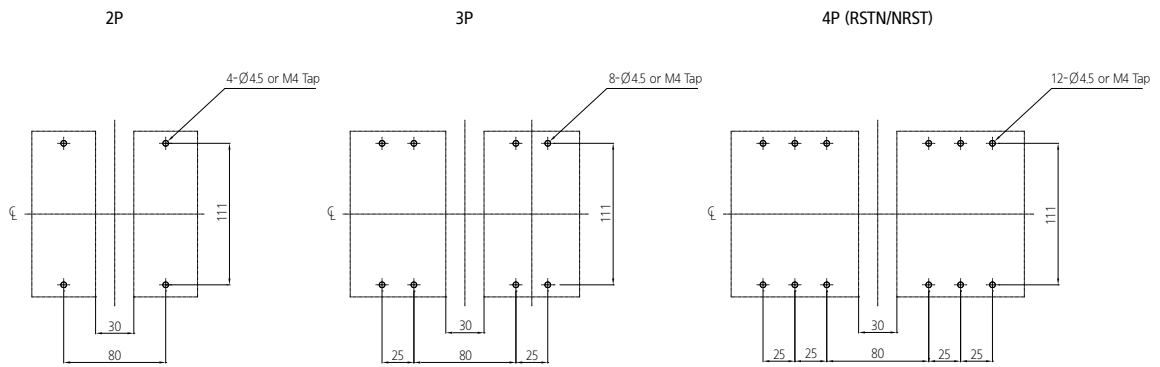

Dimension for Panel Cover Cutting

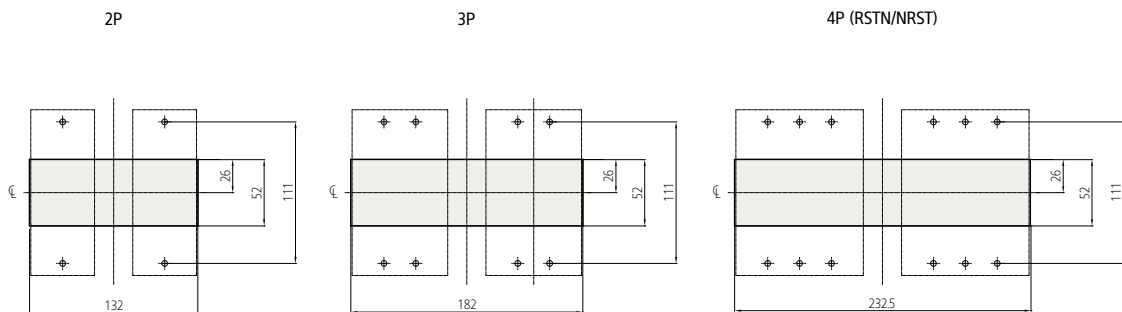


Dimensions


Mechanical Interlock HGM125

• HGM50H/L, 125


Dimension

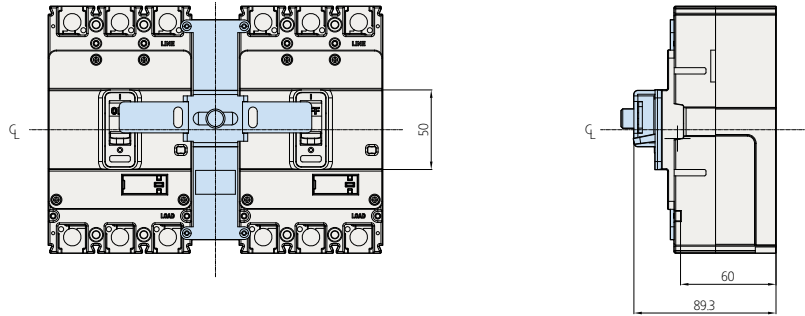

Panel Cut Dimensions for Body

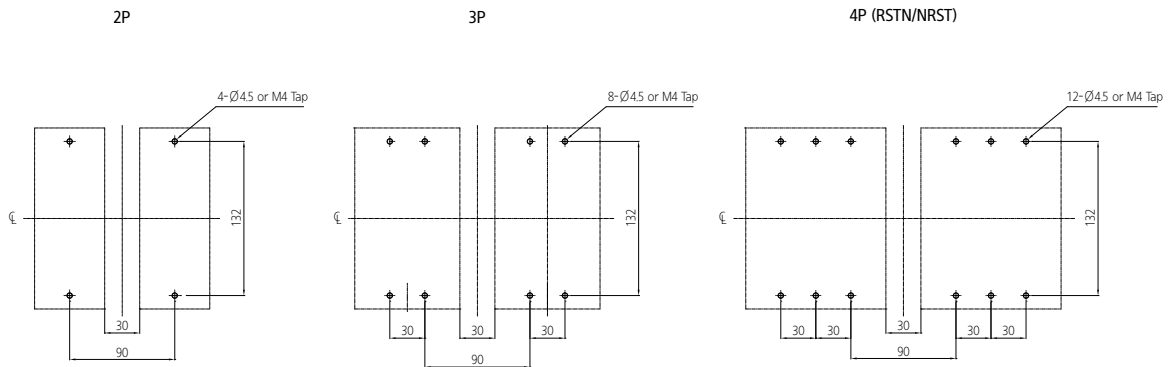


Dimension for Panel Cover Cutting

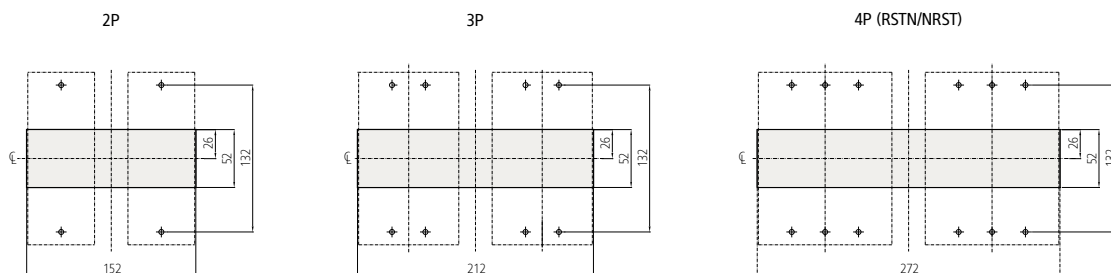


Mechanical Interlock HGM250

• HGM160, 250


Dimension

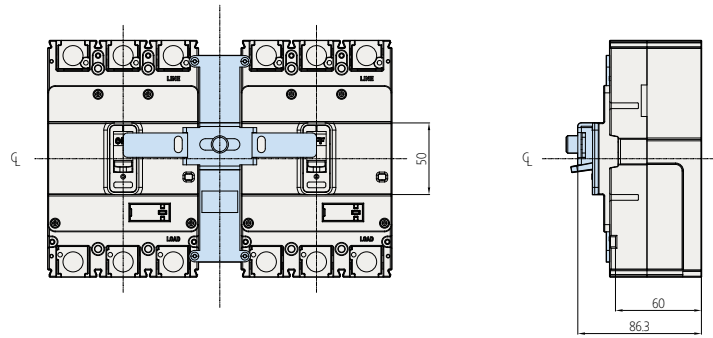

Panel Cut Dimensions for Body

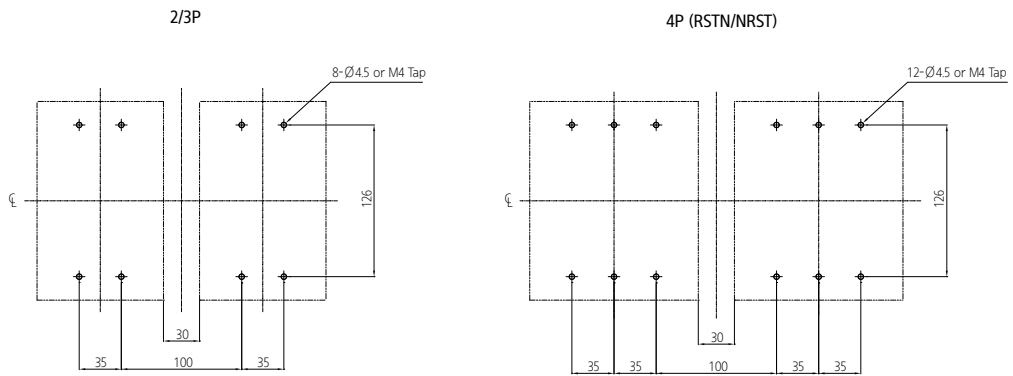

Dimension for Panel Cover Cutting

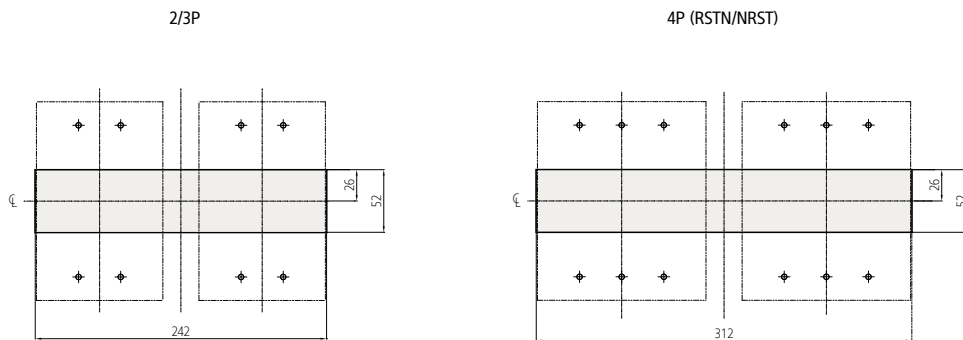


Dimensions


Mechanical Interlock HGM400

• HGM400


Dimension

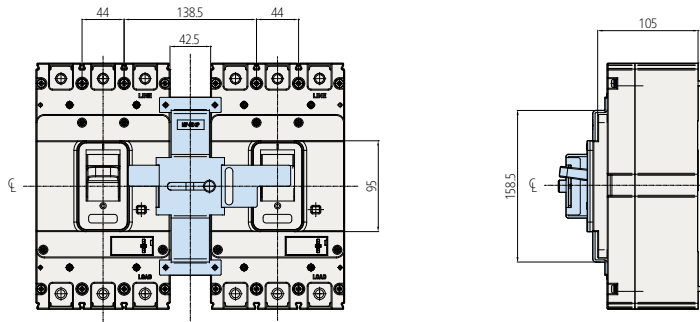

Panel Cut Dimensions for Body

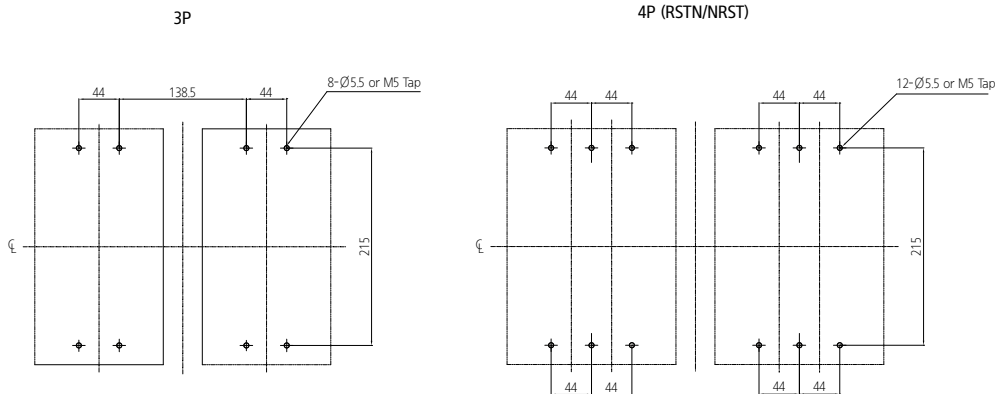


Dimension for Panel Cover Cutting

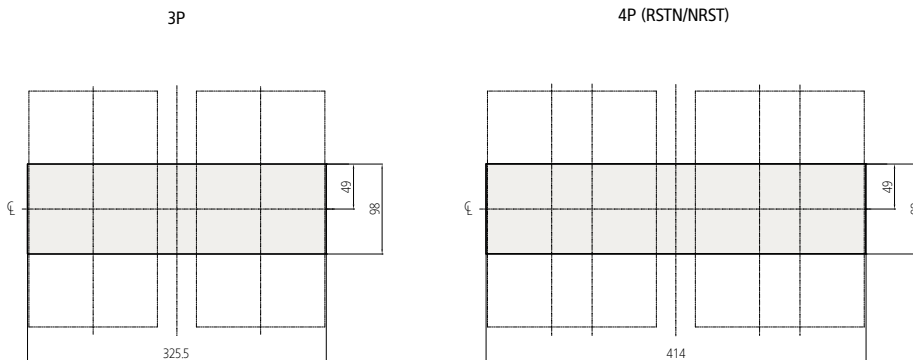


Mechanical Interlock HGM800

• HGM630, 800


Dimension

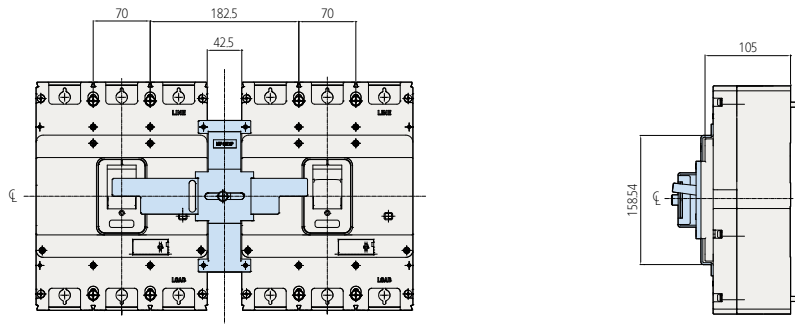

Panel Cut Dimensions for Body

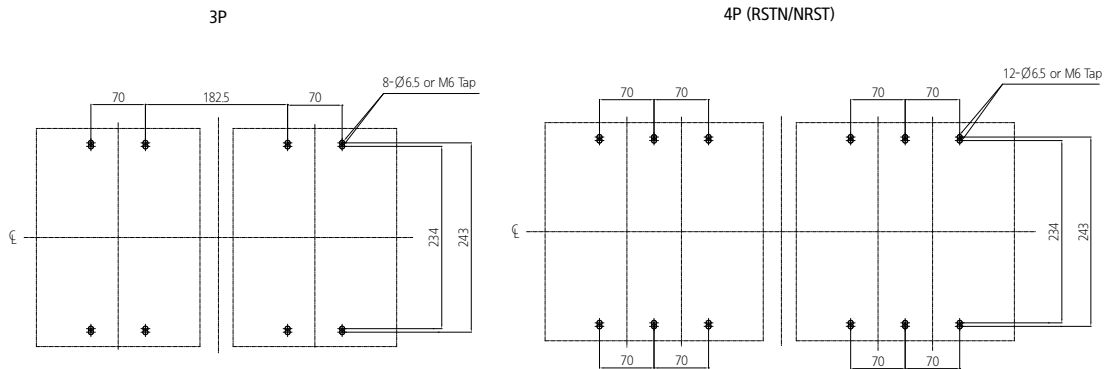

Dimension for Panel Cover Cutting

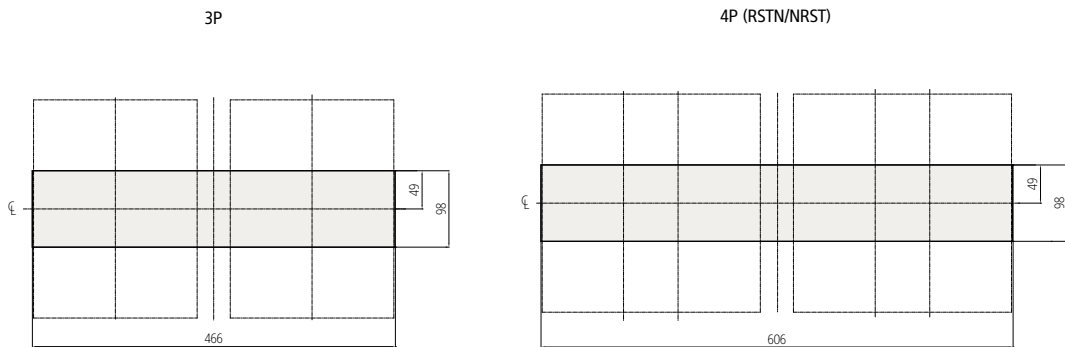


Dimensions


Terminal Cover HGM100

• HGM30, 50E/S, 60, 100

Long Type

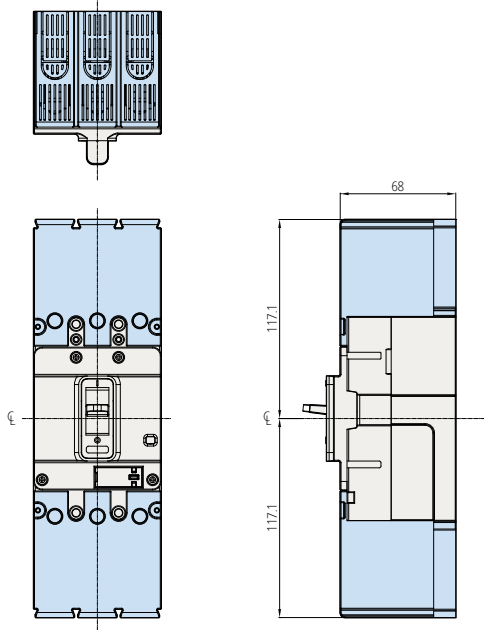


Short Type

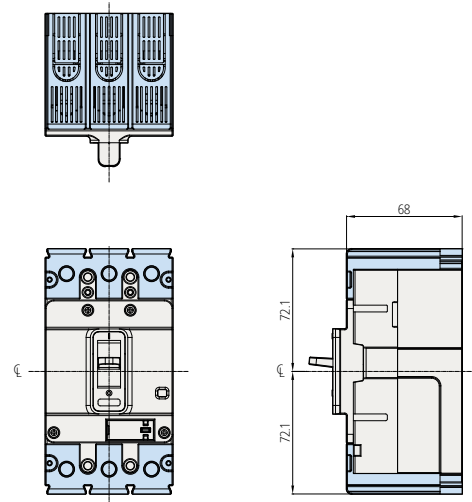


Terminal Cover HGM125

• HGM50H/L, 125

Long Type

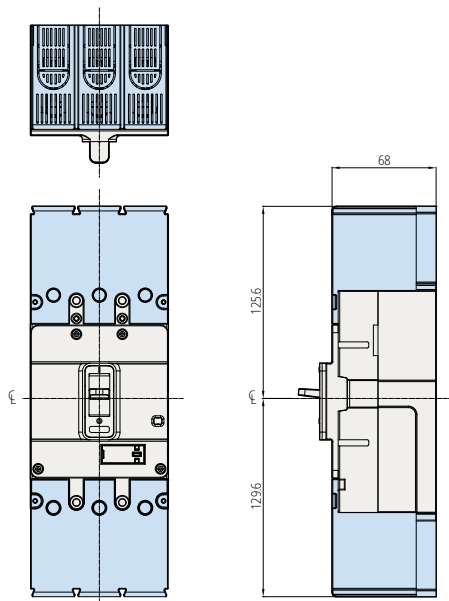


Short Type

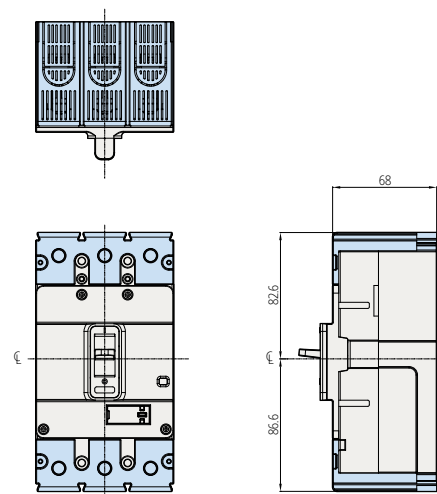


Terminal Cover HGM250

• HGM160, 250

Long Type

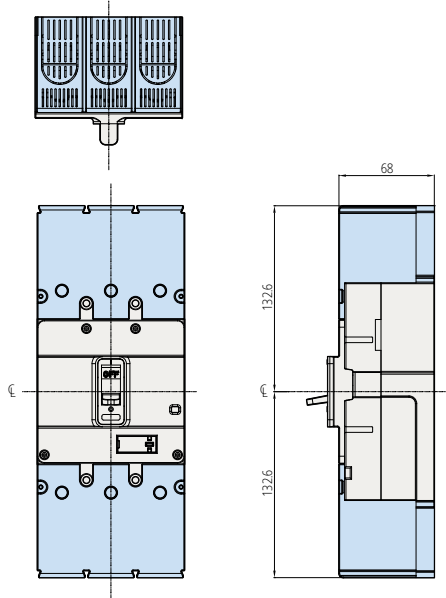


Short Type

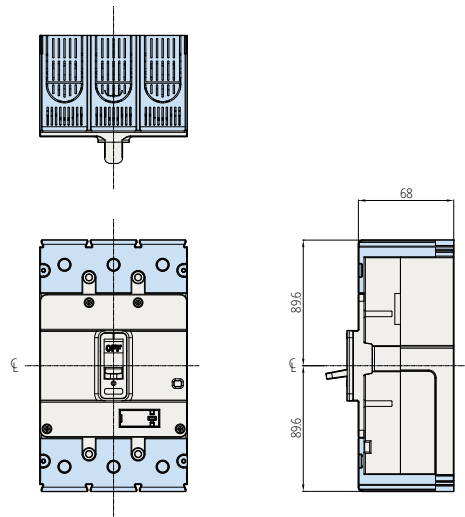


Terminal Cover HGM400

• HGM400

Long Type

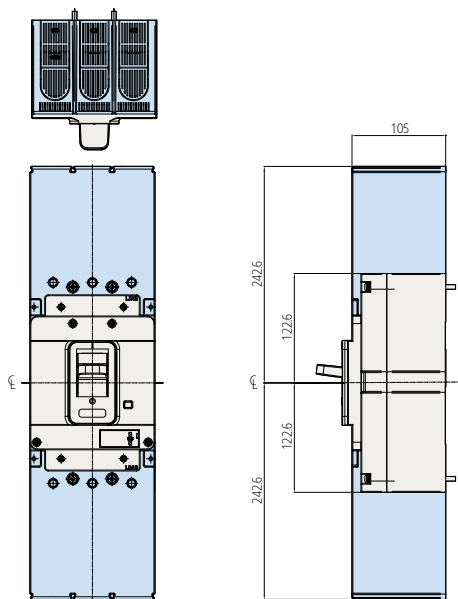

Short Type

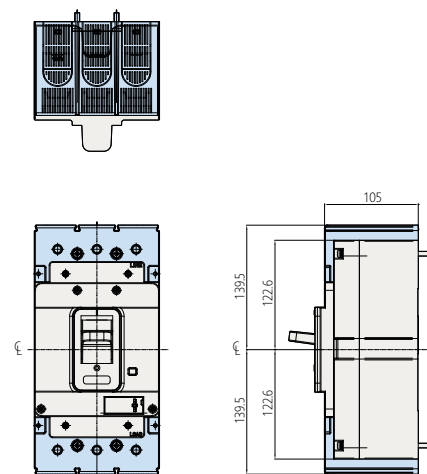


Dimensions


Terminal Cover HGM800

• HGM800

Long Type

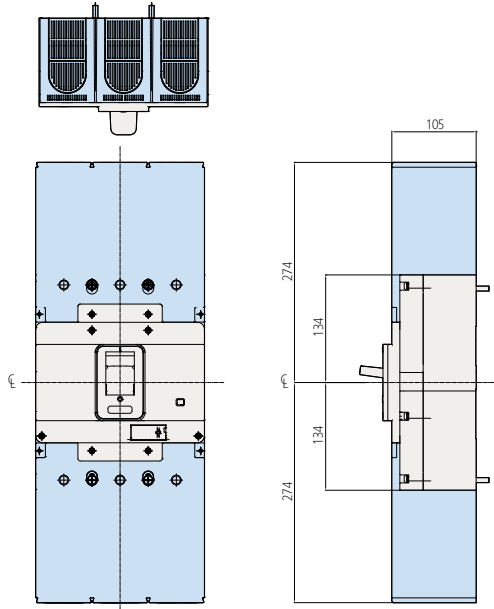


Short Type

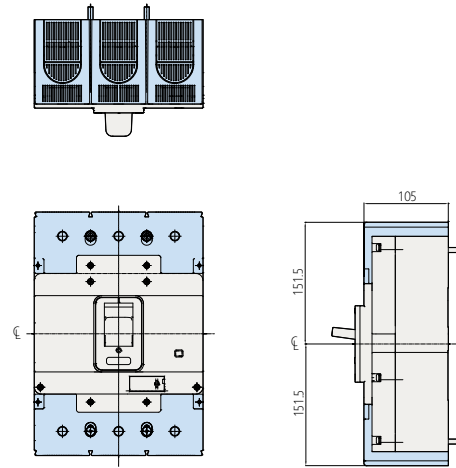


Motor Operator


HGM30, 50E/S, 60, 100

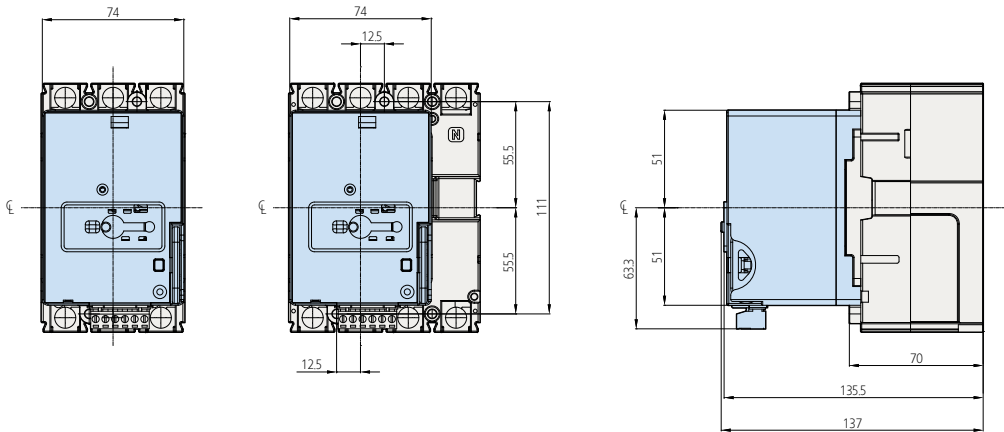

HGM50H/L, 125

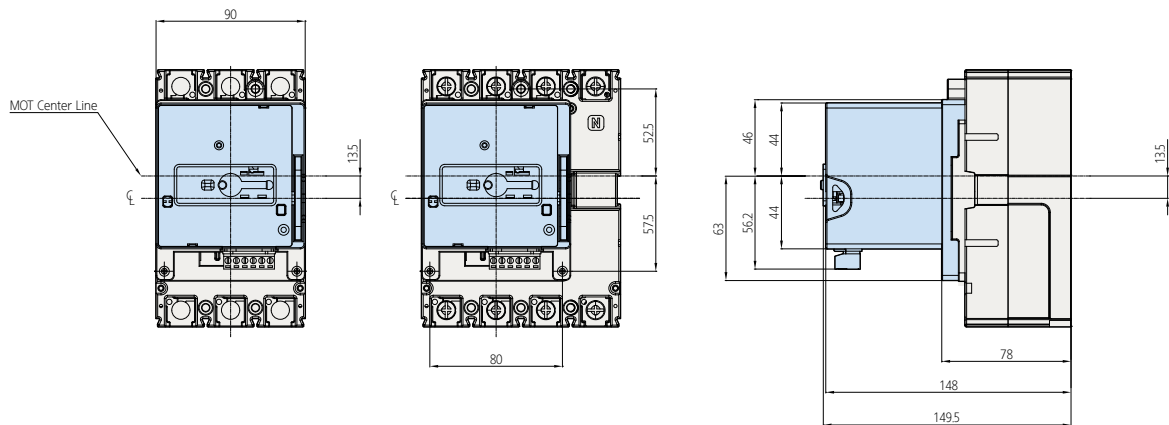


HGM160, 250

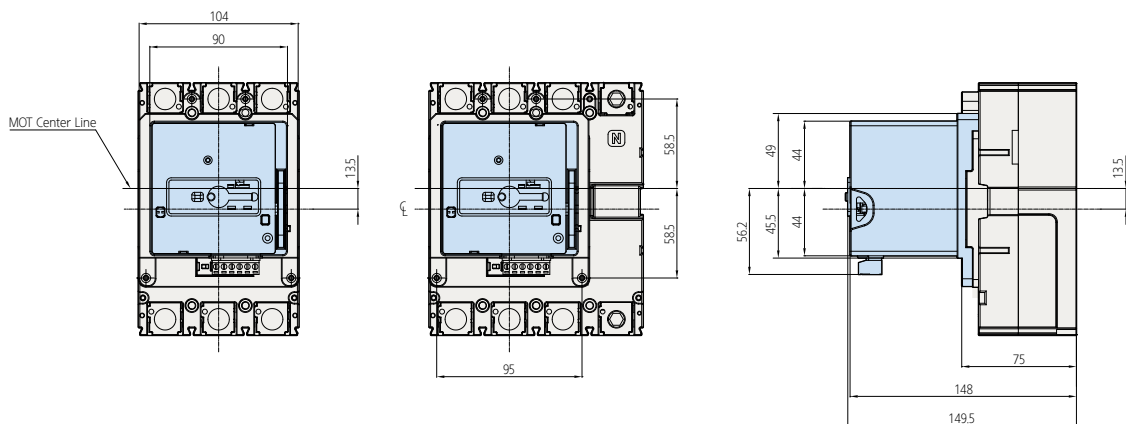


Dimensions

Motor Operator

HGM400

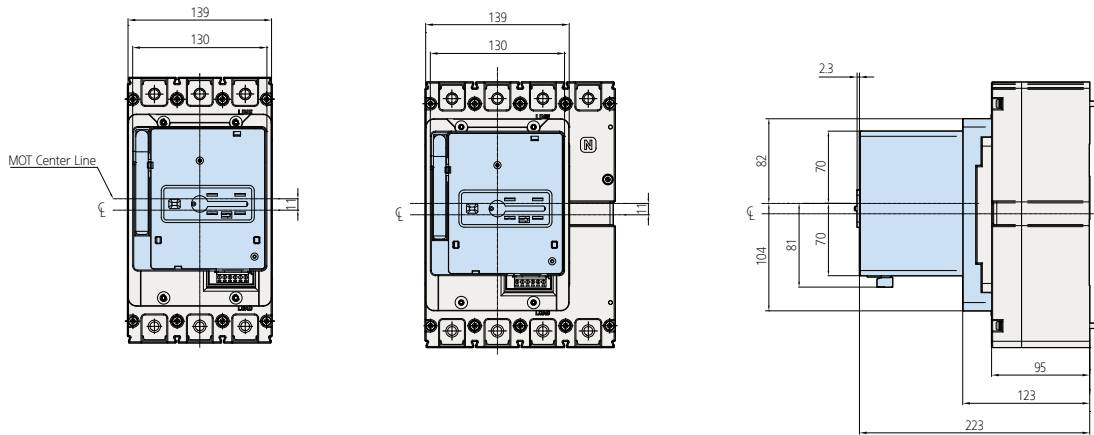


HGM630, 800

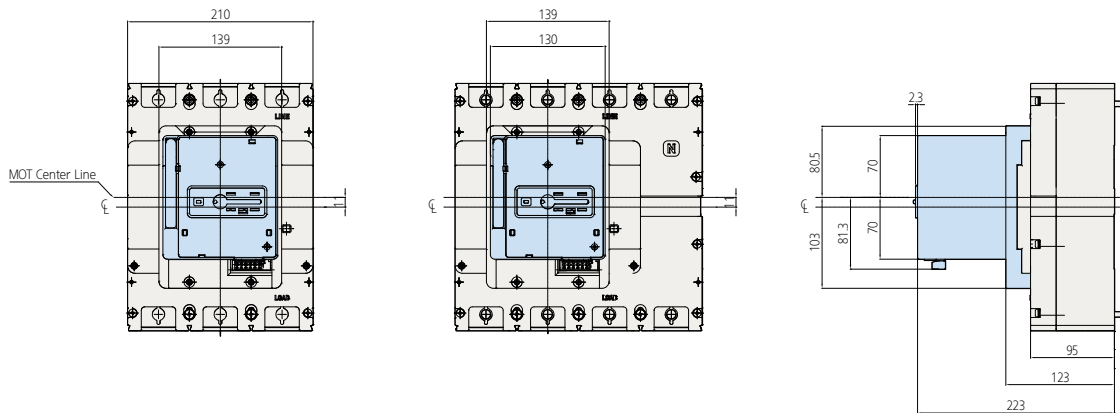


Lug Terminal


HGM30, 50E/S, 60, 100

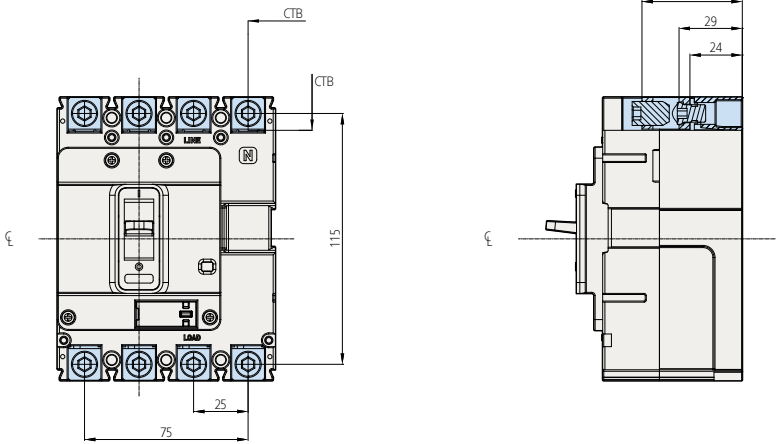

HGM50H/L, 125

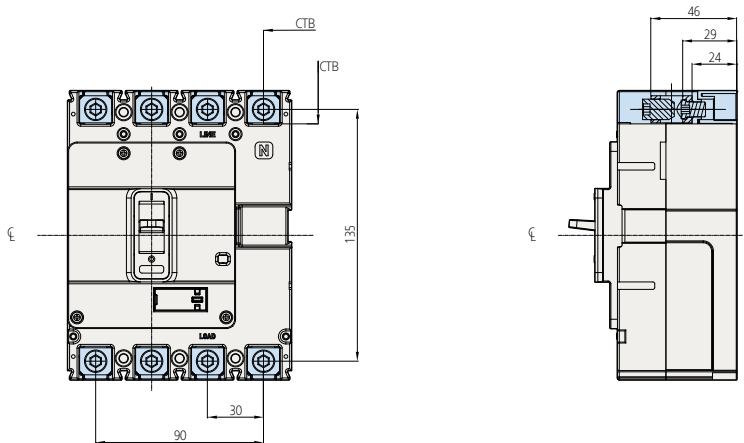

HGM160, 250

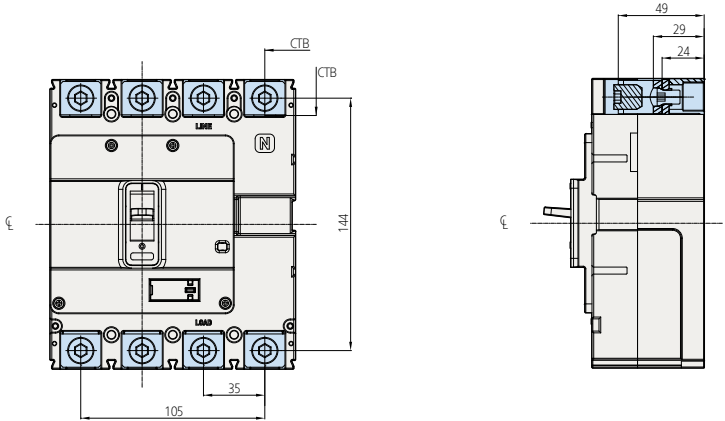


※ When using the CTB, please apply lime/load insulation barrier.


Dimensions

Lug Terminal

HGM400

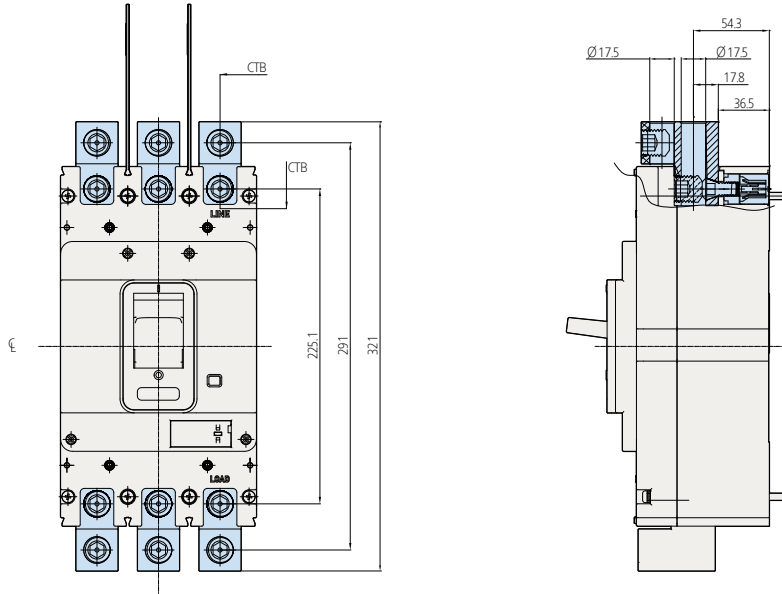

HGM630, 800

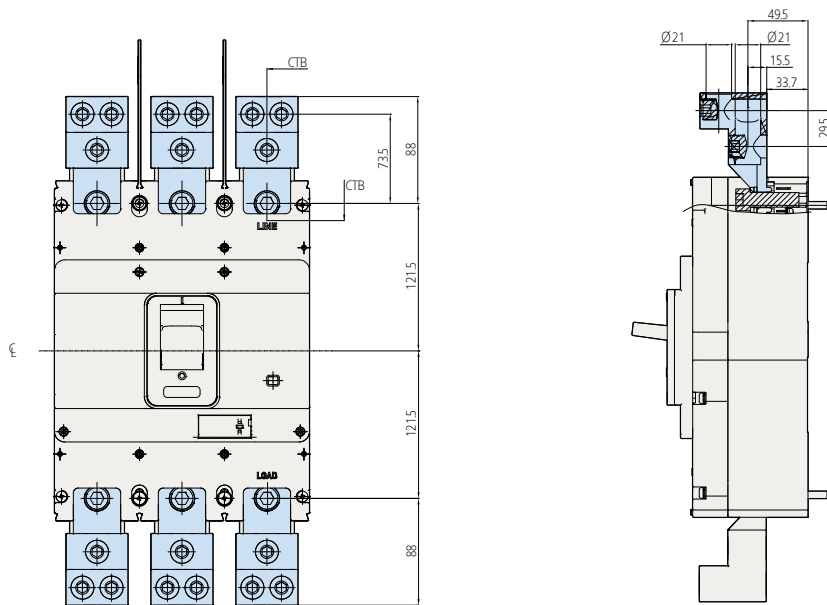


※ When using the CTB, please apply lime/load insulation barrier.

DIN Rail Adaptor

• HGM100

DIN Rail Mounting Hole

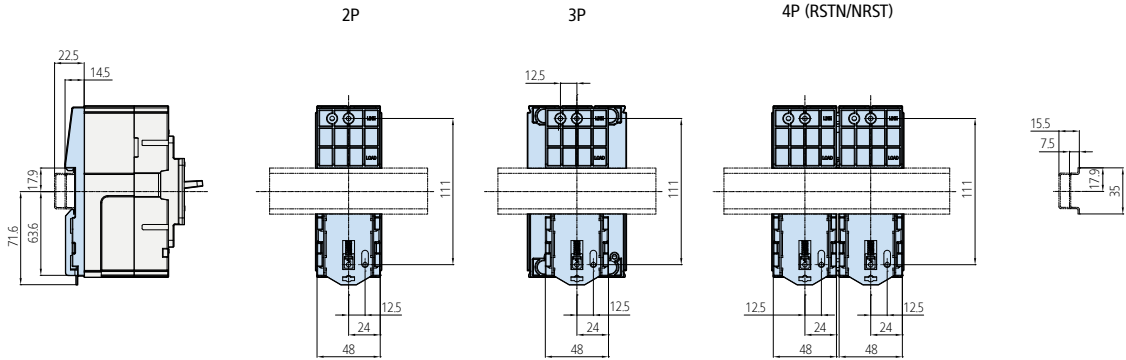

Order Information

Order Information 122

Ordering Information

HGM Type Molded Case Circuit Breakers (MCCB) 123


HGM Type ZCT Molded Case Circuit Breakers (ZCT MCCB) 135

HGE Type Earth Leakage Circuit Breaker (ELCB) 141

HGM/HGE Type Accessory Separately 153

Order Information

HG Type MCCB, ELCB

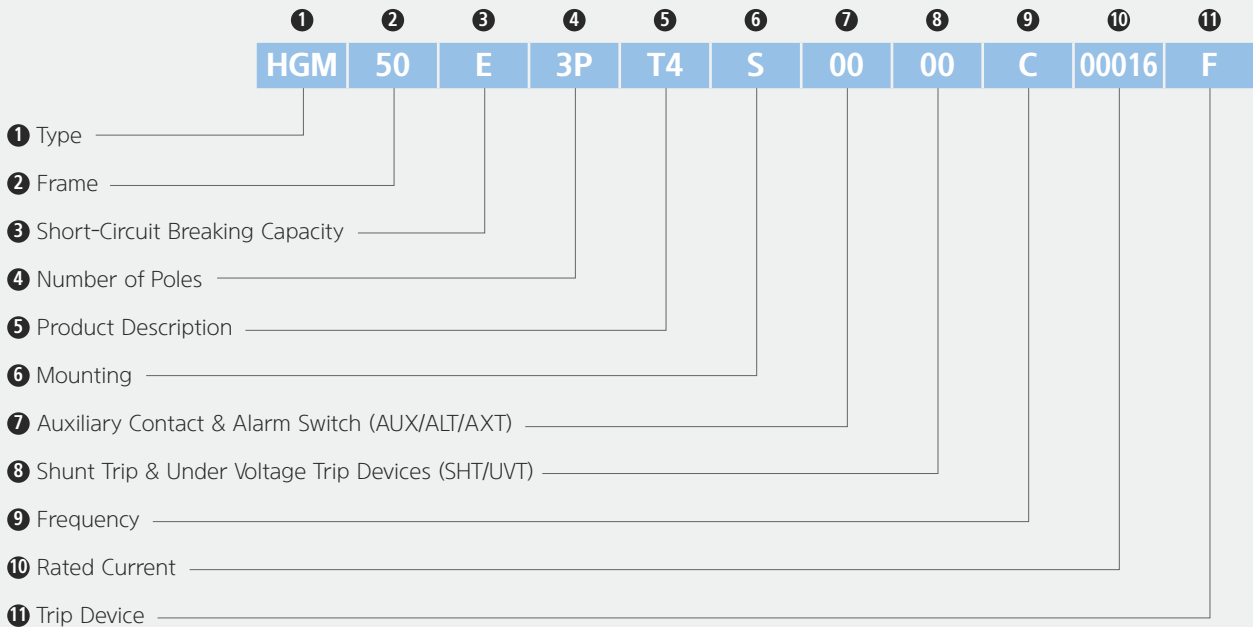

① Type	
HGM	Molded Case Circuit Breakers
HGE	Earth Leakage Circuit Breakers
② Frame	
30	30 AF
50	50 AF
60	60 AF
100	100 AF
125	125 AF
160	160 AF
250	250 AF
400	400 AF
630	630 AF
800	800 AF
③ Short-Circuit Breaking Capacity	
E	E Type
S	S Type
H	H Type
L	L Type

④ Number of Poles	
Normal type MCCB/ELCB	
2P	2 Pole
3P	3 Pole
4P	4 Pole (RSTN)
4PN	4 Pole (NRST)
ZCT MCCB	
2Z	2 Pole
3Z	3 Pole
4Z	4 Pole
⑤ Product Description	
MCCB: Ambient temperature	
T4	40/45 °C
T5	50 °C
ELCB: Rated residual current	
G4	30 mA
G5 ¹⁾	100 mA

⑥ Mounting	
S	Front connection
BS ²⁾	Terminal busbar (Straight type)
BE ³⁾	Terminal busbar (Extended type)
P	Plug-in
F	Line: Plug-in Load: Front connection
X	PC/CBM Non-attachment
⑦ Auxiliary Contact & Alarm Switch (AUX/ALT/AXT)	
00	Non-attachment
10	AUX 1C
20	AUX 2C
01	ALT 1C
11	AUX 1C + ALT 1C
21	AUX 2C + ALT 1C

⑧ Shunt Trip & Under Voltage Trip Devices (SHT/UVT)	
00	Non-attachment
S1	SHT AC100 - 120 V
S2	SHT AC200 - 230 V
S3	SHT AC380 - 415 V
S4	SHT AC440 - 480 V
S5	SHT DC24 V
S6	SHT DC100 - 125 V
S7	SHT DC48 V
S8	SHT DC60 V
U1	UVT AC100 - 120 V
U2	UVT AC200 - 230 V
U3	UVT AC380 - 415 V
U4	UVT AC440 - 480 V
U5	UVT DC24 V
U6	UVT DC100 - 125 V
U7	UVT DC48 V

⑨ Frequency	
C	50/60 Hz in common

⑩ Rated Current	
00016	16 A
00020	20 A
	⋮
00800	800 A

⑪ Trip Device	
-	Fixed thermal/ Fixed instantaneous
F	Adjustable thermal/ Fixed instantaneous



※ 1) 100/300/500/1,000 mA adjustable In case of time delay type, please order at 100 mA.
 2) Exclusive for 630 AF, 800 AF.
 3) Exclusive for 400 AF.

Ordering Information

HGM Type Molded Case Circuit Breakers (MCCB)

- Normal type/Front connection
- Except for accessory, Based on ambient temperature 40 °C and frequency 50/60 Hz

Adjustable (Thermal Adjustable / Instantaneous Fixing)


30 AF	In	2 Pole	3 Pole	4 Pole (RSTN)	4 Pole (NRST)	
	HGM30E...16 kA / 460 V					
	16 A	HGM30E 2PT4S0000C 00016F	HGM30E 3PT4S0000C 00016F	HGM30E 4PT4S0000C 00016F	HGM30E 4PLT4S0000C 00016F	
	20 A	HGM30E 2PT4S0000C 00020F	HGM30E 3PT4S0000C 00020F	HGM30E 4PT4S0000C 00020F	HGM30E 4PLT4S0000C 00020F	
	25 A	HGM30E 2PT4S0000C 00025F	HGM30E 3PT4S0000C 00025F	HGM30E 4PT4S0000C 00025F	HGM30E 4PLT4S0000C 00025F	
	32 A	HGM30E 2PT4S0000C 00032F	HGM30E 3PT4S0000C 00032F	HGM30E 4PT4S0000C 00032F	HGM30E 4PLT4S0000C 00032F	
	HGM30S...20 kA / 460 V					
	16 A	HGM30S 2PT4S0000C 00016F	HGM30S 3PT4S0000C 00016F	HGM30S 4PT4S0000C 00016F	HGM30S 4PLT4S0000C 00016F	
	20 A	HGM30S 2PT4S0000C 00020F	HGM30S 3PT4S0000C 00020F	HGM30S 4PT4S0000C 00020F	HGM30S 4PLT4S0000C 00020F	
	25 A	HGM30S 2PT4S0000C 00025F	HGM30S 3PT4S0000C 00025F	HGM30S 4PT4S0000C 00025F	HGM30S 4PLT4S0000C 00025F	
	32 A	HGM30S 2PT4S0000C 00032F	HGM30S 3PT4S0000C 00032F	HGM30S 4PT4S0000C 00032F	HGM30S 4PLT4S0000C 00032F	
	50 AF	In	2 Pole	3 Pole	4 Pole (RSTN)	4 Pole (NRST)
		HGM50E...16 kA / 460 V				
		16 A	HGM50E 2PT4S0000C 00016F	HGM50E 3PT4S0000C 00016F	HGM50E 4PT4S0000C 00016F	HGM50E 4PLT4S0000C 00016F
20 A		HGM50E 2PT4S0000C 00020F	HGM50E 3PT4S0000C 00020F	HGM50E 4PT4S0000C 00020F	HGM50E 4PLT4S0000C 00020F	
25 A		HGM50E 2PT4S0000C 00025F	HGM50E 3PT4S0000C 00025F	HGM50E 4PT4S0000C 00025F	HGM50E 4PLT4S0000C 00025F	
32 A		HGM50E 2PT4S0000C 00032F	HGM50E 3PT4S0000C 00032F	HGM50E 4PT4S0000C 00032F	HGM50E 4PLT4S0000C 00032F	
40 A		HGM50E 2PT4S0000C 00040F	HGM50E 3PT4S0000C 00040F	HGM50E 4PT4S0000C 00040F	HGM50E 4PLT4S0000C 00040F	
50 A		HGM50E 2PT4S0000C 00050F	HGM50E 3PT4S0000C 00050F	HGM50E 4PT4S0000C 00050F	HGM50E 4PLT4S0000C 00050F	
HGM50S...20 kA / 460 V						
16 A		HGM50S 2PT4S0000C 00016F	HGM50S 3PT4S0000C 00016F	HGM50S 4PT4S0000C 00016F	HGM50S 4PLT4S0000C 00016F	
20 A		HGM50S 2PT4S0000C 00020F	HGM50S 3PT4S0000C 00020F	HGM50S 4PT4S0000C 00020F	HGM50S 4PLT4S0000C 00020F	
25 A		HGM50S 2PT4S0000C 00025F	HGM50S 3PT4S0000C 00025F	HGM50S 4PT4S0000C 00025F	HGM50S 4PLT4S0000C 00025F	
32 A		HGM50S 2PT4S0000C 00032F	HGM50S 3PT4S0000C 00032F	HGM50S 4PT4S0000C 00032F	HGM50S 4PLT4S0000C 00032F	
40 A		HGM50S 2PT4S0000C 00040F	HGM50S 3PT4S0000C 00040F	HGM50S 4PT4S0000C 00040F	HGM50S 4PLT4S0000C 00040F	
50 A		HGM50S 2PT4S0000C 00050F	HGM50S 3PT4S0000C 00050F	HGM50S 4PT4S0000C 00050F	HGM50S 4PLT4S0000C 00050F	
HGM50H...38 kA / 460 V						
16 A		HGM50H 2PT4S0000C 00016F	HGM50H 3PT4S0000C 00016F	HGM50H 4PT4S0000C 00016F	HGM50H 4PLT4S0000C 00016F	
20 A		HGM50H 2PT4S0000C 00020F	HGM50H 3PT4S0000C 00020F	HGM50H 4PT4S0000C 00020F	HGM50H 4PLT4S0000C 00020F	
25 A		HGM50H 2PT4S0000C 00025F	HGM50H 3PT4S0000C 00025F	HGM50H 4PT4S0000C 00025F	HGM50H 4PLT4S0000C 00025F	
32 A		HGM50H 2PT4S0000C 00032F	HGM50H 3PT4S0000C 00032F	HGM50H 4PT4S0000C 00032F	HGM50H 4PLT4S0000C 00032F	
40 A		HGM50H 2PT4S0000C 00040F	HGM50H 3PT4S0000C 00040F	HGM50H 4PT4S0000C 00040F	HGM50H 4PLT4S0000C 00040F	
50 A		HGM50H 2PT4S0000C 00050F	HGM50H 3PT4S0000C 00050F	HGM50H 4PT4S0000C 00050F	HGM50H 4PLT4S0000C 00050F	
HGM50L...55 kA / 460 V						
16 A		HGM50L 2PT4S0000C 00016F	HGM50L 3PT4S0000C 00016F	HGM50L 4PT4S0000C 00016F	HGM50L 4PLT4S0000C 00016F	
20 A		HGM50L 2PT4S0000C 00020F	HGM50L 3PT4S0000C 00020F	HGM50L 4PT4S0000C 00020F	HGM50L 4PLT4S0000C 00020F	
25 A		HGM50L 2PT4S0000C 00025F	HGM50L 3PT4S0000C 00025F	HGM50L 4PT4S0000C 00025F	HGM50L 4PLT4S0000C 00025F	
32 A		HGM50L 2PT4S0000C 00032F	HGM50L 3PT4S0000C 00032F	HGM50L 4PT4S0000C 00032F	HGM50L 4PLT4S0000C 00032F	
40 A		HGM50L 2PT4S0000C 00040F	HGM50L 3PT4S0000C 00040F	HGM50L 4PT4S0000C 00040F	HGM50L 4PLT4S0000C 00040F	
50 A	HGM50L 2PT4S0000C 00050F	HGM50L 3PT4S0000C 00050F	HGM50L 4PT4S0000C 00050F	HGM50L 4PLT4S0000C 00050F		


Ordering Information

HGM Type Molded Case Circuit Breakers (MCCB)

- Normal type/Front connection
- Except for accessory, Based on ambient temperature 40 °C and frequency 50/60 Hz

Adjustable (Thermal Adjustable / Instantaneous Fixing)

60 AF	In	2 Pole	3 Pole	4 Pole (RSTN)	4 Pole (NRST)
	HGM60E...16 kA / 460 V				
	16 A	HGM60E 2PT4S0000C 00016F	HGM60E 3PT4S0000C 00016F	HGM60E 4PT4S0000C 00016F	HGM60E 4PLT4S0000C 00016F
	20 A	HGM60E 2PT4S0000C 00020F	HGM60E 3PT4S0000C 00020F	HGM60E 4PT4S0000C 00020F	HGM60E 4PLT4S0000C 00020F
	25 A	HGM60E 2PT4S0000C 00025F	HGM60E 3PT4S0000C 00025F	HGM60E 4PT4S0000C 00025F	HGM60E 4PLT4S0000C 00025F
	32 A	HGM60E 2PT4S0000C 00032F	HGM60E 3PT4S0000C 00032F	HGM60E 4PT4S0000C 00032F	HGM60E 4PLT4S0000C 00032F
	40 A	HGM60E 2PT4S0000C 00040F	HGM60E 3PT4S0000C 00040F	HGM60E 4PT4S0000C 00040F	HGM60E 4PLT4S0000C 00040F
	50 A	HGM60E 2PT4S0000C 00050F	HGM60E 3PT4S0000C 00050F	HGM60E 4PT4S0000C 00050F	HGM60E 4PLT4S0000C 00050F
	63 A	HGM60E 2PT4S0000C 00063F	HGM60E 3PT4S0000C 00063F	HGM60E 4PT4S0000C 00063F	HGM60E 4PLT4S0000C 00063F
	HGM60S...20 kA / 460 V				
	16 A	HGM60S 2PT4S0000C 00016F	HGM60S 3PT4S0000C 00016F	HGM60S 4PT4S0000C 00016F	HGM60S 4PLT4S0000C 00016F
	20 A	HGM60S 2PT4S0000C 00020F	HGM60S 3PT4S0000C 00020F	HGM60S 4PT4S0000C 00020F	HGM60S 4PLT4S0000C 00020F
	25 A	HGM60S 2PT4S0000C 00025F	HGM60S 3PT4S0000C 00025F	HGM60S 4PT4S0000C 00025F	HGM60S 4PLT4S0000C 00025F
	32 A	HGM60S 2PT4S0000C 00032F	HGM60S 3PT4S0000C 00032F	HGM60S 4PT4S0000C 00032F	HGM60S 4PLT4S0000C 00032F
	40 A	HGM60S 2PT4S0000C 00040F	HGM60S 3PT4S0000C 00040F	HGM60S 4PT4S0000C 00040F	HGM60S 4PLT4S0000C 00040F
50 A	HGM60S 2PT4S0000C 00050F	HGM60S 3PT4S0000C 00050F	HGM60S 4PT4S0000C 00050F	HGM60S 4PLT4S0000C 00050F	
63 A	HGM60S 2PT4S0000C 00063F	HGM60S 3PT4S0000C 00063F	HGM60S 4PT4S0000C 00063F	HGM60S 4PLT4S0000C 00063F	
HGM60H...26 kA / 460 V					
16 A	HGM60H 2PT4S0000C 00016F	HGM60H 3PT4S0000C 00016F	HGM60H 4PT4S0000C 00016F	HGM60H 4PLT4S0000C 00016F	
20 A	HGM60H 2PT4S0000C 00020F	HGM60H 3PT4S0000C 00020F	HGM60H 4PT4S0000C 00020F	HGM60H 4PLT4S0000C 00020F	
25 A	HGM60H 2PT4S0000C 00025F	HGM60H 3PT4S0000C 00025F	HGM60H 4PT4S0000C 00025F	HGM60H 4PLT4S0000C 00025F	
32 A	HGM60H 2PT4S0000C 00032F	HGM60H 3PT4S0000C 00032F	HGM60H 4PT4S0000C 00032F	HGM60H 4PLT4S0000C 00032F	
40 A	HGM60H 2PT4S0000C 00040F	HGM60H 3PT4S0000C 00040F	HGM60H 4PT4S0000C 00040F	HGM60H 4PLT4S0000C 00040F	
50 A	HGM60H 2PT4S0000C 00050F	HGM60H 3PT4S0000C 00050F	HGM60H 4PT4S0000C 00050F	HGM60H 4PLT4S0000C 00050F	
63 A	HGM60H 2PT4S0000C 00063F	HGM60H 3PT4S0000C 00063F	HGM60H 4PT4S0000C 00063F	HGM60H 4PLT4S0000C 00063F	
HGM60L...30 kA / 460 V					
16 A	HGM60L 2PT4S0000C 00016F	HGM60L 3PT4S0000C 00016F	HGM60L 4PT4S0000C 00016F	HGM60L 4PLT4S0000C 00016F	
20 A	HGM60L 2PT4S0000C 00020F	HGM60L 3PT4S0000C 00020F	HGM60L 4PT4S0000C 00020F	HGM60L 4PLT4S0000C 00020F	
25 A	HGM60L 2PT4S0000C 00025F	HGM60L 3PT4S0000C 00025F	HGM60L 4PT4S0000C 00025F	HGM60L 4PLT4S0000C 00025F	
32 A	HGM60L 2PT4S0000C 00032F	HGM60L 3PT4S0000C 00032F	HGM60L 4PT4S0000C 00032F	HGM60L 4PLT4S0000C 00032F	
40 A	HGM60L 2PT4S0000C 00040F	HGM60L 3PT4S0000C 00040F	HGM60L 4PT4S0000C 00040F	HGM60L 4PLT4S0000C 00040F	
50 A	HGM60L 2PT4S0000C 00050F	HGM60L 3PT4S0000C 00050F	HGM60L 4PT4S0000C 00050F	HGM60L 4PLT4S0000C 00050F	
63 A	HGM60L 2PT4S0000C 00063F	HGM60L 3PT4S0000C 00063F	HGM60L 4PT4S0000C 00063F	HGM60L 4PLT4S0000C 00063F	


100 AF	In	2 Pole	3 Pole	4 Pole (RSTN)	4 Pole (NRST)
	HGM100E...16 kA / 460 V				
	16 A	HGM100E 2PT4S0000C 00016F	HGM100E 3PT4S0000C 00016F	HGM100E 4PT4S0000C 00016F	HGM100E 4PLT4S0000C 00016F
	20 A	HGM100E 2PT4S0000C 00020F	HGM100E 3PT4S0000C 00020F	HGM100E 4PT4S0000C 00020F	HGM100E 4PLT4S0000C 00020F
	25 A	HGM100E 2PT4S0000C 00025F	HGM100E 3PT4S0000C 00025F	HGM100E 4PT4S0000C 00025F	HGM100E 4PLT4S0000C 00025F
	32 A	HGM100E 2PT4S0000C 00032F	HGM100E 3PT4S0000C 00032F	HGM100E 4PT4S0000C 00032F	HGM100E 4PLT4S0000C 00032F
	40 A	HGM100E 2PT4S0000C 00040F	HGM100E 3PT4S0000C 00040F	HGM100E 4PT4S0000C 00040F	HGM100E 4PLT4S0000C 00040F
	50 A	HGM100E 2PT4S0000C 00050F	HGM100E 3PT4S0000C 00050F	HGM100E 4PT4S0000C 00050F	HGM100E 4PLT4S0000C 00050F
	63 A	HGM100E 2PT4S0000C 00063F	HGM100E 3PT4S0000C 00063F	HGM100E 4PT4S0000C 00063F	HGM100E 4PLT4S0000C 00063F
	75 A	HGM100E 2PT4S0000C 00075F	HGM100E 3PT4S0000C 00075F	HGM100E 4PT4S0000C 00075F	HGM100E 4PLT4S0000C 00075F
	80 A	HGM100E 2PT4S0000C 00080F	HGM100E 3PT4S0000C 00080F	HGM100E 4PT4S0000C 00080F	HGM100E 4PLT4S0000C 00080F
	100 A	HGM100E 2PT4S0000C 00100F	HGM100E 3PT4S0000C 00100F	HGM100E 4PT4S0000C 00100F	HGM100E 4PLT4S0000C 00100F


Ordering Information

HGM Type Molded Case Circuit Breakers (MCCB)

- Normal type/Front connection
- Except for accessory, Based on ambient temperature 40 °C and frequency 50/60 Hz

Adjustable (Thermal Adjustable / Instantaneous Fixing)

125 AF	In	2 Pole	3 Pole	4 Pole (RSTN)	4 Pole (NRST)
	HGM125S...26 kA / 460 V				
	16 A	HGM125S 2PT4S0000C 00016F	HGM125S 3PT4S0000C 00016F	HGM125S 4PT4S0000C 00016F	HGM125S 4PLT4S0000C 00016F
	20 A	HGM125S 2PT4S0000C 00020F	HGM125S 3PT4S0000C 00020F	HGM125S 4PT4S0000C 00020F	HGM125S 4PLT4S0000C 00020F
	25 A	HGM125S 2PT4S0000C 00025F	HGM125S 3PT4S0000C 00025F	HGM125S 4PT4S0000C 00025F	HGM125S 4PLT4S0000C 00025F
	32 A	HGM125S 2PT4S0000C 00032F	HGM125S 3PT4S0000C 00032F	HGM125S 4PT4S0000C 00032F	HGM125S 4PLT4S0000C 00032F
	40 A	HGM125S 2PT4S0000C 00040F	HGM125S 3PT4S0000C 00040F	HGM125S 4PT4S0000C 00040F	HGM125S 4PLT4S0000C 00040F
	50 A	HGM125S 2PT4S0000C 00050F	HGM125S 3PT4S0000C 00050F	HGM125S 4PT4S0000C 00050F	HGM125S 4PLT4S0000C 00050F
	63 A	HGM125S 2PT4S0000C 00063F	HGM125S 3PT4S0000C 00063F	HGM125S 4PT4S0000C 00063F	HGM125S 4PLT4S0000C 00063F
	75 A	HGM125S 2PT4S0000C 00075F	HGM125S 3PT4S0000C 00075F	HGM125S 4PT4S0000C 00075F	HGM125S 4PLT4S0000C 00075F
	80 A	HGM125S 2PT4S0000C 00080F	HGM125S 3PT4S0000C 00080F	HGM125S 4PT4S0000C 00080F	HGM125S 4PLT4S0000C 00080F
	100 A	HGM125S 2PT4S0000C 00100F	HGM125S 3PT4S0000C 00100F	HGM125S 4PT4S0000C 00100F	HGM125S 4PLT4S0000C 00100F
	125 A	HGM125S 2PT4S0000C 00125F	HGM125S 3PT4S0000C 00125F	HGM125S 4PT4S0000C 00125F	HGM125S 4PLT4S0000C 00125F
	HGM125H...38 kA / 460 V				
	16 A	HGM125H 2PT4S0000C 00016F	HGM125H 3PT4S0000C 00016F	HGM125H 4PT4S0000C 00016F	HGM125H 4PLT4S0000C 00016F
20 A	HGM125H 2PT4S0000C 00020F	HGM125H 3PT4S0000C 00020F	HGM125H 4PT4S0000C 00020F	HGM125H 4PLT4S0000C 00020F	
25 A	HGM125H 2PT4S0000C 00025F	HGM125H 3PT4S0000C 00025F	HGM125H 4PT4S0000C 00025F	HGM125H 4PLT4S0000C 00025F	
32 A	HGM125H 2PT4S0000C 00032F	HGM125H 3PT4S0000C 00032F	HGM125H 4PT4S0000C 00032F	HGM125H 4PLT4S0000C 00032F	
40 A	HGM125H 2PT4S0000C 00040F	HGM125H 3PT4S0000C 00040F	HGM125H 4PT4S0000C 00040F	HGM125H 4PLT4S0000C 00040F	
50 A	HGM125H 2PT4S0000C 00050F	HGM125H 3PT4S0000C 00050F	HGM125H 4PT4S0000C 00050F	HGM125H 4PLT4S0000C 00050F	
63 A	HGM125H 2PT4S0000C 00063F	HGM125H 3PT4S0000C 00063F	HGM125H 4PT4S0000C 00063F	HGM125H 4PLT4S0000C 00063F	
75 A	HGM125H 2PT4S0000C 00075F	HGM125H 3PT4S0000C 00075F	HGM125H 4PT4S0000C 00075F	HGM125H 4PLT4S0000C 00075F	
80 A	HGM125H 2PT4S0000C 00080F	HGM125H 3PT4S0000C 00080F	HGM125H 4PT4S0000C 00080F	HGM125H 4PLT4S0000C 00080F	
100 A	HGM125H 2PT4S0000C 00100F	HGM125H 3PT4S0000C 00100F	HGM125H 4PT4S0000C 00100F	HGM125H 4PLT4S0000C 00100F	
125 A	HGM125H 2PT4S0000C 00125F	HGM125H 3PT4S0000C 00125F	HGM125H 4PT4S0000C 00125F	HGM125H 4PLT4S0000C 00125F	
HGM125L...55 kA / 460 V					
16 A	HGM125L 2PT4S0000C 00016F	HGM125L 3PT4S0000C 00016F	HGM125L 4PT4S0000C 00016F	HGM125L 4PLT4S0000C 00016F	
20 A	HGM125L 2PT4S0000C 00020F	HGM125L 3PT4S0000C 00020F	HGM125L 4PT4S0000C 00020F	HGM125L 4PLT4S0000C 00020F	
25 A	HGM125L 2PT4S0000C 00025F	HGM125L 3PT4S0000C 00025F	HGM125L 4PT4S0000C 00025F	HGM125L 4PLT4S0000C 00025F	
32 A	HGM125L 2PT4S0000C 00032F	HGM125L 3PT4S0000C 00032F	HGM125L 4PT4S0000C 00032F	HGM125L 4PLT4S0000C 00032F	
40 A	HGM125L 2PT4S0000C 00040F	HGM125L 3PT4S0000C 00040F	HGM125L 4PT4S0000C 00040F	HGM125L 4PLT4S0000C 00040F	
50 A	HGM125L 2PT4S0000C 00050F	HGM125L 3PT4S0000C 00050F	HGM125L 4PT4S0000C 00050F	HGM125L 4PLT4S0000C 00050F	
63 A	HGM125L 2PT4S0000C 00063F	HGM125L 3PT4S0000C 00063F	HGM125L 4PT4S0000C 00063F	HGM125L 4PLT4S0000C 00063F	
75 A	HGM125L 2PT4S0000C 00075F	HGM125L 3PT4S0000C 00075F	HGM125L 4PT4S0000C 00075F	HGM125L 4PLT4S0000C 00075F	
80 A	HGM125L 2PT4S0000C 00080F	HGM125L 3PT4S0000C 00080F	HGM125L 4PT4S0000C 00080F	HGM125L 4PLT4S0000C 00080F	
100 A	HGM125L 2PT4S0000C 00100F	HGM125L 3PT4S0000C 00100F	HGM125L 4PT4S0000C 00100F	HGM125L 4PLT4S0000C 00100F	
125 A	HGM125L 2PT4S0000C 00125F	HGM125L 3PT4S0000C 00125F	HGM125L 4PT4S0000C 00125F	HGM125L 4PLT4S0000C 00125F	


160 AF	In	2 Pole	3 Pole	4 Pole (RSTN)	4 Pole (NRST)
	HGM160E...20 kA / 460 V				
	100 A	HGM160E 2PT4S0000C 00100F	HGM160E 3PT4S0000C 00100F	HGM160E 4PT4S0000C 00100F	HGM160E 4PLT4S0000C 00100F
	125 A	HGM160E 2PT4S0000C 00125F	HGM160E 3PT4S0000C 00125F	HGM160E 4PT4S0000C 00125F	HGM160E 4PLT4S0000C 00125F
	150 A	HGM160E 2PT4S0000C 00150F	HGM160E 3PT4S0000C 00150F	HGM160E 4PT4S0000C 00150F	HGM160E 4PLT4S0000C 00150F
	160 A	HGM160E 2PT4S0000C 00160F	HGM160E 3PT4S0000C 00160F	HGM160E 4PT4S0000C 00160F	HGM160E 4PLT4S0000C 00160F
HGM160S...26 kA / 460 V					
100 A	HGM160S 2PT4S0000C 00100F	HGM160S 3PT4S0000C 00100F	HGM160S 4PT4S0000C 00100F	HGM160S 4PLT4S0000C 00100F	
125 A	HGM160S 2PT4S0000C 00125F	HGM160S 3PT4S0000C 00125F	HGM160S 4PT4S0000C 00125F	HGM160S 4PLT4S0000C 00125F	
150 A	HGM160S 2PT4S0000C 00150F	HGM160S 3PT4S0000C 00150F	HGM160S 4PT4S0000C 00150F	HGM160S 4PLT4S0000C 00150F	
160 A	HGM160S 2PT4S0000C 00160F	HGM160S 3PT4S0000C 00160F	HGM160S 4PT4S0000C 00160F	HGM160S 4PLT4S0000C 00160F	


Ordering Information


HGM Type Molded Case Circuit Breakers (MCCB)

- Normal type/Front connection
- Except for accessory, Based on ambient temperature 40 °C and frequency 50/60 Hz



Adjustable (Thermal Adjustable / Instantaneous Fixing)

400 AF	In	2 Pole	3 Pole	4 Pole (RSTN)	4 Pole (NRST)
	HGM400E...38 kA / 460 V				
	250 A	HGM400E 2PT4S0000C 00250F	HGM400E 3PT4S0000C 00250F	HGM400E 4PT4S0000C 00250F	HGM400E 4PLT4S0000C 00250F
	300 A	HGM400E 2PT4S0000C 00300F	HGM400E 3PT4S0000C 00300F	HGM400E 4PT4S0000C 00300F	HGM400E 4PLT4S0000C 00300F
	350 A	HGM400E 2PT4S0000C 00350F	HGM400E 3PT4S0000C 00350F	HGM400E 4PT4S0000C 00350F	HGM400E 4PLT4S0000C 00350F
	400 A	HGM400E 2PT4S0000C 00400F	HGM400E 3PT4S0000C 00400F	HGM400E 4PT4S0000C 00400F	HGM400E 4PLT4S0000C 00400F
	HGM400S...50 kA / 460 V				
	250 A	HGM400S 2PT4S0000C 00250F	HGM400S 3PT4S0000C 00250F	HGM400S 4PT4S0000C 00250F	HGM400S 4PLT4S0000C 00250F
	300 A	HGM400S 2PT4S0000C 00300F	HGM400S 3PT4S0000C 00300F	HGM400S 4PT4S0000C 00300F	HGM400S 4PLT4S0000C 00300F
	350 A	HGM400S 2PT4S0000C 00350F	HGM400S 3PT4S0000C 00350F	HGM400S 4PT4S0000C 00350F	HGM400S 4PLT4S0000C 00350F
	400 A	HGM400S 2PT4S0000C 00400F	HGM400S 3PT4S0000C 00400F	HGM400S 4PT4S0000C 00400F	HGM400S 4PLT4S0000C 00400F
	HGM400H...70 kA / 460 V				
	250 A	HGM400H 2PT4S0000C 00250F	HGM400H 3PT4S0000C 00250F	HGM400H 4PT4S0000C 00250F	HGM400H 4PLT4S0000C 00250F
	300 A	HGM400H 2PT4S0000C 00300F	HGM400H 3PT4S0000C 00300F	HGM400H 4PT4S0000C 00300F	HGM400H 4PLT4S0000C 00300F
	350 A	HGM400H 2PT4S0000C 00350F	HGM400H 3PT4S0000C 00350F	HGM400H 4PT4S0000C 00350F	HGM400H 4PLT4S0000C 00350F
	400 A	HGM400H 2PT4S0000C 00400F	HGM400H 3PT4S0000C 00400F	HGM400H 4PT4S0000C 00400F	HGM400H 4PLT4S0000C 00400F
	HGM400L...85 kA / 460 V				
250 A	HGM400L 2PT4S0000C 00250F	HGM400L 3PT4S0000C 00250F	HGM400L 4PT4S0000C 00250F	HGM400L 4PLT4S0000C 00250F	
300 A	HGM400L 2PT4S0000C 00300F	HGM400L 3PT4S0000C 00300F	HGM400L 4PT4S0000C 00300F	HGM400L 4PLT4S0000C 00300F	
350 A	HGM400L 2PT4S0000C 00350F	HGM400L 3PT4S0000C 00350F	HGM400L 4PT4S0000C 00350F	HGM400L 4PLT4S0000C 00350F	
400 A	HGM400L 2PT4S0000C 00400F	HGM400L 3PT4S0000C 00400F	HGM400L 4PT4S0000C 00400F	HGM400L 4PLT4S0000C 00400F	

630 AF	In	2 Pole	3 Pole	4 Pole (RSTN)	4 Pole (NRST)
	HGM630E...38 kA / 460 V				
	500 A	HGM630E 2PT4S0000C 00500F	HGM630E 3PT4S0000C 00500F	HGM630E 4PT4S0000C 00500F	HGM630E 4PLT4S0000C 00500F
	630 A	HGM630E 2PT4S0000C 00630F	HGM630E 3PT4S0000C 00630F	HGM630E 4PT4S0000C 00630F	HGM630E 4PLT4S0000C 00630F
	HGM630S...50 kA / 460 V				
	500 A	HGM630S 2PT4S0000C 00500F	HGM630S 3PT4S0000C 00500F	HGM630S 4PT4S0000C 00500F	HGM630S 4PLT4S0000C 00500F
	630 A	HGM630S 2PT4S0000C 00630F	HGM630S 3PT4S0000C 00630F	HGM630S 4PT4S0000C 00630F	HGM630S 4PLT4S0000C 00630F
	HGM630H...70 kA / 460 V				
	500 A	HGM630H 2PT4S0000C 00500F	HGM630H 3PT4S0000C 00500F	HGM630H 4PT4S0000C 00500F	HGM630H 4PLT4S0000C 00500F
	630 A	HGM630H 2PT4S0000C 00630F	HGM630H 3PT4S0000C 00630F	HGM630H 4PT4S0000C 00630F	HGM630H 4PLT4S0000C 00630F
	HGM630L...85 kA / 460 V				
	500 A	HGM630L 2PT4S0000C 00500F	HGM630L 3PT4S0000C 00500F	HGM630L 4PT4S0000C 00500F	HGM630L 4PLT4S0000C 00500F
	630 A	HGM630L 2PT4S0000C 00630F	HGM630L 3PT4S0000C 00630F	HGM630L 4PT4S0000C 00630F	HGM630L 4PLT4S0000C 00630F

800 AF	In	2 Pole	3 Pole	4 Pole (RSTN)	4 Pole (NRST)
	HGM800S...50 kA / 460 V				
	700 A	HGM800S 2PT4S0000C 00700F	HGM800S 3PT4S0000C 00700F	HGM800S 4PT4S0000C 00700F	HGM800S 4PLT4S0000C 00700F
	800 A	HGM800S 2PT4S0000C 00800F	HGM800S 3PT4S0000C 00800F	HGM800S 4PT4S0000C 00800F	HGM800S 4PLT4S0000C 00800F
	HGM800H...70 kA / 460 V				
	700 A	HGM800H 2PT4S0000C 00700F	HGM800H 3PT4S0000C 00700F	HGM800H 4PT4S0000C 00700F	HGM800H 4PLT4S0000C 00700F
	800 A	HGM800H 2PT4S0000C 00800F	HGM800H 3PT4S0000C 00800F	HGM800H 4PT4S0000C 00800F	HGM800H 4PLT4S0000C 00800F
	HGM800L...85 kA / 460 V				
	700 A	HGM800L 2PT4S0000C 00700F	HGM800L 3PT4S0000C 00700F	HGM800L 4PT4S0000C 00700F	HGM800L 4PLT4S0000C 00700F
	800 A	HGM800L 2PT4S0000C 00800F	HGM800L 3PT4S0000C 00800F	HGM800L 4PT4S0000C 00800F	HGM800L 4PLT4S0000C 00800F

Fixing (Thermal Fixing / Instantaneous Fixing)

30AF	In	2 Pole	3 Pole	4 Pole (RSTN)	4 Pole (NRST)	
	HGM30E...16 kA / 460 V					
	16 A	HGM30E 2PT4S0000C 00016	HGM30E 3PT4S0000C 00016	HGM30E 4PT4S0000C 00016	HGM30E 4PLT4S0000C 00016	
	20 A	HGM30E 2PT4S0000C 00020	HGM30E 3PT4S0000C 00020	HGM30E 4PT4S0000C 00020	HGM30E 4PLT4S0000C 00020	
	25 A	HGM30E 2PT4S0000C 00025	HGM30E 3PT4S0000C 00025	HGM30E 4PT4S0000C 00025	HGM30E 4PLT4S0000C 00025	
	32 A	HGM30E 2PT4S0000C 00032	HGM30E 3PT4S0000C 00032	HGM30E 4PT4S0000C 00032	HGM30E 4PLT4S0000C 00032	
	HGM30S...20 kA / 460 V					
	16 A	HGM30S 2PT4S0000C 00016	HGM30S 3PT4S0000C 00016	HGM30S 4PT4S0000C 00016	HGM30S 4PLT4S0000C 00016	
	20 A	HGM30S 2PT4S0000C 00020	HGM30S 3PT4S0000C 00020	HGM30S 4PT4S0000C 00020	HGM30S 4PLT4S0000C 00020	
	25 A	HGM30S 2PT4S0000C 00025	HGM30S 3PT4S0000C 00025	HGM30S 4PT4S0000C 00025	HGM30S 4PLT4S0000C 00025	
	32 A	HGM30S 2PT4S0000C 00032	HGM30S 3PT4S0000C 00032	HGM30S 4PT4S0000C 00032	HGM30S 4PLT4S0000C 00032	
	HGM50E...16 kA / 460 V					
		16 A	HGM50E 2PT4S0000C 00016	HGM50E 3PT4S0000C 00016	HGM50E 4PT4S0000C 00016	HGM50E 4PLT4S0000C 00016
		20 A	HGM50E 2PT4S0000C 00020	HGM50E 3PT4S0000C 00020	HGM50E 4PT4S0000C 00020	HGM50E 4PLT4S0000C 00020
		25 A	HGM50E 2PT4S0000C 00025	HGM50E 3PT4S0000C 00025	HGM50E 4PT4S0000C 00025	HGM50E 4PLT4S0000C 00025
		32 A	HGM50E 2PT4S0000C 00032	HGM50E 3PT4S0000C 00032	HGM50E 4PT4S0000C 00032	HGM50E 4PLT4S0000C 00032
		40 A	HGM50E 2PT4S0000C 00040	HGM50E 3PT4S0000C 00040	HGM50E 4PT4S0000C 00040	HGM50E 4PLT4S0000C 00040
50 A		HGM50E 2PT4S0000C 00050	HGM50E 3PT4S0000C 00050	HGM50E 4PT4S0000C 00050	HGM50E 4PLT4S0000C 00050	
HGM50S...20 kA / 460 V						
16 A		HGM50S 2PT4S0000C 00016	HGM50S 3PT4S0000C 00016	HGM50S 4PT4S0000C 00016	HGM50S 4PLT4S0000C 00016	
20 A		HGM50S 2PT4S0000C 00020	HGM50S 3PT4S0000C 00020	HGM50S 4PT4S0000C 00020	HGM50S 4PLT4S0000C 00020	
25 A		HGM50S 2PT4S0000C 00025	HGM50S 3PT4S0000C 00025	HGM50S 4PT4S0000C 00025	HGM50S 4PLT4S0000C 00025	
32 A		HGM50S 2PT4S0000C 00032	HGM50S 3PT4S0000C 00032	HGM50S 4PT4S0000C 00032	HGM50S 4PLT4S0000C 00032	
40 A		HGM50S 2PT4S0000C 00040	HGM50S 3PT4S0000C 00040	HGM50S 4PT4S0000C 00040	HGM50S 4PLT4S0000C 00040	
50 A		HGM50S 2PT4S0000C 00050	HGM50S 3PT4S0000C 00050	HGM50S 4PT4S0000C 00050	HGM50S 4PLT4S0000C 00050	
HGM50H...38 kA / 460 V						
16 A		HGM50H 2PT4S0000C 00016	HGM50H 3PT4S0000C 00016	HGM50H 4PT4S0000C 00016	HGM50H 4PLT4S0000C 00016	
20 A		HGM50H 2PT4S0000C 00020	HGM50H 3PT4S0000C 00020	HGM50H 4PT4S0000C 00020	HGM50H 4PLT4S0000C 00020	
25 A	HGM50H 2PT4S0000C 00025	HGM50H 3PT4S0000C 00025	HGM50H 4PT4S0000C 00025	HGM50H 4PLT4S0000C 00025		
32 A	HGM50H 2PT4S0000C 00032	HGM50H 3PT4S0000C 00032	HGM50H 4PT4S0000C 00032	HGM50H 4PLT4S0000C 00032		
40 A	HGM50H 2PT4S0000C 00040	HGM50H 3PT4S0000C 00040	HGM50H 4PT4S0000C 00040	HGM50H 4PLT4S0000C 00040		
50 A	HGM50H 2PT4S0000C 00050	HGM50H 3PT4S0000C 00050	HGM50H 4PT4S0000C 00050	HGM50H 4PLT4S0000C 00050		
HGM50L...55 kA / 460 V						
16 A	HGM50L 2PT4S0000C 00016	HGM50L 3PT4S0000C 00016	HGM50L 4PT4S0000C 00016	HGM50L 4PLT4S0000C 00016		
20 A	HGM50L 2PT4S0000C 00020	HGM50L 3PT4S0000C 00020	HGM50L 4PT4S0000C 00020	HGM50L 4PLT4S0000C 00020		
25 A	HGM50L 2PT4S0000C 00025	HGM50L 3PT4S0000C 00025	HGM50L 4PT4S0000C 00025	HGM50L 4PLT4S0000C 00025		
32 A	HGM50L 2PT4S0000C 00032	HGM50L 3PT4S0000C 00032	HGM50L 4PT4S0000C 00032	HGM50L 4PLT4S0000C 00032		
40 A	HGM50L 2PT4S0000C 00040	HGM50L 3PT4S0000C 00040	HGM50L 4PT4S0000C 00040	HGM50L 4PLT4S0000C 00040		
50 A	HGM50L 2PT4S0000C 00050	HGM50L 3PT4S0000C 00050	HGM50L 4PT4S0000C 00050	HGM50L 4PLT4S0000C 00050		


Ordering Information

HGM Type Molded Case Circuit Breakers (MCCB)

- Normal type/Front connection
- Except for accessory, Based on ambient temperature 40 °C and frequency 50/60 Hz

Fixing (Thermal Fixing / Instantaneous Fixing)

60 AF	In	2 Pole	3 Pole	4 Pole (RSTN)	4 Pole (NRST)
	HGM60E...16 kA / 460 V				
	16 A	HGM60E 2PT4S0000C 00016	HGM60E 3PT4S0000C 00016	HGM60E 4PT4S0000C 00016	HGM60E 4PLT4S0000C 00016
	20 A	HGM60E 2PT4S0000C 00020	HGM60E 3PT4S0000C 00020	HGM60E 4PT4S0000C 00020	HGM60E 4PLT4S0000C 00020
	25 A	HGM60E 2PT4S0000C 00025	HGM60E 3PT4S0000C 00025	HGM60E 4PT4S0000C 00025	HGM60E 4PLT4S0000C 00025
	32 A	HGM60E 2PT4S0000C 00032	HGM60E 3PT4S0000C 00032	HGM60E 4PT4S0000C 00032	HGM60E 4PLT4S0000C 00032
	40 A	HGM60E 2PT4S0000C 00040	HGM60E 3PT4S0000C 00040	HGM60E 4PT4S0000C 00040	HGM60E 4PLT4S0000C 00040
	50 A	HGM60E 2PT4S0000C 00050	HGM60E 3PT4S0000C 00050	HGM60E 4PT4S0000C 00050	HGM60E 4PLT4S0000C 00050
	63 A	HGM60E 2PT4S0000C 00063	HGM60E 3PT4S0000C 00063	HGM60E 4PT4S0000C 00063	HGM60E 4PLT4S0000C 00063
	HGM60S...20 kA / 460 V				
	16 A	HGM60S 2PT4S0000C 00016	HGM60S 3PT4S0000C 00016	HGM60S 4PT4S0000C 00016	HGM60S 4PLT4S0000C 00016
	20 A	HGM60S 2PT4S0000C 00020	HGM60S 3PT4S0000C 00020	HGM60S 4PT4S0000C 00020	HGM60S 4PLT4S0000C 00020
	25 A	HGM60S 2PT4S0000C 00025	HGM60S 3PT4S0000C 00025	HGM60S 4PT4S0000C 00025	HGM60S 4PLT4S0000C 00025
	32 A	HGM60S 2PT4S0000C 00032	HGM60S 3PT4S0000C 00032	HGM60S 4PT4S0000C 00032	HGM60S 4PLT4S0000C 00032
40 A	HGM60S 2PT4S0000C 00040	HGM60S 3PT4S0000C 00040	HGM60S 4PT4S0000C 00040	HGM60S 4PLT4S0000C 00040	
50 A	HGM60S 2PT4S0000C 00050	HGM60S 3PT4S0000C 00050	HGM60S 4PT4S0000C 00050	HGM60S 4PLT4S0000C 00050	
63 A	HGM60S 2PT4S0000C 00063	HGM60S 3PT4S0000C 00063	HGM60S 4PT4S0000C 00063	HGM60S 4PLT4S0000C 00063	
HGM60H...26 kA / 460 V					
16 A	HGM60H 2PT4S0000C 00016	HGM60H 3PT4S0000C 00016	HGM60H 4PT4S0000C 00016	HGM60H 4PLT4S0000C 00016	
20 A	HGM60H 2PT4S0000C 00020	HGM60H 3PT4S0000C 00020	HGM60H 4PT4S0000C 00020	HGM60H 4PLT4S0000C 00020	
25 A	HGM60H 2PT4S0000C 00025	HGM60H 3PT4S0000C 00025	HGM60H 4PT4S0000C 00025	HGM60H 4PLT4S0000C 00025	
32 A	HGM60H 2PT4S0000C 00032	HGM60H 3PT4S0000C 00032	HGM60H 4PT4S0000C 00032	HGM60H 4PLT4S0000C 00032	
40 A	HGM60H 2PT4S0000C 00040	HGM60H 3PT4S0000C 00040	HGM60H 4PT4S0000C 00040	HGM60H 4PLT4S0000C 00040	
50 A	HGM60H 2PT4S0000C 00050	HGM60H 3PT4S0000C 00050	HGM60H 4PT4S0000C 00050	HGM60H 4PLT4S0000C 00050	
63 A	HGM60H 2PT4S0000C 00063	HGM60H 3PT4S0000C 00063	HGM60H 4PT4S0000C 00063	HGM60H 4PLT4S0000C 00063	
HGM60L...30 kA / 460 V					
16 A	HGM60L 2PT4S0000C 00016	HGM60L 3PT4S0000C 00016	HGM60L 4PT4S0000C 00016	HGM60L 4PLT4S0000C 00016	
20 A	HGM60L 2PT4S0000C 00020	HGM60L 3PT4S0000C 00020	HGM60L 4PT4S0000C 00020	HGM60L 4PLT4S0000C 00020	
25 A	HGM60L 2PT4S0000C 00025	HGM60L 3PT4S0000C 00025	HGM60L 4PT4S0000C 00025	HGM60L 4PLT4S0000C 00025	
32 A	HGM60L 2PT4S0000C 00032	HGM60L 3PT4S0000C 00032	HGM60L 4PT4S0000C 00032	HGM60L 4PLT4S0000C 00032	
40 A	HGM60L 2PT4S0000C 00040	HGM60L 3PT4S0000C 00040	HGM60L 4PT4S0000C 00040	HGM60L 4PLT4S0000C 00040	
50 A	HGM60L 2PT4S0000C 00050	HGM60L 3PT4S0000C 00050	HGM60L 4PT4S0000C 00050	HGM60L 4PLT4S0000C 00050	
63 A	HGM60L 2PT4S0000C 00063	HGM60L 3PT4S0000C 00063	HGM60L 4PT4S0000C 00063	HGM60L 4PLT4S0000C 00063	


100 AF	In	2 Pole	3 Pole	4 Pole (RSTN)	4 Pole (NRST)
	HGM100E...16 kA / 460 V				
	16 A	HGM100E 2PT4S0000C 00016	HGM100E 3PT4S0000C 00016	HGM100E 4PT4S0000C 00016	HGM100E 4PLT4S0000C 00016
	20 A	HGM100E 2PT4S0000C 00020	HGM100E 3PT4S0000C 00020	HGM100E 4PT4S0000C 00020	HGM100E 4PLT4S0000C 00020
	25 A	HGM100E 2PT4S0000C 00025	HGM100E 3PT4S0000C 00025	HGM100E 4PT4S0000C 00025	HGM100E 4PLT4S0000C 00025
	32 A	HGM100E 2PT4S0000C 00032	HGM100E 3PT4S0000C 00032	HGM100E 4PT4S0000C 00032	HGM100E 4PLT4S0000C 00032
	40 A	HGM100E 2PT4S0000C 00040	HGM100E 3PT4S0000C 00040	HGM100E 4PT4S0000C 00040	HGM100E 4PLT4S0000C 00040
	50 A	HGM100E 2PT4S0000C 00050	HGM100E 3PT4S0000C 00050	HGM100E 4PT4S0000C 00050	HGM100E 4PLT4S0000C 00050
	63 A	HGM100E 2PT4S0000C 00063	HGM100E 3PT4S0000C 00063	HGM100E 4PT4S0000C 00063	HGM100E 4PLT4S0000C 00063
	75 A	HGM100E 2PT4S0000C 00075	HGM100E 3PT4S0000C 00075	HGM100E 4PT4S0000C 00075	HGM100E 4PLT4S0000C 00075
	80 A	HGM100E 2PT4S0000C 00080	HGM100E 3PT4S0000C 00080	HGM100E 4PT4S0000C 00080	HGM100E 4PLT4S0000C 00080
	100 A	HGM100E 2PT4S0000C 00100	HGM100E 3PT4S0000C 00100	HGM100E 4PT4S0000C 00100	HGM100E 4PLT4S0000C 00100


Ordering Information

HGM Type Molded Case Circuit Breakers (MCCB)

- Normal type/Front connection
- Except for accessory, Based on ambient temperature 40 °C and frequency 50/60 Hz

Fixing (Thermal Fixing / Instantaneous Fixing)

125 AF	In	2 Pole	3 Pole	4 Pole (RSTN)	4 Pole (NRST)
	HGM125S...26 kA / 460 V				
	16 A	HGM125S 2PT4S0000C 00016	HGM125S 3PT4S0000C 00016	HGM125S 4PT4S0000C 00016	HGM125S 4PLT4S0000C 00016
	20 A	HGM125S 2PT4S0000C 00020	HGM125S 3PT4S0000C 00020	HGM125S 4PT4S0000C 00020	HGM125S 4PLT4S0000C 00020
	25 A	HGM125S 2PT4S0000C 00025	HGM125S 3PT4S0000C 00025	HGM125S 4PT4S0000C 00025	HGM125S 4PLT4S0000C 00025
	32 A	HGM125S 2PT4S0000C 00032	HGM125S 3PT4S0000C 00032	HGM125S 4PT4S0000C 00032	HGM125S 4PLT4S0000C 00032
	40 A	HGM125S 2PT4S0000C 00040	HGM125S 3PT4S0000C 00040	HGM125S 4PT4S0000C 00040	HGM125S 4PLT4S0000C 00040
	50 A	HGM125S 2PT4S0000C 00050	HGM125S 3PT4S0000C 00050	HGM125S 4PT4S0000C 00050	HGM125S 4PLT4S0000C 00050
	63 A	HGM125S 2PT4S0000C 00063	HGM125S 3PT4S0000C 00063	HGM125S 4PT4S0000C 00063	HGM125S 4PLT4S0000C 00063
	75 A	HGM125S 2PT4S0000C 00075	HGM125S 3PT4S0000C 00075	HGM125S 4PT4S0000C 00075	HGM125S 4PLT4S0000C 00075
	80 A	HGM125S 2PT4S0000C 00080	HGM125S 3PT4S0000C 00080	HGM125S 4PT4S0000C 00080	HGM125S 4PLT4S0000C 00080
	100 A	HGM125S 2PT4S0000C 00100	HGM125S 3PT4S0000C 00100	HGM125S 4PT4S0000C 00100	HGM125S 4PLT4S0000C 00100
	125 A	HGM125S 2PT4S0000C 00125	HGM125S 3PT4S0000C 00125	HGM125S 4PT4S0000C 00125	HGM125S 4PLT4S0000C 00125
	HGM125H...38 kA / 460 V				
	16 A	HGM125H 2PT4S0000C 00016	HGM125H 3PT4S0000C 00016	HGM125H 4PT4S0000C 00016	HGM125H 4PLT4S0000C 00016
	20 A	HGM125H 2PT4S0000C 00020	HGM125H 3PT4S0000C 00020	HGM125H 4PT4S0000C 00020	HGM125H 4PLT4S0000C 00020
25 A	HGM125H 2PT4S0000C 00025	HGM125H 3PT4S0000C 00025	HGM125H 4PT4S0000C 00025	HGM125H 4PLT4S0000C 00025	
32 A	HGM125H 2PT4S0000C 00032	HGM125H 3PT4S0000C 00032	HGM125H 4PT4S0000C 00032	HGM125H 4PLT4S0000C 00032	
40 A	HGM125H 2PT4S0000C 00040	HGM125H 3PT4S0000C 00040	HGM125H 4PT4S0000C 00040	HGM125H 4PLT4S0000C 00040	
50 A	HGM125H 2PT4S0000C 00050	HGM125H 3PT4S0000C 00050	HGM125H 4PT4S0000C 00050	HGM125H 4PLT4S0000C 00050	
63 A	HGM125H 2PT4S0000C 00063	HGM125H 3PT4S0000C 00063	HGM125H 4PT4S0000C 00063	HGM125H 4PLT4S0000C 00063	
75 A	HGM125H 2PT4S0000C 00075	HGM125H 3PT4S0000C 00075	HGM125H 4PT4S0000C 00075	HGM125H 4PLT4S0000C 00075	
80 A	HGM125H 2PT4S0000C 00080	HGM125H 3PT4S0000C 00080	HGM125H 4PT4S0000C 00080	HGM125H 4PLT4S0000C 00080	
100 A	HGM125H 2PT4S0000C 00100	HGM125H 3PT4S0000C 00100	HGM125H 4PT4S0000C 00100	HGM125H 4PLT4S0000C 00100	
125 A	HGM125H 2PT4S0000C 00125	HGM125H 3PT4S0000C 00125	HGM125H 4PT4S0000C 00125	HGM125H 4PLT4S0000C 00125	
HGM125L...55 kA / 460 V					
16 A	HGM125L 2PT4S0000C 00016	HGM125L 3PT4S0000C 00016	HGM125L 4PT4S0000C 00016	HGM125L 4PLT4S0000C 00016	
20 A	HGM125L 2PT4S0000C 00020	HGM125L 3PT4S0000C 00020	HGM125L 4PT4S0000C 00020	HGM125L 4PLT4S0000C 00020	
25 A	HGM125L 2PT4S0000C 00025	HGM125L 3PT4S0000C 00025	HGM125L 4PT4S0000C 00025	HGM125L 4PLT4S0000C 00025	
32 A	HGM125L 2PT4S0000C 00032	HGM125L 3PT4S0000C 00032	HGM125L 4PT4S0000C 00032	HGM125L 4PLT4S0000C 00032	
40 A	HGM125L 2PT4S0000C 00040	HGM125L 3PT4S0000C 00040	HGM125L 4PT4S0000C 00040	HGM125L 4PLT4S0000C 00040	
50 A	HGM125L 2PT4S0000C 00050	HGM125L 3PT4S0000C 00050	HGM125L 4PT4S0000C 00050	HGM125L 4PLT4S0000C 00050	
63 A	HGM125L 2PT4S0000C 00063	HGM125L 3PT4S0000C 00063	HGM125L 4PT4S0000C 00063	HGM125L 4PLT4S0000C 00063	
75 A	HGM125L 2PT4S0000C 00075	HGM125L 3PT4S0000C 00075	HGM125L 4PT4S0000C 00075	HGM125L 4PLT4S0000C 00075	
80 A	HGM125L 2PT4S0000C 00080	HGM125L 3PT4S0000C 00080	HGM125L 4PT4S0000C 00080	HGM125L 4PLT4S0000C 00080	
100 A	HGM125L 2PT4S0000C 00100	HGM125L 3PT4S0000C 00100	HGM125L 4PT4S0000C 00100	HGM125L 4PLT4S0000C 00100	
125 A	HGM125L 2PT4S0000C 00125	HGM125L 3PT4S0000C 00125	HGM125L 4PT4S0000C 00125	HGM125L 4PLT4S0000C 00125	


160 AF	In	2 Pole	3 Pole	4 Pole (RSTN)	4 Pole (NRST)
	HGM160E...20 kA / 460 V				
	100 A	HGM160E 2PT4S0000C 00100	HGM160E 3PT4S0000C 00100	HGM160E 4PT4S0000C 00100	HGM160E 4PLT4S0000C 00100
	125 A	HGM160E 2PT4S0000C 00125	HGM160E 3PT4S0000C 00125	HGM160E 4PT4S0000C 00125	HGM160E 4PLT4S0000C 00125
	150 A	HGM160E 2PT4S0000C 00150	HGM160E 3PT4S0000C 00150	HGM160E 4PT4S0000C 00150	HGM160E 4PLT4S0000C 00150
	160 A	HGM160E 2PT4S0000C 00160	HGM160E 3PT4S0000C 00160	HGM160E 4PT4S0000C 00160	HGM160E 4PLT4S0000C 00160
	HGM160S...26 kA / 460 V				
	100 A	HGM160S 2PT4S0000C 00100	HGM160S 3PT4S0000C 00100	HGM160S 4PT4S0000C 00100	HGM160S 4PLT4S0000C 00100
	125 A	HGM160S 2PT4S0000C 00125	HGM160S 3PT4S0000C 00125	HGM160S 4PT4S0000C 00125	HGM160S 4PLT4S0000C 00125
	150 A	HGM160S 2PT4S0000C 00150	HGM160S 3PT4S0000C 00150	HGM160S 4PT4S0000C 00150	HGM160S 4PLT4S0000C 00150
	160 A	HGM160S 2PT4S0000C 00160	HGM160S 3PT4S0000C 00160	HGM160S 4PT4S0000C 00160	HGM160S 4PLT4S0000C 00160


Ordering Information


HGM Type Molded Case Circuit Breakers (MCCB)

- Normal type/Front connection
- Except for accessory, Based on ambient temperature 40 °C and frequency 50/60 Hz

Fixing (Thermal Fixing / Instantaneous Fixing)


400 AF	In	2 Pole	3 Pole	4 Pole (RSTN)	4 Pole (NRST)
	HGM400E...38 kA / 460 V				
	250 A	HGM400E 2PT4S0000C 00250	HGM400E 3PT4S0000C 00250	HGM400E 4PT4S0000C 00250	HGM400E 4PLT4S0000C 00250
	300 A	HGM400E 2PT4S0000C 00300	HGM400E 3PT4S0000C 00300	HGM400E 4PT4S0000C 00300	HGM400E 4PLT4S0000C 00300
	350 A	HGM400E 2PT4S0000C 00350	HGM400E 3PT4S0000C 00350	HGM400E 4PT4S0000C 00350	HGM400E 4PLT4S0000C 00350
	400 A	HGM400E 2PT4S0000C 00400	HGM400E 3PT4S0000C 00400	HGM400E 4PT4S0000C 00400	HGM400E 4PLT4S0000C 00400
	HGM400S...50 kA / 460 V				
	250 A	HGM400S 2PT4S0000C 00250	HGM400S 3PT4S0000C 00250	HGM400S 4PT4S0000C 00250	HGM400S 4PLT4S0000C 00250
	300 A	HGM400S 2PT4S0000C 00300	HGM400S 3PT4S0000C 00300	HGM400S 4PT4S0000C 00300	HGM400S 4PLT4S0000C 00300
	350 A	HGM400S 2PT4S0000C 00350	HGM400S 3PT4S0000C 00350	HGM400S 4PT4S0000C 00350	HGM400S 4PLT4S0000C 00350
	400 A	HGM400S 2PT4S0000C 00400	HGM400S 3PT4S0000C 00400	HGM400S 4PT4S0000C 00400	HGM400S 4PLT4S0000C 00400
	HGM400H...70 kA / 460 V				
	250 A	HGM400H 2PT4S0000C 00250	HGM400H 3PT4S0000C 00250	HGM400H 4PT4S0000C 00250	HGM400H 4PLT4S0000C 00250
	300 A	HGM400H 2PT4S0000C 00300	HGM400H 3PT4S0000C 00300	HGM400H 4PT4S0000C 00300	HGM400H 4PLT4S0000C 00300
	350 A	HGM400H 2PT4S0000C 00350	HGM400H 3PT4S0000C 00350	HGM400H 4PT4S0000C 00350	HGM400H 4PLT4S0000C 00350
	400 A	HGM400H 2PT4S0000C 00400	HGM400H 3PT4S0000C 00400	HGM400H 4PT4S0000C 00400	HGM400H 4PLT4S0000C 00400
	HGM400L...85 kA / 460 V				
250 A	HGM400L 2PT4S0000C 00250	HGM400L 3PT4S0000C 00250	HGM400L 4PT4S0000C 00250	HGM400L 4PLT4S0000C 00250	
300 A	HGM400L 2PT4S0000C 00300	HGM400L 3PT4S0000C 00300	HGM400L 4PT4S0000C 00300	HGM400L 4PLT4S0000C 00300	
350 A	HGM400L 2PT4S0000C 00350	HGM400L 3PT4S0000C 00350	HGM400L 4PT4S0000C 00350	HGM400L 4PLT4S0000C 00350	
400 A	HGM400L 2PT4S0000C 00400	HGM400L 3PT4S0000C 00400	HGM400L 4PT4S0000C 00400	HGM400L 4PLT4S0000C 00400	


630 AF	In	2 Pole	3 Pole	4 Pole (RSTN)	4 Pole (NRST)
	HGM630E...38 kA / 460 V				
	500 A	HGM630E 2PT4S0000C 00500	HGM630E 3PT4S0000C 00500	HGM630E 4PT4S0000C 00500	HGM630E 4PLT4S0000C 00500
	630 A	HGM630E 2PT4S0000C 00630	HGM630E 3PT4S0000C 00630	HGM630E 4PT4S0000C 00630	HGM630E 4PLT4S0000C 00630
	HGM630S...50 kA / 460 V				
	500 A	HGM630S 2PT4S0000C 00500	HGM630S 3PT4S0000C 00500	HGM630S 4PT4S0000C 00500	HGM630S 4PLT4S0000C 00500
	630 A	HGM630S 2PT4S0000C 00630	HGM630S 3PT4S0000C 00630	HGM630S 4PT4S0000C 00630	HGM630S 4PLT4S0000C 00630
	HGM630H...70 kA / 460 V				
	500 A	HGM630H 2PT4S0000C 00500	HGM630H 3PT4S0000C 00500	HGM630H 4PT4S0000C 00500	HGM630H 4PLT4S0000C 00500
	630 A	HGM630H 2PT4S0000C 00630	HGM630H 3PT4S0000C 00630	HGM630H 4PT4S0000C 00630	HGM630H 4PLT4S0000C 00630
	HGM630L...85 kA / 460 V				
	500 A	HGM630L 2PT4S0000C 00500	HGM630L 3PT4S0000C 00500	HGM630L 4PT4S0000C 00500	HGM630L 4PLT4S0000C 00500
	630 A	HGM630L 2PT4S0000C 00630	HGM630L 3PT4S0000C 00630	HGM630L 4PT4S0000C 00630	HGM630L 4PLT4S0000C 00630

800 AF	In	2 Pole	3 Pole	4 Pole (RSTN)	4 Pole (NRST)
	HGM800S...50 kA / 460 V				
	700 A	HGM800S 2PT4S0000C 00700	HGM800S 3PT4S0000C 00700	HGM800S 4PT4S0000C 00700	HGM800S 4PLT4S0000C 00700
	800 A	HGM800S 2PT4S0000C 00800	HGM800S 3PT4S0000C 00800	HGM800S 4PT4S0000C 00800	HGM800S 4PLT4S0000C 00800
	HGM800H...70 kA / 460 V				
	700 A	HGM800H 2PT4S0000C 00700	HGM800H 3PT4S0000C 00700	HGM800H 4PT4S0000C 00700	HGM800H 4PLT4S0000C 00700
	800 A	HGM800H 2PT4S0000C 00800	HGM800H 3PT4S0000C 00800	HGM800H 4PT4S0000C 00800	HGM800H 4PLT4S0000C 00800
	HGM800L...85 kA / 460 V				
	700 A	HGM800L 2PT4S0000C 00700	HGM800L 3PT4S0000C 00700	HGM800L 4PT4S0000C 00700	HGM800L 4PLT4S0000C 00700
	800 A	HGM800L 2PT4S0000C 00800	HGM800L 3PT4S0000C 00800	HGM800L 4PT4S0000C 00800	HGM800L 4PLT4S0000C 00800

HGM Type ZCT Molded Case Circuit Breakers (ZCT MCCB)

- Normal type/Front connection
- Except for accessory, Based on ambient temperature 40 °C and frequency 50/60 Hz


30 AF	In	2 Pole	3 Pole	4 Pole (RSTN)	4 Pole (NRST)
	HGM30E...16 kA / 460 V				
	16 A	HGM30E 2ZT4S0000C 00016F	HGM30E 3ZT4S0000C 00016F	HGM30E 4ZT4S0000C 00016F	-
	20 A	HGM30E 2ZT4S0000C 00020F	HGM30E 3ZT4S0000C 00020F	HGM30E 4ZT4S0000C 00020F	-
	25 A	HGM30E 2ZT4S0000C 00025F	HGM30E 3ZT4S0000C 00025F	HGM30E 4ZT4S0000C 00025F	-
	32 A	HGM30E 2ZT4S0000C 00032F	HGM30E 3ZT4S0000C 00032F	HGM30E 4ZT4S0000C 00032F	-
	HGM30S...20 kA / 460 V				
	16 A	HGM30S 2ZT4S0000C 00016F	HGM30S 3ZT4S0000C 00016F	HGM30S 4ZT4S0000C 00016F	-
	20 A	HGM30S 2ZT4S0000C 00020F	HGM30S 3ZT4S0000C 00020F	HGM30S 4ZT4S0000C 00020F	-
	25 A	HGM30S 2ZT4S0000C 00025F	HGM30S 3ZT4S0000C 00025F	HGM30S 4ZT4S0000C 00025F	-
	32 A	HGM30S 2ZT4S0000C 00032F	HGM30S 3ZT4S0000C 00032F	HGM30S 4ZT4S0000C 00032F	-


50 AF	In	2 Pole	3 Pole	4 Pole (RSTN)	4 Pole (NRST)
	HGM50E...16 kA / 460 V				
	16 A	HGM50E 2ZT4S0000C 00016F	HGM50E 3ZT4S0000C 00016F	HGM50E 4ZT4S0000C 00016F	-
	20 A	HGM50E 2ZT4S0000C 00020F	HGM50E 3ZT4S0000C 00020F	HGM50E 4ZT4S0000C 00020F	-
	25 A	HGM50E 2ZT4S0000C 00025F	HGM50E 3ZT4S0000C 00025F	HGM50E 4ZT4S0000C 00025F	-
	32 A	HGM50E 2ZT4S0000C 00032F	HGM50E 3ZT4S0000C 00032F	HGM50E 4ZT4S0000C 00032F	-
	40 A	HGM50E 2ZT4S0000C 00040F	HGM50E 3ZT4S0000C 00040F	HGM50E 4ZT4S0000C 00040F	-
	50 A	HGM50E 2ZT4S0000C 00050F	HGM50E 3ZT4S0000C 00050F	HGM50E 4ZT4S0000C 00050F	-
	HGM50S...20 kA / 460 V				
	16 A	HGM50S 2ZT4S0000C 00016F	HGM50S 3ZT4S0000C 00016F	HGM50S 4ZT4S0000C 00016F	-
	20 A	HGM50S 2ZT4S0000C 00020F	HGM50S 3ZT4S0000C 00020F	HGM50S 4ZT4S0000C 00020F	-
	25 A	HGM50S 2ZT4S0000C 00025F	HGM50S 3ZT4S0000C 00025F	HGM50S 4ZT4S0000C 00025F	-
	32 A	HGM50S 2ZT4S0000C 00032F	HGM50S 3ZT4S0000C 00032F	HGM50S 4ZT4S0000C 00032F	-
	40 A	HGM50S 2ZT4S0000C 00040F	HGM50S 3ZT4S0000C 00040F	HGM50S 4ZT4S0000C 00040F	-
	50 A	HGM50S 2ZT4S0000C 00050F	HGM50S 3ZT4S0000C 00050F	HGM50S 4ZT4S0000C 00050F	-
	HGM50H...38 kA / 460 V				
	16 A	HGM50H 2ZT4S0000C 00016F	HGM50H 3ZT4S0000C 00016F	HGM50H 4ZT4S0000C 00016F	-
	20 A	HGM50H 2ZT4S0000C 00020F	HGM50H 3ZT4S0000C 00020F	HGM50H 4ZT4S0000C 00020F	-
	25 A	HGM50H 2ZT4S0000C 00025F	HGM50H 3ZT4S0000C 00025F	HGM50H 4ZT4S0000C 00025F	-
	32 A	HGM50H 2ZT4S0000C 00032F	HGM50H 3ZT4S0000C 00032F	HGM50H 4ZT4S0000C 00032F	-
	40 A	HGM50H 2ZT4S0000C 00040F	HGM50H 3ZT4S0000C 00040F	HGM50H 4ZT4S0000C 00040F	-
	50 A	HGM50H 2ZT4S0000C 00050F	HGM50H 3ZT4S0000C 00050F	HGM50H 4ZT4S0000C 00050F	-
	HGM50L...55 kA / 460 V				
	16 A	HGM50L 2ZT4S0000C 00016F	HGM50L 3ZT4S0000C 00016F	HGM50L 4ZT4S0000C 00016F	-
	20 A	HGM50L 2ZT4S0000C 00020F	HGM50L 3ZT4S0000C 00020F	HGM50L 4ZT4S0000C 00020F	-
	25 A	HGM50L 2ZT4S0000C 00025F	HGM50L 3ZT4S0000C 00025F	HGM50L 4ZT4S0000C 00025F	-
	32 A	HGM50L 2ZT4S0000C 00032F	HGM50L 3ZT4S0000C 00032F	HGM50L 4ZT4S0000C 00032F	-
	40 A	HGM50L 2ZT4S0000C 00040F	HGM50L 3ZT4S0000C 00040F	HGM50L 4ZT4S0000C 00040F	-
50 A	HGM50L 2ZT4S0000C 00050F	HGM50L 3ZT4S0000C 00050F	HGM50L 4ZT4S0000C 00050F	-	


Ordering Information


HGM Type ZCT Molded Case Circuit Breakers (ZCT MCCB)

- Normal type/Front connection
- Except for accessory, Based on ambient temperature 40 °C and frequency 50/60 Hz

60 AF	In	2 Pole	3 Pole	4 Pole (RSTN)	4 Pole (NRST)
	HGM60E...16 kA / 460 V				
	16 A	HGM60E 2ZT4S0000C 00016F	HGM60E 3ZT4S0000C 00016F	HGM60E 4ZT4S0000C 00016F	-
	20 A	HGM60E 2ZT4S0000C 00020F	HGM60E 3ZT4S0000C 00020F	HGM60E 4ZT4S0000C 00020F	-
	25 A	HGM60E 2ZT4S0000C 00025F	HGM60E 3ZT4S0000C 00025F	HGM60E 4ZT4S0000C 00025F	-
	32 A	HGM60E 2ZT4S0000C 00032F	HGM60E 3ZT4S0000C 00032F	HGM60E 4ZT4S0000C 00032F	-
	40 A	HGM60E 2ZT4S0000C 00040F	HGM60E 3ZT4S0000C 00040F	HGM60E 4ZT4S0000C 00040F	-
	50 A	HGM60E 2ZT4S0000C 00050F	HGM60E 3ZT4S0000C 00050F	HGM60E 4ZT4S0000C 00050F	-
	63 A	HGM60E 2ZT4S0000C 00063F	HGM60E 3ZT4S0000C 00063F	HGM60E 4ZT4S0000C 00063F	-
	HGM60S...20 kA / 460 V				
	16A	HGM60S 2ZT4S0000C 00016F	HGM60S 3ZT4S0000C 00016F	HGM60S 4ZT4S0000C 00016F	-
	20A	HGM60S 2ZT4S0000C 00020F	HGM60S 3ZT4S0000C 00020F	HGM60S 4ZT4S0000C 00020F	-
	25A	HGM60S 2ZT4S0000C 00025F	HGM60S 3ZT4S0000C 00025F	HGM60S 4ZT4S0000C 00025F	-
	32A	HGM60S 2ZT4S0000C 00032F	HGM60S 3ZT4S0000C 00032F	HGM60S 4ZT4S0000C 00032F	-
	40A	HGM60S 2ZT4S0000C 00040F	HGM60S 3ZT4S0000C 00040F	HGM60S 4ZT4S0000C 00040F	-
50A	HGM60S 2ZT4S0000C 00050F	HGM60S 3ZT4S0000C 00050F	HGM60S 4ZT4S0000C 00050F	-	
63A	HGM60S 2ZT4S0000C 00063F	HGM60S 3ZT4S0000C 00063F	HGM60S 4ZT4S0000C 00063F	-	
HGM60H...26 kA / 460 V					
16 A	HGM60H 2ZT4S0000C 00016F	HGM60H 3ZT4S0000C 00016F	HGM60H 4ZT4S0000C 00016F	-	
20 A	HGM60H 2ZT4S0000C 00020F	HGM60H 3ZT4S0000C 00020F	HGM60H 4ZT4S0000C 00020F	-	
25 A	HGM60H 2ZT4S0000C 00025F	HGM60H 3ZT4S0000C 00025F	HGM60H 4ZT4S0000C 00025F	-	
32 A	HGM60H 2ZT4S0000C 00032F	HGM60H 3ZT4S0000C 00032F	HGM60H 4ZT4S0000C 00032F	-	
40 A	HGM60H 2ZT4S0000C 00040F	HGM60H 3ZT4S0000C 00040F	HGM60H 4ZT4S0000C 00040F	-	
50 A	HGM60H 2ZT4S0000C 00050F	HGM60H 3ZT4S0000C 00050F	HGM60H 4ZT4S0000C 00050F	-	
63 A	HGM60H 2ZT4S0000C 00063F	HGM60H 3ZT4S0000C 00063F	HGM60H 4ZT4S0000C 00063F	-	
HGM60L...30 kA / 460 V					
16 A	HGM60L 2ZT4S0000C 00016F	HGM60L 3ZT4S0000C 00016F	HGM60L 4ZT4S0000C 00016F	-	
20 A	HGM60L 2ZT4S0000C 00020F	HGM60L 3ZT4S0000C 00020F	HGM60L 4ZT4S0000C 00020F	-	
25 A	HGM60L 2ZT4S0000C 00025F	HGM60L 3ZT4S0000C 00025F	HGM60L 4ZT4S0000C 00025F	-	
32 A	HGM60L 2ZT4S0000C 00032F	HGM60L 3ZT4S0000C 00032F	HGM60L 4ZT4S0000C 00032F	-	
40 A	HGM60L 2ZT4S0000C 00040F	HGM60L 3ZT4S0000C 00040F	HGM60L 4ZT4S0000C 00040F	-	
50 A	HGM60L 2ZT4S0000C 00050F	HGM60L 3ZT4S0000C 00050F	HGM60L 4ZT4S0000C 00050F	-	
63 A	HGM60L 2ZT4S0000C 00063F	HGM60L 3ZT4S0000C 00063F	HGM60L 4ZT4S0000C 00063F	-	

100 AF	In	2 Pole	3 Pole	4 Pole (RSTN)	4 Pole (NRST)
	HGM100E...16 kA / 460 V				
	16 A	HGM100E 2ZT4S0000C 00016F	HGM100E 3ZT4S0000C 00016F	HGM100E 4ZT4S0000C 00016F	-
	20 A	HGM100E 2ZT4S0000C 00020F	HGM100E 3ZT4S0000C 00020F	HGM100E 4ZT4S0000C 00020F	-
	25 A	HGM100E 2ZT4S0000C 00025F	HGM100E 3ZT4S0000C 00025F	HGM100E 4ZT4S0000C 00025F	-
	32 A	HGM100E 2ZT4S0000C 00032F	HGM100E 3ZT4S0000C 00032F	HGM100E 4ZT4S0000C 00032F	-
	40 A	HGM100E 2ZT4S0000C 00040F	HGM100E 3ZT4S0000C 00040F	HGM100E 4ZT4S0000C 00040F	-
	50 A	HGM100E 2ZT4S0000C 00050F	HGM100E 3ZT4S0000C 00050F	HGM100E 4ZT4S0000C 00050F	-
	63 A	HGM100E 2ZT4S0000C 00063F	HGM100E 3ZT4S0000C 00063F	HGM100E 4ZT4S0000C 00063F	-
	75 A	HGM100E 2ZT4S0000C 00075F	HGM100E 3ZT4S0000C 00075F	HGM100E 4ZT4S0000C 00075F	-
	80 A	HGM100E 2ZT4S0000C 00080F	HGM100E 3ZT4S0000C 00080F	HGM100E 4ZT4S0000C 00080F	-
	100 A	HGM100E 2ZT4S0000C 00100F	HGM100E 3ZT4S0000C 00100F	HGM100E 4ZT4S0000C 00100F	-


100 AF	In	2 Pole	3 Pole	4 Pole (RSTN)	4 Pole (NRST)
	HGM100S...20 kA / 460 V				
	16 A	HGM100S 2ZT4S0000C 00016F	HGM100S 3ZT4S0000C 00016F	HGM100S 4ZT4S0000C 00016F	-
	20 A	HGM100S 2ZT4S0000C 00020F	HGM100S 3ZT4S0000C 00020F	HGM100S 4ZT4S0000C 00020F	-
	25 A	HGM100S 2ZT4S0000C 00025F	HGM100S 3ZT4S0000C 00025F	HGM100S 4ZT4S0000C 00025F	-
	32 A	HGM100S 2ZT4S0000C 00032F	HGM100S 3ZT4S0000C 00032F	HGM100S 4ZT4S0000C 00032F	-
	40 A	HGM100S 2ZT4S0000C 00040F	HGM100S 3ZT4S0000C 00040F	HGM100S 4ZT4S0000C 00040F	-
	50 A	HGM100S 2ZT4S0000C 00050F	HGM100S 3ZT4S0000C 00050F	HGM100S 4ZT4S0000C 00050F	-
	63 A	HGM100S 2ZT4S0000C 00063F	HGM100S 3ZT4S0000C 00063F	HGM100S 4ZT4S0000C 00063F	-
	75 A	HGM100S 2ZT4S0000C 00075F	HGM100S 3ZT4S0000C 00075F	HGM100S 4ZT4S0000C 00075F	-
	80 A	HGM100S 2ZT4S0000C 00080F	HGM100S 3ZT4S0000C 00080F	HGM100S 4ZT4S0000C 00080F	-
	100 A	HGM100S 2ZT4S0000C 00100F	HGM100S 3ZT4S0000C 00100F	HGM100S 4ZT4S0000C 00100F	-
	HGM100H...38 kA / 460 V				
	16 A	HGM100H 2ZT4S0000C 00016F	HGM100H 3ZT4S0000C 00016F	HGM100H 4ZT4S0000C 00016F	-
	20 A	HGM100H 2ZT4S0000C 00020F	HGM100H 3ZT4S0000C 00020F	HGM100H 4ZT4S0000C 00020F	-
25 A	HGM100H 2ZT4S0000C 00025F	HGM100H 3ZT4S0000C 00025F	HGM100H 4ZT4S0000C 00025F	-	
32 A	HGM100H 2ZT4S0000C 00032F	HGM100H 3ZT4S0000C 00032F	HGM100H 4ZT4S0000C 00032F	-	
40 A	HGM100H 2ZT4S0000C 00040F	HGM100H 3ZT4S0000C 00040F	HGM100H 4ZT4S0000C 00040F	-	
50 A	HGM100H 2ZT4S0000C 00050F	HGM100H 3ZT4S0000C 00050F	HGM100H 4ZT4S0000C 00050F	-	
63 A	HGM100H 2ZT4S0000C 00063F	HGM100H 3ZT4S0000C 00063F	HGM100H 4ZT4S0000C 00063F	-	
75 A	HGM100H 2ZT4S0000C 00075F	HGM100H 3ZT4S0000C 00075F	HGM100H 4ZT4S0000C 00075F	-	
80 A	HGM100H 2ZT4S0000C 00080F	HGM100H 3ZT4S0000C 00080F	HGM100H 4ZT4S0000C 00080F	-	
100 A	HGM100H 2ZT4S0000C 00100F	HGM100H 3ZT4S0000C 00100F	HGM100H 4ZT4S0000C 00100F	-	
HGM100L...30 kA / 460 V					
16 A	HGM100L 2ZT4S0000C 00016F	HGM100L 3ZT4S0000C 00016F	HGM100L 4ZT4S0000C 00016F	-	
20 A	HGM100L 2ZT4S0000C 00020F	HGM100L 3ZT4S0000C 00020F	HGM100L 4ZT4S0000C 00020F	-	
25 A	HGM100L 2ZT4S0000C 00025F	HGM100L 3ZT4S0000C 00025F	HGM100L 4ZT4S0000C 00025F	-	
32 A	HGM100L 2ZT4S0000C 00032F	HGM100L 3ZT4S0000C 00032F	HGM100L 4ZT4S0000C 00032F	-	
40 A	HGM100L 2ZT4S0000C 00040F	HGM100L 3ZT4S0000C 00040F	HGM100L 4ZT4S0000C 00040F	-	
50 A	HGM100L 2ZT4S0000C 00050F	HGM100L 3ZT4S0000C 00050F	HGM100L 4ZT4S0000C 00050F	-	
63 A	HGM100L 2ZT4S0000C 00063F	HGM100L 3ZT4S0000C 00063F	HGM100L 4ZT4S0000C 00063F	-	
75 A	HGM100L 2ZT4S0000C 00075F	HGM100L 3ZT4S0000C 00075F	HGM100L 4ZT4S0000C 00075F	-	
80 A	HGM100L 2ZT4S0000C 00080F	HGM100L 3ZT4S0000C 00080F	HGM100L 4ZT4S0000C 00080F	-	
100 A	HGM100L 2ZT4S0000C 00100F	HGM100L 3ZT4S0000C 00100F	HGM100L 4ZT4S0000C 00100F	-	


125 AF	In	2 Pole	3 Pole	4 Pole (RSTN)	4 Pole (NRST)
	HGM125E...20 kA / 460 V				
	16 A	HGM125E 2ZT4S0000C 00016F	HGM125E 3ZT4S0000C 00016F	HGM125E 4ZT4S0000C 00016F	-
	20 A	HGM125E 2ZT4S0000C 00020F	HGM125E 3ZT4S0000C 00020F	HGM125E 4ZT4S0000C 00020F	-
	25 A	HGM125E 2ZT4S0000C 00025F	HGM125E 3ZT4S0000C 00025F	HGM125E 4ZT4S0000C 00025F	-
	32 A	HGM125E 2ZT4S0000C 00032F	HGM125E 3ZT4S0000C 00032F	HGM125E 4ZT4S0000C 00032F	-
	40 A	HGM125E 2ZT4S0000C 00040F	HGM125E 3ZT4S0000C 00040F	HGM125E 4ZT4S0000C 00040F	-
	50 A	HGM125E 2ZT4S0000C 00050F	HGM125E 3ZT4S0000C 00050F	HGM125E 4ZT4S0000C 00050F	-
	63 A	HGM125E 2ZT4S0000C 00063F	HGM125E 3ZT4S0000C 00063F	HGM125E 4ZT4S0000C 00063F	-
	75 A	HGM125E 2ZT4S0000C 00075F	HGM125E 3ZT4S0000C 00075F	HGM125E 4ZT4S0000C 00075F	-
	80 A	HGM125E 2ZT4S0000C 00080F	HGM125E 3ZT4S0000C 00080F	HGM125E 4ZT4S0000C 00080F	-
	100 A	HGM125E 2ZT4S0000C 00100F	HGM125E 3ZT4S0000C 00100F	HGM125E 4ZT4S0000C 00100F	-
	125 A	HGM125E 2ZT4S0000C 00125F	HGM125E 3ZT4S0000C 00125F	HGM125E 4ZT4S0000C 00125F	-


Ordering Information


HGM Type ZCT Molded Case Circuit Breakers (ZCT MCCB)

- Normal type/Front connection
- Except for accessory, Based on ambient temperature 40 °C and frequency 50/60 Hz

125 AF	In	2 Pole	3 Pole	4 Pole (RSTN)	4 Pole (NRST)
	HGM125S...26 kA / 460 V				
	16 A	HGM125S 2ZT4S0000C 00016F	HGM125S 3ZT4S0000C 00016F	HGM125S 4ZT4S0000C 00016F	-
	20 A	HGM125S 2ZT4S0000C 00020F	HGM125S 3ZT4S0000C 00020F	HGM125S 4ZT4S0000C 00020F	-
	25 A	HGM125S 2ZT4S0000C 00025F	HGM125S 3ZT4S0000C 00025F	HGM125S 4ZT4S0000C 00025F	-
	32 A	HGM125S 2ZT4S0000C 00032F	HGM125S 3ZT4S0000C 00032F	HGM125S 4ZT4S0000C 00032F	-
	40 A	HGM125S 2ZT4S0000C 00040F	HGM125S 3ZT4S0000C 00040F	HGM125S 4ZT4S0000C 00040F	-
	50 A	HGM125S 2ZT4S0000C 00050F	HGM125S 3ZT4S0000C 00050F	HGM125S 4ZT4S0000C 00050F	-
	63 A	HGM125S 2ZT4S0000C 00063F	HGM125S 3ZT4S0000C 00063F	HGM125S 4ZT4S0000C 00063F	-
	75 A	HGM125S 2ZT4S0000C 00075F	HGM125S 3ZT4S0000C 00075F	HGM125S 4ZT4S0000C 00075F	-
	80 A	HGM125S 2ZT4S0000C 00080F	HGM125S 3ZT4S0000C 00080F	HGM125S 4ZT4S0000C 00080F	-
	100 A	HGM125S 2ZT4S0000C 00100F	HGM125S 3ZT4S0000C 00100F	HGM125S 4ZT4S0000C 00100F	-
	125 A	HGM125S 2ZT4S0000C 00125F	HGM125S 3ZT4S0000C 00125F	HGM125S 4ZT4S0000C 00125F	-
	HGM125H...38 kA / 460 V				
	16 A	HGM125H 2ZT4S0000C 00016F	HGM125H 3ZT4S0000C 00016F	HGM125H 4ZT4S0000C 00016F	-
20 A	HGM125H 2ZT4S0000C 00020F	HGM125H 3ZT4S0000C 00020F	HGM125H 4ZT4S0000C 00020F	-	
25 A	HGM125H 2ZT4S0000C 00025F	HGM125H 3ZT4S0000C 00025F	HGM125H 4ZT4S0000C 00025F	-	
32 A	HGM125H 2ZT4S0000C 00032F	HGM125H 3ZT4S0000C 00032F	HGM125H 4ZT4S0000C 00032F	-	
40 A	HGM125H 2ZT4S0000C 00040F	HGM125H 3ZT4S0000C 00040F	HGM125H 4ZT4S0000C 00040F	-	
50 A	HGM125H 2ZT4S0000C 00050F	HGM125H 3ZT4S0000C 00050F	HGM125H 4ZT4S0000C 00050F	-	
63 A	HGM125H 2ZT4S0000C 00063F	HGM125H 3ZT4S0000C 00063F	HGM125H 4ZT4S0000C 00063F	-	
75 A	HGM125H 2ZT4S0000C 00075F	HGM125H 3ZT4S0000C 00075F	HGM125H 4ZT4S0000C 00075F	-	
80 A	HGM125H 2ZT4S0000C 00080F	HGM125H 3ZT4S0000C 00080F	HGM125H 4ZT4S0000C 00080F	-	
100 A	HGM125H 2ZT4S0000C 00100F	HGM125H 3ZT4S0000C 00100F	HGM125H 4ZT4S0000C 00100F	-	
125 A	HGM125H 2ZT4S0000C 00125F	HGM125H 3ZT4S0000C 00125F	HGM125H 4ZT4S0000C 00125F	-	
HGM125L...55 kA / 460 V					
16 A	HGM125L 2ZT4S0000C 00016F	HGM125L 3ZT4S0000C 00016F	HGM125L 4ZT4S0000C 00016F	-	
20 A	HGM125L 2ZT4S0000C 00020F	HGM125L 3ZT4S0000C 00020F	HGM125L 4ZT4S0000C 00020F	-	
25 A	HGM125L 2ZT4S0000C 00025F	HGM125L 3ZT4S0000C 00025F	HGM125L 4ZT4S0000C 00025F	-	
32 A	HGM125L 2ZT4S0000C 00032F	HGM125L 3ZT4S0000C 00032F	HGM125L 4ZT4S0000C 00032F	-	
40 A	HGM125L 2ZT4S0000C 00040F	HGM125L 3ZT4S0000C 00040F	HGM125L 4ZT4S0000C 00040F	-	
50 A	HGM125L 2ZT4S0000C 00050F	HGM125L 3ZT4S0000C 00050F	HGM125L 4ZT4S0000C 00050F	-	
63 A	HGM125L 2ZT4S0000C 00063F	HGM125L 3ZT4S0000C 00063F	HGM125L 4ZT4S0000C 00063F	-	
75 A	HGM125L 2ZT4S0000C 00075F	HGM125L 3ZT4S0000C 00075F	HGM125L 4ZT4S0000C 00075F	-	
80 A	HGM125L 2ZT4S0000C 00080F	HGM125L 3ZT4S0000C 00080F	HGM125L 4ZT4S0000C 00080F	-	
100 A	HGM125L 2ZT4S0000C 00100F	HGM125L 3ZT4S0000C 00100F	HGM125L 4ZT4S0000C 00100F	-	
125 A	HGM125L 2ZT4S0000C 00125F	HGM125L 3ZT4S0000C 00125F	HGM125L 4ZT4S0000C 00125F	-	

160 AF	In	2 Pole	3 Pole	4 Pole (RSTN)	4 Pole (NRST)
	HGM160E...20 kA / 460 V				
	100 A	HGM160E 2ZT4S0000C 00100F	HGM160E 3ZT4S0000C 00100F	HGM160E 4ZT4S0000C 00100F	-
	125 A	HGM160E 2ZT4S0000C 00125F	HGM160E 3ZT4S0000C 00125F	HGM160E 4ZT4S0000C 00125F	-
	150 A	HGM160E 2ZT4S0000C 00150F	HGM160E 3ZT4S0000C 00150F	HGM160E 4ZT4S0000C 00150F	-
	160 A	HGM160E 2ZT4S0000C 00160F	HGM160E 3ZT4S0000C 00160F	HGM160E 4ZT4S0000C 00160F	-
	HGM160S...26 kA / 460 V				
	100 A	HGM160S 2ZT4S0000C 00100F	HGM160S 3ZT4S0000C 00100F	HGM160S 4ZT4S0000C 00100F	-
	125 A	HGM160S 2ZT4S0000C 00125F	HGM160S 3ZT4S0000C 00125F	HGM160S 4ZT4S0000C 00125F	-
	150 A	HGM160S 2ZT4S0000C 00150F	HGM160S 3ZT4S0000C 00150F	HGM160S 4ZT4S0000C 00150F	-
	160 A	HGM160S 2ZT4S0000C 00160F	HGM160S 3ZT4S0000C 00160F	HGM160S 4ZT4S0000C 00160F	-


160 AF	In	2 Pole	3 Pole	4 Pole (RSTN)	4 Pole (NRST)
	HGM160H...38 kA / 460 V				
	100 A	HGM160H 2ZT4S0000C 00100F	HGM160H 3ZT4S0000C 00100F	HGM160H 4ZT4S0000C 00100F	-
	125 A	HGM160H 2ZT4S0000C 00125F	HGM160H 3ZT4S0000C 00125F	HGM160H 4ZT4S0000C 00125F	-
	150 A	HGM160H 2ZT4S0000C 00150F	HGM160H 3ZT4S0000C 00150F	HGM160H 4ZT4S0000C 00150F	-
	160 A	HGM160H 2ZT4S0000C 00160F	HGM160H 3ZT4S0000C 00160F	HGM160H 4ZT4S0000C 00160F	-
	HGM160L...55 kA / 460 V				
	100 A	HGM160L 2ZT4S0000C 00100F	HGM160L 3ZT4S0000C 00100F	HGM160L 4ZT4S0000C 00100F	-
	125 A	HGM160L 2ZT4S0000C 00125F	HGM160L 3ZT4S0000C 00125F	HGM160L 4ZT4S0000C 00125F	-
	150 A	HGM160L 2ZT4S0000C 00150F	HGM160L 3ZT4S0000C 00150F	HGM160L 4ZT4S0000C 00150F	-
	160 A	HGM160L 2ZT4S0000C 00160F	HGM160L 3ZT4S0000C 00160F	HGM160L 4ZT4S0000C 00160F	-


250 AF	In	2 Pole	3 Pole	4 Pole (RSTN)	4 Pole (NRST)
	HGM250E...20 kA / 460 V				
	100 A	HGM250E 2ZT4S0000C 00100F	HGM250E 3ZT4S0000C 00100F	HGM250E 4ZT4S0000C 00100F	-
	125 A	HGM250E 2ZT4S0000C 00125F	HGM250E 3ZT4S0000C 00125F	HGM250E 4ZT4S0000C 00125F	-
	150 A	HGM250E 2ZT4S0000C 00150F	HGM250E 3ZT4S0000C 00150F	HGM250E 4ZT4S0000C 00150F	-
	160 A	HGM250E 2ZT4S0000C 00160F	HGM250E 3ZT4S0000C 00160F	HGM250E 4ZT4S0000C 00160F	-
	175 A	HGM250E 2ZT4S0000C 00175F	HGM250E 3ZT4S0000C 00175F	HGM250E 4ZT4S0000C 00175F	-
	200 A	HGM250E 2ZT4S0000C 00200F	HGM250E 3ZT4S0000C 00200F	HGM250E 4ZT4S0000C 00200F	-
	225 A	HGM250E 2ZT4S0000C 00225F	HGM250E 3ZT4S0000C 00225F	HGM250E 4ZT4S0000C 00225F	-
	250 A	HGM250E 2ZT4S0000C 00250F	HGM250E 3ZT4S0000C 00250F	HGM250E 4ZT4S0000C 00250F	-
	HGM250S...26 kA / 460 V				
	100 A	HGM250S 2ZT4S0000C 00100F	HGM250S 3ZT4S0000C 00100F	HGM250S 4ZT4S0000C 00100F	-
	125 A	HGM250S 2ZT4S0000C 00125F	HGM250S 3ZT4S0000C 00125F	HGM250S 4ZT4S0000C 00125F	-
	150 A	HGM250S 2ZT4S0000C 00150F	HGM250S 3ZT4S0000C 00150F	HGM250S 4ZT4S0000C 00150F	-
	160 A	HGM250S 2ZT4S0000C 00160F	HGM250S 3ZT4S0000C 00160F	HGM250S 4ZT4S0000C 00160F	-
	175 A	HGM250S 2ZT4S0000C 00175F	HGM250S 3ZT4S0000C 00175F	HGM250S 4ZT4S0000C 00175F	-
	200 A	HGM250S 2ZT4S0000C 00200F	HGM250S 3ZT4S0000C 00200F	HGM250S 4ZT4S0000C 00200F	-
	225 A	HGM250S 2ZT4S0000C 00225F	HGM250S 3ZT4S0000C 00225F	HGM250S 4ZT4S0000C 00225F	-
	250 A	HGM250S 2ZT4S0000C 00250F	HGM250S 3ZT4S0000C 00250F	HGM250S 4ZT4S0000C 00250F	-
	HGM250H...38 kA / 460 V				
	100 A	HGM250H 2ZT4S0000C 00100F	HGM250H 3ZT4S0000C 00100F	HGM250H 4ZT4S0000C 00100F	-
	125 A	HGM250H 2ZT4S0000C 00125F	HGM250H 3ZT4S0000C 00125F	HGM250H 4ZT4S0000C 00125F	-
	150 A	HGM250H 2ZT4S0000C 00150F	HGM250H 3ZT4S0000C 00150F	HGM250H 4ZT4S0000C 00150F	-
	160 A	HGM250H 2ZT4S0000C 00160F	HGM250H 3ZT4S0000C 00160F	HGM250H 4ZT4S0000C 00160F	-
	175 A	HGM250H 2ZT4S0000C 00175F	HGM250H 3ZT4S0000C 00175F	HGM250H 4ZT4S0000C 00175F	-
	200 A	HGM250H 2ZT4S0000C 00200F	HGM250H 3ZT4S0000C 00200F	HGM250H 4ZT4S0000C 00200F	-
	225 A	HGM250H 2ZT4S0000C 00225F	HGM250H 3ZT4S0000C 00225F	HGM250H 4ZT4S0000C 00225F	-
	250 A	HGM250H 2ZT4S0000C 00250F	HGM250H 3ZT4S0000C 00250F	HGM250H 4ZT4S0000C 00250F	-
	HGM250L...55 kA / 460 V				
	100 A	HGM250L 2ZT4S0000C 00100F	HGM250L 3ZT4S0000C 00100F	HGM250L 4ZT4S0000C 00100F	-
	125 A	HGM250L 2ZT4S0000C 00125F	HGM250L 3ZT4S0000C 00125F	HGM250L 4ZT4S0000C 00125F	-
	150 A	HGM250L 2ZT4S0000C 00150F	HGM250L 3ZT4S0000C 00150F	HGM250L 4ZT4S0000C 00150F	-
	160 A	HGM250L 2ZT4S0000C 00160F	HGM250L 3ZT4S0000C 00160F	HGM250L 4ZT4S0000C 00160F	-
	175 A	HGM250L 2ZT4S0000C 00175F	HGM250L 3ZT4S0000C 00175F	HGM250L 4ZT4S0000C 00175F	-
	200 A	HGM250L 2ZT4S0000C 00200F	HGM250L 3ZT4S0000C 00200F	HGM250L 4ZT4S0000C 00200F	-
	225 A	HGM250L 2ZT4S0000C 00225F	HGM250L 3ZT4S0000C 00225F	HGM250L 4ZT4S0000C 00225F	-
	250 A	HGM250L 2ZT4S0000C 00250F	HGM250L 3ZT4S0000C 00250F	HGM250L 4ZT4S0000C 00250F	-


Ordering Information

HGM Type ZCT Molded Case Circuit Breakers (ZCT MCCB)

- Normal type/Front connection
- Except for accessory, Based on ambient temperature 40 °C and frequency 50/60 Hz



400 AF	In	2 Pole	3 Pole	4 Pole (RSTN)	4 Pole (NRST)
	HGM400E...38 kA / 460 V				
	250 A	HGM400E 2ZT4S0000C 00250F	HGM400E 3ZT4S0000C 00250F	HGM400E 4ZT4S0000C 00250F	-
	300 A	HGM400E 2ZT4S0000C 00300F	HGM400E 3ZT4S0000C 00300F	HGM400E 4ZT4S0000C 00300F	-
	350 A	HGM400E 2ZT4S0000C 00350F	HGM400E 3ZT4S0000C 00350F	HGM400E 4ZT4S0000C 00350F	-
	400 A	HGM400E 2ZT4S0000C 00400F	HGM400E 3ZT4S0000C 00400F	HGM400E 4ZT4S0000C 00400F	-
	HGM400S...50 kA / 460 V				
	250 A	HGM400S 2ZT4S0000C 00250F	HGM400S 3ZT4S0000C 00250F	HGM400S 4ZT4S0000C 00250F	-
	300 A	HGM400S 2ZT4S0000C 00300F	HGM400S 3ZT4S0000C 00300F	HGM400S 4ZT4S0000C 00300F	-
	350 A	HGM400S 2ZT4S0000C 00350F	HGM400S 3ZT4S0000C 00350F	HGM400S 4ZT4S0000C 00350F	-
	400 A	HGM400S 2ZT4S0000C 00400F	HGM400S 3ZT4S0000C 00400F	HGM400S 4ZT4S0000C 00400F	-
	HGM400H...70 kA / 460 V				
	250 A	HGM400H 2ZT4S0000C 00250F	HGM400H 3ZT4S0000C 00250F	HGM400H 4ZT4S0000C 00250F	-
	300 A	HGM400H 2ZT4S0000C 00300F	HGM400H 3ZT4S0000C 00300F	HGM400H 4ZT4S0000C 00300F	-
	350 A	HGM400H 2ZT4S0000C 00350F	HGM400H 3ZT4S0000C 00350F	HGM400H 4ZT4S0000C 00350F	-
	400 A	HGM400H 2ZT4S0000C 00400F	HGM400H 3ZT4S0000C 00400F	HGM400H 4ZT4S0000C 00400F	-
	HGM400L...85 kA / 460 V				
250 A	HGM400L 2ZT4S0000C 00250F	HGM400L 3ZT4S0000C 00250F	HGM400L 4ZT4S0000C 00250F	-	
300 A	HGM400L 2ZT4S0000C 00300F	HGM400L 3ZT4S0000C 00300F	HGM400L 4ZT4S0000C 00300F	-	
350 A	HGM400L 2ZT4S0000C 00350F	HGM400L 3ZT4S0000C 00350F	HGM400L 4ZT4S0000C 00350F	-	
400 A	HGM400L 2ZT4S0000C 00400F	HGM400L 3ZT4S0000C 00400F	HGM400L 4ZT4S0000C 00400F	-	

630 AF	In	2 Pole	3 Pole	4 Pole (RSTN)	4 Pole (NRST)
	HGM630E...38 kA / 460 V				
	500 A	HGM630E 2ZT4S0000C 00500F	HGM630E 3ZT4S0000C 00500F	-	-
	630 A	HGM630E 2ZT4S0000C 00630F	HGM630E 3ZT4S0000C 00630F	-	-
	HGM630S...50 kA / 460 V				
	500 A	HGM630S 2ZT4S0000C 00500F	HGM630S 3ZT4S0000C 00500F	-	-
	630 A	HGM630S 2ZT4S0000C 00630F	HGM630S 3ZT4S0000C 00630F	-	-
	HGM630H...70 kA / 460 V				
	500 A	HGM630H 2ZT4S0000C 00500F	HGM630H 3ZT4S0000C 00500F	-	-
	630 A	HGM630H 2ZT4S0000C 00630F	HGM630H 3ZT4S0000C 00630F	-	-
	HGM630L...85 kA / 460 V				
	500 A	HGM630L 2ZT4S0000C 00500F	HGM630L 3ZT4S0000C 00500F	-	-
	630 A	HGM630L 2ZT4S0000C 00630F	HGM630L 3ZT4S0000C 00630F	-	-

800 AF	In	2 Pole	3 Pole	4 Pole (RSTN)	4 Pole (NRST)
	HGM800S...50 kA / 460 V				
	700 A	HGM800S 2ZT4S0000C 00700F	HGM800S 3ZT4S0000C 00700F	-	-
	800 A	HGM800S 2ZT4S0000C 00800F	HGM800S 3ZT4S0000C 00800F	-	-
	HGM800H...70 kA / 460 V				
	700 A	HGM800H 2ZT4S0000C 00700F	HGM800H 3ZT4S0000C 00700F	-	-
	800 A	HGM800H 2ZT4S0000C 00800F	HGM800H 3ZT4S0000C 00800F	-	-
	HGM800L...85 kA / 460 V				
	700 A	HGM800L 2ZT4S0000C 00700F	HGM800L 3ZT4S0000C 00700F	-	-
	800 A	HGM800L 2ZT4S0000C 00800F	HGM800L 3ZT4S0000C 00800F	-	-

HGE Type Earth Leakage Circuit Breakers (ELCB)


- Normal type/Front connection
- Except for accessory, Based on ambient temperature 40 °C and frequency 50/60 Hz


30 AF	In	2 Pole	3 Pole	4 Pole (RSTN)	Rated Residual Current	
	HGE30E...16 kA / 460 V					
	16 A	HGE30E 2PG4S0000C 00016	HGE30E 3PG4S0000C 00016	HGE30E 4PG4S0000C 00016	Fixed residual type (30 mA) High speed type (Fixed operation time)	
	20 A	HGE30E 2PG4S0000C 00020	HGE30E 3PG4S0000C 00020	HGE30E 4PG4S0000C 00020		
	25 A	HGE30E 2PG4S0000C 00025	HGE30E 3PG4S0000C 00025	HGE30E 4PG4S0000C 00025		
	32 A	HGE30E 2PG4S0000C 00032	HGE30E 3PG4S0000C 00032	HGE30E 4PG4S0000C 00032		
	16 A	HGE30E 2PG5S0000C 00016	HGE30E 3PG5S0000C 00016	HGE30E 4PG5S0000C 00016	Adjustable residual type (100/300/500/1,000 mA) Time delay type (Settable delay time)	
	20 A	HGE30E 2PG5S0000C 00020	HGE30E 3PG5S0000C 00020	HGE30E 4PG5S0000C 00020		
	25 A	HGE30E 2PG5S0000C 00025	HGE30E 3PG5S0000C 00025	HGE30E 4PG5S0000C 00025		
	32 A	HGE30E 2PG5S0000C 00032	HGE30E 3PG5S0000C 00032	HGE30E 4PG5S0000C 00032		
	HGE30S...20 kA / 460 V					
	16 A	HGE30S 2PG4S0000C 00016	HGE30S 3PG4S0000C 00016	HGE30S 4PG4S0000C 00016	Fixed residual type (30 mA) High speed type (Fixed operation time)	
	20 A	HGE30S 2PG4S0000C 00020	HGE30S 3PG4S0000C 00020	HGE30S 4PG4S0000C 00020		
	25 A	HGE30S 2PG4S0000C 00025	HGE30S 3PG4S0000C 00025	HGE30S 4PG4S0000C 00025		
	32 A	HGE30S 2PG4S0000C 00032	HGE30S 3PG4S0000C 00032	HGE30S 4PG4S0000C 00032		
	16 A	HGE30S 2PG5S0000C 00016	HGE30S 3PG5S0000C 00016	HGE30S 4PG5S0000C 00016	Adjustable residual type (100/300/500/1,000 mA) Time delay type (Settable delay time)	
	20 A	HGE30S 2PG5S0000C 00020	HGE30S 3PG5S0000C 00020	HGE30S 4PG5S0000C 00020		
25 A	HGE30S 2PG5S0000C 00025	HGE30S 3PG5S0000C 00025	HGE30S 4PG5S0000C 00025			
32 A	HGE30S 2PG5S0000C 00032	HGE30S 3PG5S0000C 00032	HGE30S 4PG5S0000C 00032			
50 AF	In	2 Pole	3 Pole	4 Pole (RSTN)	Rated Residual Current	
	HGE50E...16 kA / 460 V					
	16 A	HGE50E 2PG4S0000C 00016	HGE50E 3PG4S0000C 00016	HGE50E 4PG4S0000C 00016	Fixed residual type (30mA) High speed type (Fixed operation time)	
	20 A	HGE50E 2PG4S0000C 00020	HGE50E 3PG4S0000C 00020	HGE50E 4PG4S0000C 00020		
	25 A	HGE50E 2PG4S0000C 00025	HGE50E 3PG4S0000C 00025	HGE50E 4PG4S0000C 00025		
	32 A	HGE50E 2PG4S0000C 00032	HGE50E 3PG4S0000C 00032	HGE50E 4PG4S0000C 00032		
	40 A	HGE50E 2PG4S0000C 00040	HGE50E 3PG4S0000C 00040	HGE50E 4PG4S0000C 00040		
	50 A	HGE50E 2PG4S0000C 00050	HGE50E 3PG4S0000C 00050	HGE50E 4PG4S0000C 00050		
	16 A	HGE50E 2PG5S0000C 00016	HGE50E 3PG5S0000C 00016	HGE50E 4PG5S0000C 00016	Adjustable residual type (100/300/500/1,000 mA) Time delay type (Settable delay time)	
	20 A	HGE50E 2PG5S0000C 00020	HGE50E 3PG5S0000C 00020	HGE50E 4PG5S0000C 00020		
	25 A	HGE50E 2PG5S0000C 00025	HGE50E 3PG5S0000C 00025	HGE50E 4PG5S0000C 00025		
	32 A	HGE50E 2PG5S0000C 00032	HGE50E 3PG5S0000C 00032	HGE50E 4PG5S0000C 00032		
	40 A	HGE50E 2PG5S0000C 00040	HGE50E 3PG5S0000C 00040	HGE50E 4PG5S0000C 00040		
	50 A	HGE50E 2PG5S0000C 00050	HGE50E 3PG5S0000C 00050	HGE50E 4PG5S0000C 00050		
	HGE50S...20 kA / 460 V					
	16 A	HGE50S 2PG4S0000C 00016	HGE50S 3PG4S0000C 00016	HGE50S 4PG4S0000C 00016	Fixed residual type (30 mA) High speed type (Fixed operation time)	
	20 A	HGE50S 2PG4S0000C 00020	HGE50S 3PG4S0000C 00020	HGE50S 4PG4S0000C 00020		
25 A	HGE50S 2PG4S0000C 00025	HGE50S 3PG4S0000C 00025	HGE50S 4PG4S0000C 00025			
32 A	HGE50S 2PG4S0000C 00032	HGE50S 3PG4S0000C 00032	HGE50S 4PG4S0000C 00032			
40 A	HGE50S 2PG4S0000C 00040	HGE50S 3PG4S0000C 00040	HGE50S 4PG4S0000C 00040			
50 A	HGE50S 2PG4S0000C 00050	HGE50S 3PG4S0000C 00050	HGE50S 4PG4S0000C 00050			
16 A	HGE50S 2PG5S0000C 00016	HGE50S 3PG5S0000C 00016	HGE50S 4PG5S0000C 00016	Adjustable residual type (100/300/500/1000mA) Time delay type (Settable delay time)		
20 A	HGE50S 2PG5S0000C 00020	HGE50S 3PG5S0000C 00020	HGE50S 4PG5S0000C 00020			
25 A	HGE50S 2PG5S0000C 00025	HGE50S 3PG5S0000C 00025	HGE50S 4PG5S0000C 00025			
32 A	HGE50S 2PG5S0000C 00032	HGE50S 3PG5S0000C 00032	HGE50S 4PG5S0000C 00032			
40 A	HGE50S 2PG5S0000C 00040	HGE50S 3PG5S0000C 00040	HGE50S 4PG5S0000C 00040			
50 A	HGE50S 2PG5S0000C 00050	HGE50S 3PG5S0000C 00050	HGE50S 4PG5S0000C 00050			


Ordering Information

HGE Type Earth Leakage Circuit Breakers (ELCB)

- Normal type/Front connection
- Except for accessory, Based on ambient temperature 40 °C and frequency 50/60 Hz

50 AF	In	2 Pole	3 Pole	4 Pole (RSTN)	Rated Residual Current	
	HGE50H...38 kA / 460 V					
	16 A	HGE50H 2PG4S0000C 00016	HGE50H 3PG4S0000C 00016	HGE50H 4PG4S0000C 00016	Fixed residual type (30 mA) High speed type (Fixed operation time)	
	20 A	HGE50H 2PG4S0000C 00020	HGE50H 3PG4S0000C 00020	HGE50H 4PG4S0000C 00020		
	25 A	HGE50H 2PG4S0000C 00025	HGE50H 3PG4S0000C 00025	HGE50H 4PG4S0000C 00025		
	32 A	HGE50H 2PG4S0000C 00032	HGE50H 3PG4S0000C 00032	HGE50H 4PG4S0000C 00032		
	40 A	HGE50H 2PG4S0000C 00040	HGE50H 3PG4S0000C 00040	HGE50H 4PG4S0000C 00040		
	50 A	HGE50H 2PG4S0000C 00050	HGE50H 3PG4S0000C 00050	HGE50H 4PG4S0000C 00050	Adjustable residual type (100/300/500/1,000 mA) Time delay type (Settable delay time)	
	16 A	HGE50H 2PG5S0000C 00016	HGE50H 3PG5S0000C 00016	HGE50H 4PG5S0000C 00016		
	20 A	HGE50H 2PG5S0000C 00020	HGE50H 3PG5S0000C 00020	HGE50H 4PG5S0000C 00020		
	25 A	HGE50H 2PG5S0000C 00025	HGE50H 3PG5S0000C 00025	HGE50H 4PG5S0000C 00025		
	32 A	HGE50H 2PG5S0000C 00032	HGE50H 3PG5S0000C 00032	HGE50H 4PG5S0000C 00032		
	40 A	HGE50H 2PG5S0000C 00040	HGE50H 3PG5S0000C 00040	HGE50H 4PG5S0000C 00040	Adjustable residual type (100/300/500/1,000 mA) Time delay type (Settable delay time)	
	50 A	HGE50H 2PG5S0000C 00050	HGE50H 3PG5S0000C 00050	HGE50H 4PG5S0000C 00050		
	HGE50L...55 kA / 460 V					
	16 A	HGE50L 2PG4S0000C 00016	HGE50L 3PG4S0000C 00016	HGE50L 4PG4S0000C 00016		Fixed residual type (30 mA) High speed type (Fixed operation time)
	20 A	HGE50L 2PG4S0000C 00020	HGE50L 3PG4S0000C 00020	HGE50L 4PG4S0000C 00020		
	25 A	HGE50L 2PG4S0000C 00025	HGE50L 3PG4S0000C 00025	HGE50L 4PG4S0000C 00025		
	32 A	HGE50L 2PG4S0000C 00032	HGE50L 3PG4S0000C 00032	HGE50L 4PG4S0000C 00032		
	40 A	HGE50L 2PG4S0000C 00040	HGE50L 3PG4S0000C 00040	HGE50L 4PG4S0000C 00040		
	50 A	HGE50L 2PG4S0000C 00050	HGE50L 3PG4S0000C 00050	HGE50L 4PG4S0000C 00050	Adjustable residual type (100/300/500/1,000 mA) Time delay type (Settable delay time)	
16 A	HGE50L 2PG5S0000C 00016	HGE50L 3PG5S0000C 00016	HGE50L 4PG5S0000C 00016			
20 A	HGE50L 2PG5S0000C 00020	HGE50L 3PG5S0000C 00020	HGE50L 4PG5S0000C 00020			
25 A	HGE50L 2PG5S0000C 00025	HGE50L 3PG5S0000C 00025	HGE50L 4PG5S0000C 00025			
32 A	HGE50L 2PG5S0000C 00032	HGE50L 3PG5S0000C 00032	HGE50L 4PG5S0000C 00032			
40 A	HGE50L 2PG5S0000C 00040	HGE50L 3PG5S0000C 00040	HGE50L 4PG5S0000C 00040	Adjustable residual type (100/300/500/1,000 mA) Time delay type (Settable delay time)		
50 A	HGE50L 2PG5S0000C 00050	HGE50L 3PG5S0000C 00050	HGE50L 4PG5S0000C 00050			


60 AF	In	2 Pole	3 Pole	4 Pole (RSTN)	Rated Residual Current
	HGE60E...16 kA / 460 V				
	16 A	HGE60E 2PG4S0000C 00016	HGE60E 3PG4S0000C 00016	HGE60E 4PG4S0000C 00016	Fixed residual type (30 mA) High speed type (Fixed operation time)
	20 A	HGE60E 2PG4S0000C 00020	HGE60E 3PG4S0000C 00020	HGE60E 4PG4S0000C 00020	
	25 A	HGE60E 2PG4S0000C 00025	HGE60E 3PG4S0000C 00025	HGE60E 4PG4S0000C 00025	
	32 A	HGE60E 2PG4S0000C 00032	HGE60E 3PG4S0000C 00032	HGE60E 4PG4S0000C 00032	
	40 A	HGE60E 2PG4S0000C 00040	HGE60E 3PG4S0000C 00040	HGE60E 4PG4S0000C 00040	
	50 A	HGE60E 2PG4S0000C 00050	HGE60E 3PG4S0000C 00050	HGE60E 4PG4S0000C 00050	Adjustable residual type (100/300/500/1,000 mA) Time delay type (Settable delay time)
	63 A	HGE60E 2PG4S0000C 00063	HGE60E 3PG4S0000C 00063	HGE60E 4PG4S0000C 00063	
	16 A	HGE60E 2PG5S0000C 00016	HGE60E 3PG5S0000C 00016	HGE60E 4PG5S0000C 00016	
	20 A	HGE60E 2PG5S0000C 00020	HGE60E 3PG5S0000C 00020	HGE60E 4PG5S0000C 00020	
	25 A	HGE60E 2PG5S0000C 00025	HGE60E 3PG5S0000C 00025	HGE60E 4PG5S0000C 00025	
	32 A	HGE60E 2PG5S0000C 00032	HGE60E 3PG5S0000C 00032	HGE60E 4PG5S0000C 00032	Adjustable residual type (100/300/500/1,000 mA) Time delay type (Settable delay time)
	40 A	HGE60E 2PG5S0000C 00040	HGE60E 3PG5S0000C 00040	HGE60E 4PG5S0000C 00040	
	50 A	HGE60E 2PG5S0000C 00050	HGE60E 3PG5S0000C 00050	HGE60E 4PG5S0000C 00050	
	63 A	HGE60E 2PG5S0000C 00063	HGE60E 3PG5S0000C 00063	HGE60E 4PG5S0000C 00063	


60 AF	In	2 Pole	3 Pole	4 Pole (RSTN)	Rated Residual Current
	HGE60S...20 kA / 460 V				
	16 A	HGE60S 2PG4S0000C 00016	HGE60S 3PG4S0000C 00016	HGE60S 4PG4S0000C 00016	Fixed residual type (30 mA) High speed type (Fixed operation time)
	20 A	HGE60S 2PG4S0000C 00020	HGE60S 3PG4S0000C 00020	HGE60S 4PG4S0000C 00020	
	25 A	HGE60S 2PG4S0000C 00025	HGE60S 3PG4S0000C 00025	HGE60S 4PG4S0000C 00025	
	32 A	HGE60S 2PG4S0000C 00032	HGE60S 3PG4S0000C 00032	HGE60S 4PG4S0000C 00032	
	40 A	HGE60S 2PG4S0000C 00040	HGE60S 3PG4S0000C 00040	HGE60S 4PG4S0000C 00040	
	50 A	HGE60S 2PG4S0000C 00050	HGE60S 3PG4S0000C 00050	HGE60S 4PG4S0000C 00050	
	63 A	HGE60S 2PG4S0000C 00063	HGE60S 3PG4S0000C 00063	HGE60S 4PG4S0000C 00063	
	16 A	HGE60S 2PG5S0000C 00016	HGE60S 3PG5S0000C 00016	HGE60S 4PG5S0000C 00016	Adjustable residual type (100/300/500/1,000 mA) Time delay type (Settable delay time)
	20 A	HGE60S 2PG5S0000C 00020	HGE60S 3PG5S0000C 00020	HGE60S 4PG5S0000C 00020	
	25 A	HGE60S 2PG5S0000C 00025	HGE60S 3PG5S0000C 00025	HGE60S 4PG5S0000C 00025	
	32 A	HGE60S 2PG5S0000C 00032	HGE60S 3PG5S0000C 00032	HGE60S 4PG5S0000C 00032	
	40 A	HGE60S 2PG5S0000C 00040	HGE60S 3PG5S0000C 00040	HGE60S 4PG5S0000C 00040	
	50 A	HGE60S 2PG5S0000C 00050	HGE60S 3PG5S0000C 00050	HGE60S 4PG5S0000C 00050	
	63 A	HGE60S 2PG5S0000C 00063	HGE60S 3PG5S0000C 00063	HGE60S 4PG5S0000C 00063	
	HGE60H...26 kA / 460 V				
	16 A	HGE60H 2PG4S0000C 00016	HGE60H 3PG4S0000C 00016	HGE60H 4PG4S0000C 00016	Fixed residual type (30 mA) High speed type (Fixed operation time)
	20 A	HGE60H 2PG4S0000C 00020	HGE60H 3PG4S0000C 00020	HGE60H 4PG4S0000C 00020	
	25 A	HGE60H 2PG4S0000C 00025	HGE60H 3PG4S0000C 00025	HGE60H 4PG4S0000C 00025	
	32 A	HGE60H 2PG4S0000C 00032	HGE60H 3PG4S0000C 00032	HGE60H 4PG4S0000C 00032	
	40 A	HGE60H 2PG4S0000C 00040	HGE60H 3PG4S0000C 00040	HGE60H 4PG4S0000C 00040	
	50 A	HGE60H 2PG4S0000C 00050	HGE60H 3PG4S0000C 00050	HGE60H 4PG4S0000C 00050	
	63 A	HGE60H 2PG4S0000C 00063	HGE60H 3PG4S0000C 00063	HGE60H 4PG4S0000C 00063	
	16 A	HGE60H 2PG5S0000C 00016	HGE60H 3PG5S0000C 00016	HGE60H 4PG5S0000C 00016	Adjustable residual type (100/300/500/1,000 mA) Time delay type (Settable delay time)
20 A	HGE60H 2PG5S0000C 00020	HGE60H 3PG5S0000C 00020	HGE60H 4PG5S0000C 00020		
25 A	HGE60H 2PG5S0000C 00025	HGE60H 3PG5S0000C 00025	HGE60H 4PG5S0000C 00025		
32 A	HGE60H 2PG5S0000C 00032	HGE60H 3PG5S0000C 00032	HGE60H 4PG5S0000C 00032		
40 A	HGE60H 2PG5S0000C 00040	HGE60H 3PG5S0000C 00040	HGE60H 4PG5S0000C 00040		
50 A	HGE60H 2PG5S0000C 00050	HGE60H 3PG5S0000C 00050	HGE60H 4PG5S0000C 00050		
63 A	HGE60H 2PG5S0000C 00063	HGE60H 3PG5S0000C 00063	HGE60H 4PG5S0000C 00063		
HGE60L...30 kA / 460 V					
16 A	HGE60L 2PG4S0000C 00016	HGE60L 3PG4S0000C 00016	HGE60L 4PG4S0000C 00016	Fixed residual type (30 mA) High speed type (Fixed operation time)	
20 A	HGE60L 2PG4S0000C 00020	HGE60L 3PG4S0000C 00020	HGE60L 4PG4S0000C 00020		
25 A	HGE60L 2PG4S0000C 00025	HGE60L 3PG4S0000C 00025	HGE60L 4PG4S0000C 00025		
32 A	HGE60L 2PG4S0000C 00032	HGE60L 3PG4S0000C 00032	HGE60L 4PG4S0000C 00032		
40 A	HGE60L 2PG4S0000C 00040	HGE60L 3PG4S0000C 00040	HGE60L 4PG4S0000C 00040		
50 A	HGE60L 2PG4S0000C 00050	HGE60L 3PG4S0000C 00050	HGE60L 4PG4S0000C 00050		
63 A	HGE60L 2PG4S0000C 00063	HGE60L 3PG4S0000C 00063	HGE60L 4PG4S0000C 00063		
16 A	HGE60L 2PG5S0000C 00016	HGE60L 3PG5S0000C 00016	HGE60L 4PG5S0000C 00016	Adjustable residual type (100/300/500/1,000 mA) Time delay type (Settable delay time)	
20 A	HGE60L 2PG5S0000C 00020	HGE60L 3PG5S0000C 00020	HGE60L 4PG5S0000C 00020		
25 A	HGE60L 2PG5S0000C 00025	HGE60L 3PG5S0000C 00025	HGE60L 4PG5S0000C 00025		
32 A	HGE60L 2PG5S0000C 00032	HGE60L 3PG5S0000C 00032	HGE60L 4PG5S0000C 00032		
40 A	HGE60L 2PG5S0000C 00040	HGE60L 3PG5S0000C 00040	HGE60L 4PG5S0000C 00040		
50 A	HGE60L 2PG5S0000C 00050	HGE60L 3PG5S0000C 00050	HGE60L 4PG5S0000C 00050		
63 A	HGE60L 2PG5S0000C 00063	HGE60L 3PG5S0000C 00063	HGE60L 4PG5S0000C 00063		

Ordering Information

HGE Type Earth Leakage Circuit Breakers (ELCB)

- Normal type/Front connection
- Except for accessory, Based on ambient temperature 40 °C and frequency 50/60 Hz


100 AF	In	2 Pole	3 Pole	4 Pole (RSTN)	Rated Residual Current
	HGE100E...16 kA / 460 V				
	16 A	HGE100E 2PG4S0000C 00016	HGE100E 3PG4S0000C 00016	HGE100E 4PG4S0000C 00016	Fixed residual type (30 mA) High speed type (Fixed operation time)
	20 A	HGE100E 2PG4S0000C 00020	HGE100E 3PG4S0000C 00020	HGE100E 4PG4S0000C 00020	
	25 A	HGE100E 2PG4S0000C 00025	HGE100E 3PG4S0000C 00025	HGE100E 4PG4S0000C 00025	
	32 A	HGE100E 2PG4S0000C 00032	HGE100E 3PG4S0000C 00032	HGE100E 4PG4S0000C 00032	
	40 A	HGE100E 2PG4S0000C 00040	HGE100E 3PG4S0000C 00040	HGE100E 4PG4S0000C 00040	
	50 A	HGE100E 2PG4S0000C 00050	HGE100E 3PG4S0000C 00050	HGE100E 4PG4S0000C 00050	
	63 A	HGE100E 2PG4S0000C 00063	HGE100E 3PG4S0000C 00063	HGE100E 4PG4S0000C 00063	
	75 A	HGE100E 2PG4S0000C 00075	HGE100E 3PG4S0000C 00075	HGE100E 4PG4S0000C 00075	
	80 A	HGE100E 2PG4S0000C 00080	HGE100E 3PG4S0000C 00080	HGE100E 4PG4S0000C 00080	
	100 A	HGE100E 2PG4S0000C 00100	HGE100E 3PG4S0000C 00100	HGE100E 4PG4S0000C 00100	
	16 A	HGE100E 2PG5S0000C 00016	HGE100E 3PG5S0000C 00016	HGE100E 4PG5S0000C 00016	Adjustable residual type (100/300/500/1,000 mA) Time delay type (Settable delay time)
	20 A	HGE100E 2PG5S0000C 00020	HGE100E 3PG5S0000C 00020	HGE100E 4PG5S0000C 00020	
	25 A	HGE100E 2PG5S0000C 00025	HGE100E 3PG5S0000C 00025	HGE100E 4PG5S0000C 00025	
	32 A	HGE100E 2PG5S0000C 00032	HGE100E 3PG5S0000C 00032	HGE100E 4PG5S0000C 00032	
	40 A	HGE100E 2PG5S0000C 00040	HGE100E 3PG5S0000C 00040	HGE100E 4PG5S0000C 00040	
	50 A	HGE100E 2PG5S0000C 00050	HGE100E 3PG5S0000C 00050	HGE100E 4PG5S0000C 00050	
	63 A	HGE100E 2PG5S0000C 00063	HGE100E 3PG5S0000C 00063	HGE100E 4PG5S0000C 00063	
	75 A	HGE100E 2PG5S0000C 00075	HGE100E 3PG5S0000C 00075	HGE100E 4PG5S0000C 00075	
	80 A	HGE100E 2PG5S0000C 00080	HGE100E 3PG5S0000C 00080	HGE100E 4PG5S0000C 00080	
100 A	HGE100E 2PG5S0000C 00100	HGE100E 3PG5S0000C 00100	HGE100E 4PG5S0000C 00100		
HGE100S...20 kA / 460 V					
16 A	HGE100S 2PG4S0000C 00016	HGE100S 3PG4S0000C 00016	HGE100S 4PG4S0000C 00016	Fixed residual type (30m A) High speed type (Fixed operation time)	
20 A	HGE100S 2PG4S0000C 00020	HGE100S 3PG4S0000C 00020	HGE100S 4PG4S0000C 00020		
25 A	HGE100S 2PG4S0000C 00025	HGE100S 3PG4S0000C 00025	HGE100S 4PG4S0000C 00025		
32 A	HGE100S 2PG4S0000C 00032	HGE100S 3PG4S0000C 00032	HGE100S 4PG4S0000C 00032		
40 A	HGE100S 2PG4S0000C 00040	HGE100S 3PG4S0000C 00040	HGE100S 4PG4S0000C 00040		
50 A	HGE100S 2PG4S0000C 00050	HGE100S 3PG4S0000C 00050	HGE100S 4PG4S0000C 00050		
63 A	HGE100S 2PG4S0000C 00063	HGE100S 3PG4S0000C 00063	HGE100S 4PG4S0000C 00063		
75 A	HGE100S 2PG4S0000C 00075	HGE100S 3PG4S0000C 00075	HGE100S 4PG4S0000C 00075		
80 A	HGE100S 2PG4S0000C 00080	HGE100S 3PG4S0000C 00080	HGE100S 4PG4S0000C 00080		
100 A	HGE100S 2PG4S0000C 00100	HGE100S 3PG4S0000C 00100	HGE100S 4PG4S0000C 00100		
16 A	HGE100S 2PG5S0000C 00016	HGE100S 3PG5S0000C 00016	HGE100S 4PG5S0000C 00016	Adjustable residual type (100/300/500/1,000 mA) Time delay type (Settable delay time)	
20 A	HGE100S 2PG5S0000C 00020	HGE100S 3PG5S0000C 00020	HGE100S 4PG5S0000C 00020		
25 A	HGE100S 2PG5S0000C 00025	HGE100S 3PG5S0000C 00025	HGE100S 4PG5S0000C 00025		
32 A	HGE100S 2PG5S0000C 00032	HGE100S 3PG5S0000C 00032	HGE100S 4PG5S0000C 00032		
40 A	HGE100S 2PG5S0000C 00040	HGE100S 3PG5S0000C 00040	HGE100S 4PG5S0000C 00040		
50 A	HGE100S 2PG5S0000C 00050	HGE100S 3PG5S0000C 00050	HGE100S 4PG5S0000C 00050		
63 A	HGE100S 2PG5S0000C 00063	HGE100S 3PG5S0000C 00063	HGE100S 4PG5S0000C 00063		
75 A	HGE100S 2PG5S0000C 00075	HGE100S 3PG5S0000C 00075	HGE100S 4PG5S0000C 00075		
80 A	HGE100S 2PG5S0000C 00080	HGE100S 3PG5S0000C 00080	HGE100S 4PG5S0000C 00080		
100 A	HGE100S 2PG5S0000C 00100	HGE100S 3PG5S0000C 00100	HGE100S 4PG5S0000C 00100		


100 AF	In	2 Pole	3 Pole	4 Pole (RSTN)	Rated Residual Current
	HGE100H...26 kA / 460 V				
	16 A	HGE100H 2PG4S0000C 00016	HGE100H 3PG4S0000C 00016	HGE100H 4PG4S0000C 00016	Fixed residual type (30 mA) High speed type (Fixed operation time)
	20 A	HGE100H 2PG4S0000C 00020	HGE100H 3PG4S0000C 00020	HGE100H 4PG4S0000C 00020	
	25 A	HGE100H 2PG4S0000C 00025	HGE100H 3PG4S0000C 00025	HGE100H 4PG4S0000C 00025	
	32 A	HGE100H 2PG4S0000C 00032	HGE100H 3PG4S0000C 00032	HGE100H 4PG4S0000C 00032	
	40 A	HGE100H 2PG4S0000C 00040	HGE100H 3PG4S0000C 00040	HGE100H 4PG4S0000C 00040	
	50 A	HGE100H 2PG4S0000C 00050	HGE100H 3PG4S0000C 00050	HGE100H 4PG4S0000C 00050	
	63 A	HGE100H 2PG4S0000C 00063	HGE100H 3PG4S0000C 00063	HGE100H 4PG4S0000C 00063	
	75 A	HGE100H 2PG4S0000C 00075	HGE100H 3PG4S0000C 00075	HGE100H 4PG4S0000C 00075	
	80 A	HGE100H 2PG4S0000C 00080	HGE100H 3PG4S0000C 00080	HGE100H 4PG4S0000C 00080	
	100 A	HGE100H 2PG4S0000C 00100	HGE100H 3PG4S0000C 00100	HGE100H 4PG4S0000C 00100	
	16 A	HGE100H 2PG5S0000C 00016	HGE100H 3PG5S0000C 00016	HGE100H 4PG5S0000C 00016	Adjustable residual type (100/300/500/1,000 mA) Time delay type (Settable delay time)
	20 A	HGE100H 2PG5S0000C 00020	HGE100H 3PG5S0000C 00020	HGE100H 4PG5S0000C 00020	
	25 A	HGE100H 2PG5S0000C 00025	HGE100H 3PG5S0000C 00025	HGE100H 4PG5S0000C 00025	
	32 A	HGE100H 2PG5S0000C 00032	HGE100H 3PG5S0000C 00032	HGE100H 4PG5S0000C 00032	
	40 A	HGE100H 2PG5S0000C 00040	HGE100H 3PG5S0000C 00040	HGE100H 4PG5S0000C 00040	
	50 A	HGE100H 2PG5S0000C 00050	HGE100H 3PG5S0000C 00050	HGE100H 4PG5S0000C 00050	
	63 A	HGE100H 2PG5S0000C 00063	HGE100H 3PG5S0000C 00063	HGE100H 4PG5S0000C 00063	
	75 A	HGE100H 2PG5S0000C 00075	HGE100H 3PG5S0000C 00075	HGE100H 4PG5S0000C 00075	
	80 A	HGE100H 2PG5S0000C 00080	HGE100H 3PG5S0000C 00080	HGE100H 4PG5S0000C 00080	
100 A	HGE100H 2PG5S0000C 00100	HGE100H 3PG5S0000C 00100	HGE100H 4PG5S0000C 00100		
HGE100L...30 kA / 460 V					
16 A	HGE100L 2PG4S0000C 00016	HGE100L 3PG4S0000C 00016	HGE100L 4PG4S0000C 00016	Fixed residual type (30 mA) High speed type (Fixed operation time)	
20 A	HGE100L 2PG4S0000C 00020	HGE100L 3PG4S0000C 00020	HGE100L 4PG4S0000C 00020		
25 A	HGE100L 2PG4S0000C 00025	HGE100L 3PG4S0000C 00025	HGE100L 4PG4S0000C 00025		
32 A	HGE100L 2PG4S0000C 00032	HGE100L 3PG4S0000C 00032	HGE100L 4PG4S0000C 00032		
40 A	HGE100L 2PG4S0000C 00040	HGE100L 3PG4S0000C 00040	HGE100L 4PG4S0000C 00040		
50 A	HGE100L 2PG4S0000C 00050	HGE100L 3PG4S0000C 00050	HGE100L 4PG4S0000C 00050		
63 A	HGE100L 2PG4S0000C 00063	HGE100L 3PG4S0000C 00063	HGE100L 4PG4S0000C 00063		
75 A	HGE100L 2PG4S0000C 00075	HGE100L 3PG4S0000C 00075	HGE100L 4PG4S0000C 00075		
80 A	HGE100L 2PG4S0000C 00080	HGE100L 3PG4S0000C 00080	HGE100L 4PG4S0000C 00080		
100 A	HGE100L 2PG4S0000C 00100	HGE100L 3PG4S0000C 00100	HGE100L 4PG4S0000C 00100		
16 A	HGE100L 2PG5S0000C 00016	HGE100L 3PG5S0000C 00016	HGE100L 4PG5S0000C 00016	Adjustable residual type (100/300/500/1,000 mA) Time delay type (Settable delay time)	
20 A	HGE100L 2PG5S0000C 00020	HGE100L 3PG5S0000C 00020	HGE100L 4PG5S0000C 00020		
25 A	HGE100L 2PG5S0000C 00025	HGE100L 3PG5S0000C 00025	HGE100L 4PG5S0000C 00025		
32 A	HGE100L 2PG5S0000C 00032	HGE100L 3PG5S0000C 00032	HGE100L 4PG5S0000C 00032		
40 A	HGE100L 2PG5S0000C 00040	HGE100L 3PG5S0000C 00040	HGE100L 4PG5S0000C 00040		
50 A	HGE100L 2PG5S0000C 00050	HGE100L 3PG5S0000C 00050	HGE100L 4PG5S0000C 00050		
63 A	HGE100L 2PG5S0000C 00063	HGE100L 3PG5S0000C 00063	HGE100L 4PG5S0000C 00063		
75 A	HGE100L 2PG5S0000C 00075	HGE100L 3PG5S0000C 00075	HGE100L 4PG5S0000C 00075		
80 A	HGE100L 2PG5S0000C 00080	HGE100L 3PG5S0000C 00080	HGE100L 4PG5S0000C 00080		
100 A	HGE100L 2PG5S0000C 00100	HGE100L 3PG5S0000C 00100	HGE100L 4PG5S0000C 00100		

Ordering Information

HGE Type Earth Leakage Circuit Breakers (ELCB)

- Normal type/Front connection
- Except for accessory, Based on ambient temperature 40 °C and frequency 50/60 Hz


125 AF	In	2 Pole	3 Pole	4 Pole (RSTN)	Rated Residual Current	
	HGE125E...20 kA / 460 V					
	16 A	HGE125E 2PG4S0000C 00016	HGE125E 3PG4S0000C 00016	HGE125E 4PG4S0000C 00016	Fixed residual type (30 mA) High speed type (Fixed operation time)	
	20 A	HGE125E 2PG4S0000C 00020	HGE125E 3PG4S0000C 00020	HGE125E 4PG4S0000C 00020		
	25 A	HGE125E 2PG4S0000C 00025	HGE125E 3PG4S0000C 00025	HGE125E 4PG4S0000C 00025		
	32 A	HGE125E 2PG4S0000C 00032	HGE125E 3PG4S0000C 00032	HGE125E 4PG4S0000C 00032		
	40 A	HGE125E 2PG4S0000C 00040	HGE125E 3PG4S0000C 00040	HGE125E 4PG4S0000C 00040		
	50 A	HGE125E 2PG4S0000C 00050	HGE125E 3PG4S0000C 00050	HGE125E 4PG4S0000C 00050		
	63 A	HGE125E 2PG4S0000C 00063	HGE125E 3PG4S0000C 00063	HGE125E 4PG4S0000C 00063		
	75 A	HGE125E 2PG4S0000C 00075	HGE125E 3PG4S0000C 00075	HGE125E 4PG4S0000C 00075		
	80 A	HGE125E 2PG4S0000C 00080	HGE125E 3PG4S0000C 00080	HGE125E 4PG4S0000C 00080		
	100 A	HGE125E 2PG4S0000C 00100	HGE125E 3PG4S0000C 00100	HGE125E 4PG4S0000C 00100		
	125 A	HGE125E 2PG4S0000C 00125	HGE125E 3PG4S0000C 00125	HGE125E 4PG4S0000C 00125		
	16 A	HGE125E 2PG5S0000C 00016	HGE125E 3PG5S0000C 00016	HGE125E 4PG5S0000C 00016		Adjustable residual type (100/300/500/1,000 mA) Time delay type (Settable delay time)
	20 A	HGE125E 2PG5S0000C 00020	HGE125E 3PG5S0000C 00020	HGE125E 4PG5S0000C 00020		
	25 A	HGE125E 2PG5S0000C 00025	HGE125E 3PG5S0000C 00025	HGE125E 4PG5S0000C 00025		
	32 A	HGE125E 2PG5S0000C 00032	HGE125E 3PG5S0000C 00032	HGE125E 4PG5S0000C 00032		
	40 A	HGE125E 2PG5S0000C 00040	HGE125E 3PG5S0000C 00040	HGE125E 4PG5S0000C 00040		
	50 A	HGE125E 2PG5S0000C 00050	HGE125E 3PG5S0000C 00050	HGE125E 4PG5S0000C 00050		
	63 A	HGE125E 2PG5S0000C 00063	HGE125E 3PG5S0000C 00063	HGE125E 4PG5S0000C 00063		
	75 A	HGE125E 2PG5S0000C 00075	HGE125E 3PG5S0000C 00075	HGE125E 4PG5S0000C 00075		
	80 A	HGE125E 2PG5S0000C 00080	HGE125E 3PG5S0000C 00080	HGE125E 4PG5S0000C 00080		
	100 A	HGE125E 2PG5S0000C 00100	HGE125E 3PG5S0000C 00100	HGE125E 4PG5S0000C 00100		
	125 A	HGE125E 2PG5S0000C 00125	HGE125E 3PG5S0000C 00125	HGE125E 4PG5S0000C 00125		
	HGE125S...26 kA / 460 V					
	16 A	HGE125S 2PG4S0000C 00016	HGE125S 3PG4S0000C 00016	HGE125S 4PG4S0000C 00016	Fixed residual type (30 mA) High speed type (Fixed operation time)	
	20 A	HGE125S 2PG4S0000C 00020	HGE125S 3PG4S0000C 00020	HGE125S 4PG4S0000C 00020		
	25 A	HGE125S 2PG4S0000C 00025	HGE125S 3PG4S0000C 00025	HGE125S 4PG4S0000C 00025		
	32 A	HGE125S 2PG4S0000C 00032	HGE125S 3PG4S0000C 00032	HGE125S 4PG4S0000C 00032		
40 A	HGE125S 2PG4S0000C 00040	HGE125S 3PG4S0000C 00040	HGE125S 4PG4S0000C 00040			
50 A	HGE125S 2PG4S0000C 00050	HGE125S 3PG4S0000C 00050	HGE125S 4PG4S0000C 00050			
63 A	HGE125S 2PG4S0000C 00063	HGE125S 3PG4S0000C 00063	HGE125S 4PG4S0000C 00063			
75 A	HGE125S 2PG4S0000C 00075	HGE125S 3PG4S0000C 00075	HGE125S 4PG4S0000C 00075			
80 A	HGE125S 2PG4S0000C 00080	HGE125S 3PG4S0000C 00080	HGE125S 4PG4S0000C 00080			
100 A	HGE125S 2PG4S0000C 00100	HGE125S 3PG4S0000C 00100	HGE125S 4PG4S0000C 00100			
125 A	HGE125S 2PG4S0000C 00125	HGE125S 3PG4S0000C 00125	HGE125S 4PG4S0000C 00125			
16 A	HGE125S 2PG5S0000C 00016	HGE125S 3PG5S0000C 00016	HGE125S 4PG5S0000C 00016	Adjustable residual type (100/300/500/1,000 mA) Time delay type (Settable delay time)		
20 A	HGE125S 2PG5S0000C 00020	HGE125S 3PG5S0000C 00020	HGE125S 4PG5S0000C 00020			
25 A	HGE125S 2PG5S0000C 00025	HGE125S 3PG5S0000C 00025	HGE125S 4PG5S0000C 00025			
32 A	HGE125S 2PG5S0000C 00032	HGE125S 3PG5S0000C 00032	HGE125S 4PG5S0000C 00032			
40 A	HGE125S 2PG5S0000C 00040	HGE125S 3PG5S0000C 00040	HGE125S 4PG5S0000C 00040			
50 A	HGE125S 2PG5S0000C 00050	HGE125S 3PG5S0000C 00050	HGE125S 4PG5S0000C 00050			
63 A	HGE125S 2PG5S0000C 00063	HGE125S 3PG5S0000C 00063	HGE125S 4PG5S0000C 00063			
75 A	HGE125S 2PG5S0000C 00075	HGE125S 3PG5S0000C 00075	HGE125S 4PG5S0000C 00075			
80 A	HGE125S 2PG5S0000C 00080	HGE125S 3PG5S0000C 00080	HGE125S 4PG5S0000C 00080			
100 A	HGE125S 2PG5S0000C 00100	HGE125S 3PG5S0000C 00100	HGE125S 4PG5S0000C 00100			
125 A	HGE125S 2PG5S0000C 00125	HGE125S 3PG5S0000C 00125	HGE125S 4PG5S0000C 00125			


125 AF	In	2 Pole	3 Pole	4 Pole (RSTN)	Rated Residual Current	
	HGE125H...38 kA / 460 V					
	16 A	HGE125H 2PG4S0000C 00016	HGE125H 3PG4S0000C 00016	HGE125H 4PG4S0000C 00016	Fixed residual type (30 mA) High speed type (Fixed operation time)	
	20 A	HGE125H 2PG4S0000C 00020	HGE125H 3PG4S0000C 00020	HGE125H 4PG4S0000C 00020		
	25 A	HGE125H 2PG4S0000C 00025	HGE125H 3PG4S0000C 00025	HGE125H 4PG4S0000C 00025		
	32 A	HGE125H 2PG4S0000C 00032	HGE125H 3PG4S0000C 00032	HGE125H 4PG4S0000C 00032		
	40 A	HGE125H 2PG4S0000C 00040	HGE125H 3PG4S0000C 00040	HGE125H 4PG4S0000C 00040		
	50 A	HGE125H 2PG4S0000C 00050	HGE125H 3PG4S0000C 00050	HGE125H 4PG4S0000C 00050		
	63 A	HGE125H 2PG4S0000C 00063	HGE125H 3PG4S0000C 00063	HGE125H 4PG4S0000C 00063		
	75 A	HGE125H 2PG4S0000C 00075	HGE125H 3PG4S0000C 00075	HGE125H 4PG4S0000C 00075		
	80 A	HGE125H 2PG4S0000C 00080	HGE125H 3PG4S0000C 00080	HGE125H 4PG4S0000C 00080		
	100 A	HGE125H 2PG4S0000C 00100	HGE125H 3PG4S0000C 00100	HGE125H 4PG4S0000C 00100		
	125 A	HGE125H 2PG4S0000C 00125	HGE125H 3PG4S0000C 00125	HGE125H 4PG4S0000C 00125		
	16 A	HGE125H 2PG5S0000C 00016	HGE125H 3PG5S0000C 00016	HGE125H 4PG5S0000C 00016		Adjustable residual type (100/300/500/1,000 mA) Time delay type (Settable delay time)
	20 A	HGE125H 2PG5S0000C 00020	HGE125H 3PG5S0000C 00020	HGE125H 4PG5S0000C 00020		
	25 A	HGE125H 2PG5S0000C 00025	HGE125H 3PG5S0000C 00025	HGE125H 4PG5S0000C 00025		
	32 A	HGE125H 2PG5S0000C 00032	HGE125H 3PG5S0000C 00032	HGE125H 4PG5S0000C 00032		
	40 A	HGE125H 2PG5S0000C 00040	HGE125H 3PG5S0000C 00040	HGE125H 4PG5S0000C 00040		
	50 A	HGE125H 2PG5S0000C 00050	HGE125H 3PG5S0000C 00050	HGE125H 4PG5S0000C 00050		
	63 A	HGE125H 2PG5S0000C 00063	HGE125H 3PG5S0000C 00063	HGE125H 4PG5S0000C 00063		
	75 A	HGE125H 2PG5S0000C 00075	HGE125H 3PG5S0000C 00075	HGE125H 4PG5S0000C 00075		
	80 A	HGE125H 2PG5S0000C 00080	HGE125H 3PG5S0000C 00080	HGE125H 4PG5S0000C 00080		
	100 A	HGE125H 2PG5S0000C 00100	HGE125H 3PG5S0000C 00100	HGE125H 4PG5S0000C 00100		
	125 A	HGE125H 2PG5S0000C 00125	HGE125H 3PG5S0000C 00125	HGE125H 4PG5S0000C 00125		
	HGE125L...55 kA / 460 V					
	16 A	HGE125L 2PG4S0000C 00016	HGE125L 3PG4S0000C 00016	HGE125L 4PG4S0000C 00016	Fixed residual type (30 mA) High speed type (Fixed operation time)	
	20 A	HGE125L 2PG4S0000C 00020	HGE125L 3PG4S0000C 00020	HGE125L 4PG4S0000C 00020		
	25 A	HGE125L 2PG4S0000C 00025	HGE125L 3PG4S0000C 00025	HGE125L 4PG4S0000C 00025		
	32 A	HGE125L 2PG4S0000C 00032	HGE125L 3PG4S0000C 00032	HGE125L 4PG4S0000C 00032		
	40 A	HGE125L 2PG4S0000C 00040	HGE125L 3PG4S0000C 00040	HGE125L 4PG4S0000C 00040		
	50 A	HGE125L 2PG4S0000C 00050	HGE125L 3PG4S0000C 00050	HGE125L 4PG4S0000C 00050		
	63 A	HGE125L 2PG4S0000C 00063	HGE125L 3PG4S0000C 00063	HGE125L 4PG4S0000C 00063		
	75 A	HGE125L 2PG4S0000C 00075	HGE125L 3PG4S0000C 00075	HGE125L 4PG4S0000C 00075		
	80 A	HGE125L 2PG4S0000C 00080	HGE125L 3PG4S0000C 00080	HGE125L 4PG4S0000C 00080		
	100 A	HGE125L 2PG4S0000C 00100	HGE125L 3PG4S0000C 00100	HGE125L 4PG4S0000C 00100		
	125 A	HGE125L 2PG4S0000C 00125	HGE125L 3PG4S0000C 00125	HGE125L 4PG4S0000C 00125		
	16 A	HGE125L 2PG5S0000C 00016	HGE125L 3PG5S0000C 00016	HGE125L 4PG5S0000C 00016		Adjustable residual type (100/300/500/1,000 mA) Time delay type (Settable delay time)
20 A	HGE125L 2PG5S0000C 00020	HGE125L 3PG5S0000C 00020	HGE125L 4PG5S0000C 00020			
25 A	HGE125L 2PG5S0000C 00025	HGE125L 3PG5S0000C 00025	HGE125L 4PG5S0000C 00025			
32 A	HGE125L 2PG5S0000C 00032	HGE125L 3PG5S0000C 00032	HGE125L 4PG5S0000C 00032			
40 A	HGE125L 2PG5S0000C 00040	HGE125L 3PG5S0000C 00040	HGE125L 4PG5S0000C 00040			
50 A	HGE125L 2PG5S0000C 00050	HGE125L 3PG5S0000C 00050	HGE125L 4PG5S0000C 00050			
63 A	HGE125L 2PG5S0000C 00063	HGE125L 3PG5S0000C 00063	HGE125L 4PG5S0000C 00063			
75 A	HGE125L 2PG5S0000C 00075	HGE125L 3PG5S0000C 00075	HGE125L 4PG5S0000C 00075			
80 A	HGE125L 2PG5S0000C 00080	HGE125L 3PG5S0000C 00080	HGE125L 4PG5S0000C 00080			
100 A	HGE125L 2PG5S0000C 00100	HGE125L 3PG5S0000C 00100	HGE125L 4PG5S0000C 00100			
125 A	HGE125L 2PG5S0000C 00125	HGE125L 3PG5S0000C 00125	HGE125L 4PG5S0000C 00125			

Ordering Information

HGE Type Earth Leakage Circuit Breakers (ELCB)

- Normal type/Front connection
- Except for accessory, Based on ambient temperature 40 °C and frequency 50/60 Hz


160 AF	In	2 Pole	3 Pole	4 Pole (RSTN)	Rated Residual Current	
	HGE160E...20 kA / 460 V					
	100 A	HGE160E 2PG4S0000C 00100	HGE160E 3PG4S0000C 00100	HGE160E 4PG4S0000C 00100	Fixed residual type (30 mA) High speed type (Fixed operation time)	
	125 A	HGE160E 2PG4S0000C 00125	HGE160E 3PG4S0000C 00125	HGE160E 4PG4S0000C 00125		
	150 A	HGE160E 2PG4S0000C 00150	HGE160E 3PG4S0000C 00150	HGE160E 4PG4S0000C 00150		
	160 A	HGE160E 2PG4S0000C 00160	HGE160E 3PG4S0000C 00160	HGE160E 4PG4S0000C 00160		
	100 A	HGE160E 2PG5S0000C 00100	HGE160E 3PG5S0000C 00100	HGE160E 4PG5S0000C 00100	Adjustable residual type (100/300/500/1,000 mA) Time delay type (Settable delay time)	
	125 A	HGE160E 2PG5S0000C 00125	HGE160E 3PG5S0000C 00125	HGE160E 4PG5S0000C 00125		
	150 A	HGE160E 2PG5S0000C 00150	HGE160E 3PG5S0000C 00150	HGE160E 4PG5S0000C 00150		
	160 A	HGE160E 2PG5S0000C 00160	HGE160E 3PG5S0000C 00160	HGE160E 4PG5S0000C 00160		
	HGE160S...26 kA / 460 V					
	100 A	HGE160S 2PG4S0000C 00100	HGE160S 3PG4S0000C 00100	HGE160S 4PG4S0000C 00100	Fixed residual type (30 mA) High speed type (Fixed operation time)	
	125 A	HGE160S 2PG4S0000C 00125	HGE160S 3PG4S0000C 00125	HGE160S 4PG4S0000C 00125		
	150 A	HGE160S 2PG4S0000C 00150	HGE160S 3PG4S0000C 00150	HGE160S 4PG4S0000C 00150		
	160 A	HGE160S 2PG4S0000C 00160	HGE160S 3PG4S0000C 00160	HGE160S 4PG4S0000C 00160		
	100 A	HGE160S 2PG5S0000C 00100	HGE160S 3PG5S0000C 00100	HGE160S 4PG5S0000C 00100	Adjustable residual type (100/300/500/1,000 mA) Time delay type (Settable delay time)	
	125 A	HGE160S 2PG5S0000C 00125	HGE160S 3PG5S0000C 00125	HGE160S 4PG5S0000C 00125		
	150 A	HGE160S 2PG5S0000C 00150	HGE160S 3PG5S0000C 00150	HGE160S 4PG5S0000C 00150		
	160 A	HGE160S 2PG5S0000C 00160	HGE160S 3PG5S0000C 00160	HGE160S 4PG5S0000C 00160		
	HGE160H...38 kA / 460 V					
	100 A	HGE160H 2PG4S0000C 00100	HGE160H 3PG4S0000C 00100	HGE160H 4PG4S0000C 00100	Fixed residual type (30 mA) High speed type (Fixed operation time)	
	125 A	HGE160H 2PG4S0000C 00125	HGE160H 3PG4S0000C 00125	HGE160H 4PG4S0000C 00125		
	150 A	HGE160H 2PG4S0000C 00150	HGE160H 3PG4S0000C 00150	HGE160H 4PG4S0000C 00150		
	160 A	HGE160H 2PG4S0000C 00160	HGE160H 3PG4S0000C 00160	HGE160H 4PG4S0000C 00160		
	100 A	HGE160H 2PG5S0000C 00100	HGE160H 3PG5S0000C 00100	HGE160H 4PG5S0000C 00100	Adjustable residual type (100/300/500/1,000 mA) Time delay type (Settable delay time)	
	125 A	HGE160H 2PG5S0000C 00125	HGE160H 3PG5S0000C 00125	HGE160H 4PG5S0000C 00125		
	150 A	HGE160H 2PG5S0000C 00150	HGE160H 3PG5S0000C 00150	HGE160H 4PG5S0000C 00150		
	160 A	HGE160H 2PG5S0000C 00160	HGE160H 3PG5S0000C 00160	HGE160H 4PG5S0000C 00160		
	HGE160L...55 kA / 460 V					
100 A	HGE160L 2PG4S0000C 00100	HGE160L 3PG4S0000C 00100	HGE160L 4PG4S0000C 00100	Fixed residual type (30 mA) High speed type (Fixed operation time)		
125 A	HGE160L 2PG4S0000C 00125	HGE160L 3PG4S0000C 00125	HGE160L 4PG4S0000C 00125			
150 A	HGE160L 2PG4S0000C 00150	HGE160L 3PG4S0000C 00150	HGE160L 4PG4S0000C 00150			
160 A	HGE160L 2PG4S0000C 00160	HGE160L 3PG4S0000C 00160	HGE160L 4PG4S0000C 00160			
100 A	HGE160L 2PG5S0000C 00100	HGE160L 3PG5S0000C 00100	HGE160L 4PG5S0000C 00100	Adjustable residual type (100/300/500/1,000 mA) Time delay type (Settable delay time)		
125 A	HGE160L 2PG5S0000C 00125	HGE160L 3PG5S0000C 00125	HGE160L 4PG5S0000C 00125			
150 A	HGE160L 2PG5S0000C 00150	HGE160L 3PG5S0000C 00150	HGE160L 4PG5S0000C 00150			
160 A	HGE160L 2PG5S0000C 00160	HGE160L 3PG5S0000C 00160	HGE160L 4PG5S0000C 00160			


250 AF	In	2 Pole	3 Pole	4 Pole (RSTN)	Rated Residual Current	
	HGE250E...20 kA / 460 V					
	100 A	HGE250E 2PG4S0000C 00100	HGE250E 3PG4S0000C 00100	HGE250E 4PG4S0000C 00100	Fixed residual type (30 mA) High speed type (Fixed operation time)	
	125 A	HGE250E 2PG4S0000C 00125	HGE250E 3PG4S0000C 00125	HGE250E 4PG4S0000C 00125		
	150 A	HGE250E 2PG4S0000C 00150	HGE250E 3PG4S0000C 00150	HGE250E 4PG4S0000C 00150		
	160 A	HGE250E 2PG4S0000C 00160	HGE250E 3PG4S0000C 00160	HGE250E 4PG4S0000C 00160		
	175 A	HGE250E 2PG4S0000C 00175	HGE250E 3PG4S0000C 00175	HGE250E 4PG4S0000C 00175		
	200 A	HGE250E 2PG4S0000C 00200	HGE250E 3PG4S0000C 00200	HGE250E 4PG4S0000C 00200		
	225 A	HGE250E 2PG4S0000C 00225	HGE250E 3PG4S0000C 00225	HGE250E 4PG4S0000C 00225		
	250 A	HGE250E 2PG4S0000C 00250	HGE250E 3PG4S0000C 00250	HGE250E 4PG4S0000C 00250		
	100 A	HGE250E 2PG5S0000C 00100	HGE250E 3PG5S0000C 00100	HGE250E 4PG5S0000C 00100	Adjustable residual type (100/300/500/1,000 mA) Time delay type (Settable delay time)	
	125 A	HGE250E 2PG5S0000C 00125	HGE250E 3PG5S0000C 00125	HGE250E 4PG5S0000C 00125		
	150 A	HGE250E 2PG5S0000C 00150	HGE250E 3PG5S0000C 00150	HGE250E 4PG5S0000C 00150		
	160 A	HGE250E 2PG5S0000C 00160	HGE250E 3PG5S0000C 00160	HGE250E 4PG5S0000C 00160		
	175 A	HGE250E 2PG5S0000C 00175	HGE250E 3PG5S0000C 00175	HGE250E 4PG5S0000C 00175		
	200 A	HGE250E 2PG5S0000C 00200	HGE250E 3PG5S0000C 00200	HGE250E 4PG5S0000C 00200		
	225 A	HGE250E 2PG5S0000C 00225	HGE250E 3PG5S0000C 00225	HGE250E 4PG5S0000C 00225		
	250 A	HGE250E 2PG5S0000C 00250	HGE250E 3PG5S0000C 00250	HGE250E 4PG5S0000C 00250		
	HGE250S...26 kA / 460 V					
	100 A	HGE250S 2PG4S0000C 00100	HGE250S 3PG4S0000C 00100	HGE250S 4PG4S0000C 00100	Fixed residual type (30 mA) High speed type (Fixed operation time)	
	125 A	HGE250S 2PG4S0000C 00125	HGE250S 3PG4S0000C 00125	HGE250S 4PG4S0000C 00125		
	150 A	HGE250S 2PG4S0000C 00150	HGE250S 3PG4S0000C 00150	HGE250S 4PG4S0000C 00150		
	160 A	HGE250S 2PG4S0000C 00160	HGE250S 3PG4S0000C 00160	HGE250S 4PG4S0000C 00160		
	175 A	HGE250S 2PG4S0000C 00175	HGE250S 3PG4S0000C 00175	HGE250S 4PG4S0000C 00175		
	200 A	HGE250S 2PG4S0000C 00200	HGE250S 3PG4S0000C 00200	HGE250S 4PG4S0000C 00200		
	225 A	HGE250S 2PG4S0000C 00225	HGE250S 3PG4S0000C 00225	HGE250S 4PG4S0000C 00225		
	250 A	HGE250S 2PG4S0000C 00250	HGE250S 3PG4S0000C 00250	HGE250S 4PG4S0000C 00250		
	100 A	HGE250S 2PG5S0000C 00100	HGE250S 3PG5S0000C 00100	HGE250S 4PG5S0000C 00100	Adjustable residual type (100/300/500/1,000 mA) Time delay type (Settable delay time)	
	125 A	HGE250S 2PG5S0000C 00125	HGE250S 3PG5S0000C 00125	HGE250S 4PG5S0000C 00125		
150 A	HGE250S 2PG5S0000C 00150	HGE250S 3PG5S0000C 00150	HGE250S 4PG5S0000C 00150			
160 A	HGE250S 2PG5S0000C 00160	HGE250S 3PG5S0000C 00160	HGE250S 4PG5S0000C 00160			
175 A	HGE250S 2PG5S0000C 00175	HGE250S 3PG5S0000C 00175	HGE250S 4PG5S0000C 00175			
200 A	HGE250S 2PG5S0000C 00200	HGE250S 3PG5S0000C 00200	HGE250S 4PG5S0000C 00200			
225 A	HGE250S 2PG5S0000C 00225	HGE250S 3PG5S0000C 00225	HGE250S 4PG5S0000C 00225			
250 A	HGE250S 2PG5S0000C 00250	HGE250S 3PG5S0000C 00250	HGE250S 4PG5S0000C 00250			

Ordering Information

HGE Type Earth Leakage Circuit Breakers (ELCB)

- Normal type/Front connection
- Except for accessory, Based on ambient temperature 40 °C and frequency 50/60 Hz



250 AF	In	2 Pole	3 Pole	4 Pole (RSTN)	Rated Residual Current	
	HGE250H...38 kA / 460 V					
	100 A	HGE250H 2PG4S0000C 00100	HGE250H 3PG4S0000C 00100	HGE250H 4PG4S0000C 00100	Fixed residual type (30 mA) High speed type (Fixed operation time)	
	125 A	HGE250H 2PG4S0000C 00125	HGE250H 3PG4S0000C 00125	HGE250H 4PG4S0000C 00125		
	150 A	HGE250H 2PG4S0000C 00150	HGE250H 3PG4S0000C 00150	HGE250H 4PG4S0000C 00150		
	160 A	HGE250H 2PG4S0000C 00160	HGE250H 3PG4S0000C 00160	HGE250H 4PG4S0000C 00160		
	175 A	HGE250H 2PG4S0000C 00175	HGE250H 3PG4S0000C 00175	HGE250H 4PG4S0000C 00175		
	200 A	HGE250H 2PG4S0000C 00200	HGE250H 3PG4S0000C 00200	HGE250H 4PG4S0000C 00200		
	225 A	HGE250H 2PG4S0000C 00225	HGE250H 3PG4S0000C 00225	HGE250H 4PG4S0000C 00225		
	250 A	HGE250H 2PG4S0000C 00250	HGE250H 3PG4S0000C 00250	HGE250H 4PG4S0000C 00250		
	100 A	HGE250H 2PG5S0000C 00100	HGE250H 3PG5S0000C 00100	HGE250H 4PG5S0000C 00100	Adjustable residual type (100/300/500/1,000 mA) Time delay type (Settable delay time)	
	125 A	HGE250H 2PG5S0000C 00125	HGE250H 3PG5S0000C 00125	HGE250H 4PG5S0000C 00125		
	150 A	HGE250H 2PG5S0000C 00150	HGE250H 3PG5S0000C 00150	HGE250H 4PG5S0000C 00150		
	160 A	HGE250H 2PG5S0000C 00160	HGE250H 3PG5S0000C 00160	HGE250H 4PG5S0000C 00160		
	175 A	HGE250H 2PG5S0000C 00175	HGE250H 3PG5S0000C 00175	HGE250H 4PG5S0000C 00175		
	200 A	HGE250H 2PG5S0000C 00200	HGE250H 3PG5S0000C 00200	HGE250H 4PG5S0000C 00200		
	225 A	HGE250H 2PG5S0000C 00225	HGE250H 3PG5S0000C 00225	HGE250H 4PG5S0000C 00225		
	250 A	HGE250H 2PG5S0000C 00250	HGE250H 3PG5S0000C 00250	HGE250H 4PG5S0000C 00250		
	HGE250L...55 kA / 460 V					
	100 A	HGE250L 2PG4S0000C 00100	HGE250L 3PG4S0000C 00100	HGE250L 4PG4S0000C 00100	Fixed residual type (30 mA) High speed type (Fixed operation time)	
	125 A	HGE250L 2PG4S0000C 00125	HGE250L 3PG4S0000C 00125	HGE250L 4PG4S0000C 00125		
	150 A	HGE250L 2PG4S0000C 00150	HGE250L 3PG4S0000C 00150	HGE250L 4PG4S0000C 00150		
	160 A	HGE250L 2PG4S0000C 00160	HGE250L 3PG4S0000C 00160	HGE250L 4PG4S0000C 00160		
	175 A	HGE250L 2PG4S0000C 00175	HGE250L 3PG4S0000C 00175	HGE250L 4PG4S0000C 00175		
	200 A	HGE250L 2PG4S0000C 00200	HGE250L 3PG4S0000C 00200	HGE250L 4PG4S0000C 00200		
	225 A	HGE250L 2PG4S0000C 00225	HGE250L 3PG4S0000C 00225	HGE250L 4PG4S0000C 00225		
	250 A	HGE250L 2PG4S0000C 00250	HGE250L 3PG4S0000C 00250	HGE250L 4PG4S0000C 00250		
100 A	HGE250L 2PG5S0000C 00100	HGE250L 3PG5S0000C 00100	HGE250L 4PG5S0000C 00100	Adjustable residual type (100/300/500/1,000 mA) Time delay type (Settable delay time)		
125 A	HGE250L 2PG5S0000C 00125	HGE250L 3PG5S0000C 00125	HGE250L 4PG5S0000C 00125			
150 A	HGE250L 2PG5S0000C 00150	HGE250L 3PG5S0000C 00150	HGE250L 4PG5S0000C 00150			
160 A	HGE250L 2PG5S0000C 00160	HGE250L 3PG5S0000C 00160	HGE250L 4PG5S0000C 00160			
175 A	HGE250L 2PG5S0000C 00175	HGE250L 3PG5S0000C 00175	HGE250L 4PG5S0000C 00175			
200 A	HGE250L 2PG5S0000C 00200	HGE250L 3PG5S0000C 00200	HGE250L 4PG5S0000C 00200			
225 A	HGE250L 2PG5S0000C 00225	HGE250L 3PG5S0000C 00225	HGE250L 4PG5S0000C 00225			
250 A	HGE250L 2PG5S0000C 00250	HGE250L 3PG5S0000C 00250	HGE250L 4PG5S0000C 00250			

400 AF	In	2 Pole	3 Pole	4 Pole (RSTN)	Rated Residual Current	
	HGE400E...38 kA / 460 V					
	250 A	HGE400E 2PG4S0000C 00250	HGE400E 3PG4S0000C 00250	HGE400E 4PG4S0000C 00250	Fixed residual type (30 mA) High speed type (Fixed operation time)	
	300 A	HGE400E 2PG4S0000C 00300	HGE400E 3PG4S0000C 00300	HGE400E 4PG4S0000C 00300		
	350 A	HGE400E 2PG4S0000C 00350	HGE400E 3PG4S0000C 00350	HGE400E 4PG4S0000C 00350		
	400 A	HGE400E 2PG4S0000C 00400	HGE400E 3PG4S0000C 00400	HGE400E 4PG4S0000C 00400		
	250 A	HGE400E 2PG5S0000C 00250	HGE400E 3PG5S0000C 00250	HGE400E 4PG5S0000C 00250	Adjustable residual type (100/300/500/1,000 mA) Time delay type (Settable delay time)	
	300 A	HGE400E 2PG5S0000C 00300	HGE400E 3PG5S0000C 00300	HGE400E 4PG5S0000C 00300		
	350 A	HGE400E 2PG5S0000C 00350	HGE400E 3PG5S0000C 00350	HGE400E 4PG5S0000C 00350		
	400 A	HGE400E 2PG5S0000C 00400	HGE400E 3PG5S0000C 00400	HGE400E 4PG5S0000C 00400		
	HGE400S...50 kA / 460 V					
	250 A	HGE400S 2PG4S0000C 00250	HGE400S 3PG4S0000C 00250	HGE400S 4PG4S0000C 00250	Fixed residual type (30 mA) High speed type (Fixed operation time)	
	300 A	HGE400S 2PG4S0000C 00300	HGE400S 3PG4S0000C 00300	HGE400S 4PG4S0000C 00300		
	350 A	HGE400S 2PG4S0000C 00350	HGE400S 3PG4S0000C 00350	HGE400S 4PG4S0000C 00350		
	400 A	HGE400S 2PG4S0000C 00400	HGE400S 3PG4S0000C 00400	HGE400S 4PG4S0000C 00400		
	250 A	HGE400S 2PG5S0000C 00250	HGE400S 3PG5S0000C 00250	HGE400S 4PG5S0000C 00250	Adjustable residual type (100/300/500/1,000 mA) Time delay type (Settable delay time)	
	300 A	HGE400S 2PG5S0000C 00300	HGE400S 3PG5S0000C 00300	HGE400S 4PG5S0000C 00300		
350 A	HGE400S 2PG5S0000C 00350	HGE400S 3PG5S0000C 00350	HGE400S 4PG5S0000C 00350			
400 A	HGE400S 2PG5S0000C 00400	HGE400S 3PG5S0000C 00400	HGE400S 4PG5S0000C 00400			
HGE400H...70 kA / 460 V						
250 A	HGE400H 2PG4S0000C 00250	HGE400H 3PG4S0000C 00250	HGE400H 4PG4S0000C 00250	Fixed residual type (30 mA) High speed type (Fixed operation time)		
300 A	HGE400H 2PG4S0000C 00300	HGE400H 3PG4S0000C 00300	HGE400H 4PG4S0000C 00300			
350 A	HGE400H 2PG4S0000C 00350	HGE400H 3PG4S0000C 00350	HGE400H 4PG4S0000C 00350			
400 A	HGE400H 2PG4S0000C 00400	HGE400H 3PG4S0000C 00400	HGE400H 4PG4S0000C 00400			
250 A	HGE400H 2PG5S0000C 00250	HGE400H 3PG5S0000C 00250	HGE400H 4PG5S0000C 00250	Adjustable residual type (100/300/500/1,000 mA) Time delay type (Settable delay time)		
300 A	HGE400H 2PG5S0000C 00300	HGE400H 3PG5S0000C 00300	HGE400H 4PG5S0000C 00300			
350 A	HGE400H 2PG5S0000C 00350	HGE400H 3PG5S0000C 00350	HGE400H 4PG5S0000C 00350			
400 A	HGE400H 2PG5S0000C 00400	HGE400H 3PG5S0000C 00400	HGE400H 4PG5S0000C 00400			
HGE400L...85 kA / 460 V						
250 A	HGE400L 2PG4S0000C 00250	HGE400L 3PG4S0000C 00250	HGE400L 4PG4S0000C 00250	Fixed residual type (30 mA) High speed type (Fixed operation time)		
300 A	HGE400L 2PG4S0000C 00300	HGE400L 3PG4S0000C 00300	HGE400L 4PG4S0000C 00300			
350 A	HGE400L 2PG4S0000C 00350	HGE400L 3PG4S0000C 00350	HGE400L 4PG4S0000C 00350			
400 A	HGE400L 2PG4S0000C 00400	HGE400L 3PG4S0000C 00400	HGE400L 4PG4S0000C 00400			
250 A	HGE400L 2PG5S0000C 00250	HGE400L 3PG5S0000C 00250	HGE400L 4PG5S0000C 00250	Adjustable residual type (100/300/500/1,000 mA) Time delay type (Settable delay time)		
300 A	HGE400L 2PG5S0000C 00300	HGE400L 3PG5S0000C 00300	HGE400L 4PG5S0000C 00300			
350 A	HGE400L 2PG5S0000C 00350	HGE400L 3PG5S0000C 00350	HGE400L 4PG5S0000C 00350			
400 A	HGE400L 2PG5S0000C 00400	HGE400L 3PG5S0000C 00400	HGE400L 4PG5S0000C 00400			

Ordering Information

HGE Type Earth Leakage Circuit Breakers (ELCB)

- Normal type/Front connection
- Except for accessory, Based on ambient temperature 40 °C and frequency 50/60 Hz

630 AF	In	2 Pole	3 Pole	Rated Residual Current	
	HGE630E...38 kA / 460 V				
	500 A	HGE630E 2PG4S0000C 00500	HGE630E 3PG4S0000C 00500	Fixed residual type (30 mA)	
	630 A	HGE630E 2PG4S0000C 00630	HGE630E 3PG4S0000C 00630	High speed type (Fixed operation time)	
	500 A	HGE630E 2PG5S0000C 00500	HGE630E 3PG5S0000C 00500	Adjustable residual type (100/300/500/1,000 mA)	
	630 A	HGE630E 2PG5S0000C 00630	HGE630E 3PG5S0000C 00630	Time delay type (Settable delay time)	
	HGE630S...50 kA / 460 V				
	500 A	HGE630S 2PG4S0000C 00500	HGE630S 3PG4S0000C 00500	Fixed residual type (30 mA)	
	630 A	HGE630S 2PG4S0000C 00630	HGE630S 3PG4S0000C 00630	High speed type (Fixed operation time)	
	500 A	HGE630S 2PG5S0000C 00500	HGE630S 3PG5S0000C 00500	Adjustable residual type (100/300/500/1,000 mA)	
	630 A	HGE630S 2PG5S0000C 00630	HGE630S 3PG5S0000C 00630	Time delay type (Settable delay time)	
	HGE630H...70 kA / 460 V				
	500 A	HGE630H 2PG4S0000C 00500	HGE630H 3PG4S0000C 00500	Fixed residual type (30 mA)	
	630 A	HGE630H 2PG4S0000C 00630	HGE630H 3PG4S0000C 00630	High speed type (Fixed operation time)	
	500 A	HGE630H 2PG5S0000C 00500	HGE630H 3PG5S0000C 00500	Adjustable residual type (100/300/500/1,000 mA)	
	630 A	HGE630H 2PG5S0000C 00630	HGE630H 3PG5S0000C 00630	Time delay type (Settable delay time)	
	HGE630L...85 kA / 460 V				
	500 A	HGE630L 2PG4S0000C 00500	HGE630L 3PG4S0000C 00500	Fixed residual type (30 mA)	
	630 A	HGE630L 2PG4S0000C 00630	HGE630L 3PG4S0000C 00630	High speed type (Fixed operation time)	
	500 A	HGE630L 2PG5S0000C 00500	HGE630L 3PG5S0000C 00500	Adjustable residual type (100/300/500/1,000 mA)	
	630 A	HGE630L 2PG5S0000C 00630	HGE630L 3PG5S0000C 00630	Time delay type (Settable delay time)	
	800 AF	In	2 Pole	3 Pole	Rated Residual Current
		HGE800S...50 kA / 460 V			
		700 A	HGE800S 2PG4S0000C 00700	HGE800S 3PG4S0000C 00700	Fixed residual type (30 mA)
		800 A	HGE800S 2PG4S0000C 00800	HGE800S 3PG4S0000C 00800	High speed type (Fixed operation time)
700 A		HGE800S 2PG5S0000C 00700	HGE800S 3PG5S0000C 00700	Adjustable residual type (100/300/500/1,000 mA)	
800 A		HGE800S 2PG5S0000C 00800	HGE800S 3PG5S0000C 00800	Time delay type (Settable delay time)	
HGE800H...70 kA / 460 V					
700 A		HGE800H 2PG4S0000C 00700	HGE800H 3PG4S0000C 00700	Fixed residual type (30 mA)	
800 A		HGE800H 2PG4S0000C 00800	HGE800H 3PG4S0000C 00800	High speed type (Fixed operation time)	
700 A		HGE800H 2PG5S0000C 00700	HGE800H 3PG5S0000C 00700	Adjustable residual type (100/300/500/1,000 mA)	
800 A		HGE800H 2PG5S0000C 00800	HGE800H 3PG5S0000C 00800	Time delay type (Settable delay time)	
HGE800L...85 kA / 460 V					
700 A		HGE800L 2PG4S0000C 00700	HGE800L 3PG4S0000C 00700	Fixed residual type (30 mA)	
800 A		HGE800L 2PG4S0000C 00800	HGE800L 3PG4S0000C 00800	High speed type (Fixed operation time)	
700 A		HGE800L 2PG5S0000C 00700	HGE800L 3PG5S0000C 00700	Adjustable residual type (100/300/500/1,000 mA)	
800 A		HGE800L 2PG5S0000C 00800	HGE800L 3PG5S0000C 00800	Time delay type (Settable delay time)	

HGM/HGE Type Accessory Separately

HGM/HGE100

Mounting

		2 Pole	3 Pole	4 Pole
Plug-in	TDM (LINE/LOAD)	-	TDM 10GM P3	-
	TDM (LINE Only)	-	TDM 10GM F3	-
	TDF (LINE Only)	-	TDF 10GM 3	-
	TDA (1 row)	-	TDA 10GM S3	-
	TDA (2 row)	TDA 10GM D2	TDA 10GM D3	-
Conn. block (CBM)		CBM 10GM 2	CBM 10GM	-
Terminal busbar (TBB)	Straight busbar	-	-	-
	Expanded busbar	-	-	-
Rear terminal (RCT)	(≤ 50 A)	RCT 05GM F2	RCT 05GM F3	RCT 05GM F4
	(> 50 A)	RCT 10GM F2	RCT 10GM F3	RCT 10GM F4
Cage termina (CTB)	(≤ 50 A)	CTB 10GM 2S50	CTB 10GM 3S50	CTB 10GM 4S50
	(> 50 A)	CTB 10GM 2S100	CTB 10GM 3S100	CTB 10GM 4S100
DIN rail adapter (DRA)		DRA 10GM	DRA 10GM	DRA 10GM

Internal Accessory

		Auxiliary Switch (AUX)	Alarm Switch (ALT)	Auxiliary/Alarm Switch (AXT)
Indication contacts		AUX 10GM C1	ALT 10GM L1	AXT 10GM L1
		AUX 10GM C2	ALT 10GM R1	AXT 10GM R1
		Shunt Trip (SHT)	Undervoltage (UVT)	
Remote tripping		SHT 10GM DC24 V	UVT 10GM DC24 V	
		SHT 10GM DC100 - 125 V	UVT 10GM DC100 - 125 V	
		SHT 10GM DC48 V	UVT 10GM DC48 V	
		SHT 10GM DC60 V	UVT 10GM AC100 - 120 V	
		SHT 10GM AC100 - 120 V	UVT 10GM AC200 - 230 V	
		SHT 10GM AC200 - 230 V	UVT 10GM AC380 - 415 V	
		SHT 10GM AC380 - 415 V	UVT 10GM AC440 - 480 V	
		SHT 10GM AC440 - 480 V	-	

External Accessory

		Front Type (TFG)	Extended Type (TFH)	
Rotary handle	Up - Line	TFG 10GM U	TFH 10GM	
	Right - Line	TFG 10GM R	TFH 10GM	
	Left - Line	TFG 10GM L	TFH 10GM	
		2 Pole	3 Pole	4 Pole
Motor operator ¹⁾		-	MOT 10GM DC24V	
		-	MOT 10GM AC/DC110V	
		-	MOT 10GM AC/DC240V	
Terminal cover	Small	TCF 10GM S2	TCF 10GM S3	TCF 10GM S4
	Large	TCF 10GM L2	TCF 10GM L3	TCF 10GM L4
		2 Pole	3 Pole	4 Pole RSTN/NRST
Locking device	Padlock	PLD 10GM	PLD 10GM	PLD 10GM
	Mecahcnical interlock	MIF 10GM 2	MIF 10GM 3	MIF 10GM R4/MIF 10GM N4
		2 Pole	3 Pole	4 Pole
Interpole barrier		TQQ 10GM 2	TQQ 10GM 3	TQQ 10GM 4
Auxiliary handle			-	

※ 1) HGM only.

Ordering Information

HGM/HGE Type Accessory Separately

HGM/HGE125

Mounting

		2 Pole	3 Pole	4 Pole
Plug-in	TDM (LINE/LOAD)	-	TDM 12GM P3	-
	TDM (LINE Only)	-	TDM 12GM F3	-
	TDF (LINE Only)	-	TDF 12GM 3	-
	TDA (1 row)	-	TDA 12GM S3	-
	TDA (2 row)	-	TDA 12GM D3	-
Conn. block (CBM)		-	CBM 10GM	-
Terminal busbar (TBB)	Straight busbar	-	-	-
	Expanded busbar	-	-	-
Rear terminal (RCT)		RCT 12GM F2	RCT 12GM F3	RCT 12GM F4
Cage terminal (CTB)		CTB 12GM 2S	CTB 12GM 3S	CTB 12GM 4S
DIN rail adapter (DRA)		-	-	-

Internal Accessory

		Auxiliary Switch (AUX)	Alarm Switch (ALT)	Auxiliary/Alarm Switch (AXT)
Indication contacts		AUX 10GM C1	ALT 10GM L1	AXT 10GM L1
		AUX 10GM C2	ALT 10GM R1	AXT 10GM R1
		Shunt Trip (SHT)	Undervoltage (UVT)	
Remote tripping		SHT 10GM DC24 V	UVT 10GM DC24 V	
		SHT 10GM DC100 - 125 V	UVT 10GM DC100 - 125 V	
		SHT 10GM DC48 V	UVT 10GM DC48 V	
		SHT 10GM DC60 V	UVT 10GM AC100 - 120 V	
		SHT 10GM AC100 - 120 V	UVT 10GM AC200 - 230 V	
		SHT 10GM AC200 - 230 V	UVT 10GM AC380 - 415 V	
		SHT 10GM AC380 - 415 V	UVT 10GM AC440 - 480 V	
		SHT 10GM AC440 - 480 V	-	

External Accessory

		Front Type (TFG)	Extended Type (TFH)	
Rotary handle	Up - Line	TFG 12GM U	TFH 12GM	
	Right - Line	TFG 12GM R	TFH 12GM	
	Left - Line	TFG 12GM L	TFH 12GM	
		2 Pole	3 Pole	4 Pole
Motor operator ¹⁾		-	MOT 12GM DC24 V	
		-	MOT 12GM AC/DC110 V	
		-	MOT 12GM AC/DC240 V	
Terminal cover	Small	TCF 12GM S2	TCF 12GM S3	TCF 12GM S4
	Large	TCF 12GM L2	TCF 12GM L3	TCF 12GM L4
Locking device	Padlock	PLD 10GM	PLD 10GM	PLD 10GM
	Mecahnical interlock	MIF 12GM 2	MIF 12GM 3	MIF 12GM R4/MIF 12GM N4
Interpole barrier		TQQ 10GM 2	TQQ 10GM 3	TQQ 10GM 4
Auxiliary handle		-		

※ ¹⁾ HGM only.

HGM/HGE250

Mounting

		2 Pole	3 Pole	4 Pole
Plug-in	TDM (LINE/LOAD)	-	TDM 25GM P3	-
	TDM (LINE Only)	-	TDM 25GM F3	-
	TDF (LINE Only)	-	-	-
	TDA (1 row)	-	-	-
	TDA (2 row)	-	-	-
Conn. block (CBM)		-	CBM 10GM	-
Terminal busbar (TBB)	Straight busbar	-	TBB 25GP 3S	TBB 25GP 4S
	Expanded busbar	-	TBB 25GP 3E4S	TBB 25GP 4E4S
Rear terminal (RCT)	Line	RCT 25GM F2 LINE	RCT 25GM F3 LINE	RCT 25GM F4 LINE
	Load	RCT 25GM F2 LOAD	RCT 25GM F3 LOAD	RCT 25GM F4 LOAD
Cage terminal (CTB)		CTB 25GM 2S	CTB 25GM 3S	CTB 25GM 4S
		-	-	-
DIN rail adapter (DRA)		-	-	-

Internal Accessory

		Auxiliary Switch (AUX)	Alarm Switch (ALT)	Auxiliary/Alarm Switch (AXT)
Indication contacts		AUX 10GM C1	ALT 10GM L1	AXT 10GM L1
		AUX 10GM C2	ALT 10GM R1	AXT 10GM R1
		Shunt Trip (SHT)	Undervoltage (UVT)	
Remote tripping		SHT 10GM DC24 V	UVT 10GM DC24 V	
		SHT 10GM DC100 - 125 V	UVT 10GM DC100 - 125 V	
		SHT 10GM DC48 V	UVT 10GM DC48 V	
		SHT 10GM DC60 V	UVT 10GM AC100 - 120 V	
		SHT 10GM AC100 - 120 V	UVT 10GM AC200 - 230 V	
		SHT 10GM AC200 - 230 V	UVT 10GM AC380 - 415 V	
		SHT 10GM AC380 - 415 V	UVT 10GM AC440 - 480 V	
		SHT 10GM AC440 - 480 V	-	

External Accessory

		Front Type (TFG)	Extended Type (TFH)	
Rotary handle	Up - Line	TFG 25GM U	TFH 25GM	
	Right - Line	TFG 25GM R	TFH 25GM	
	Left - Line	TFG 25GM L	TFH 25GM	
		2 Pole	3 Pole	4 Pole
Motor operator ¹⁾		-	MOT 25GM DC24 V	
		-	MOT 25GM AC/DC110 V	
		-	MOT 25GM AC/DC240 V	
Terminal cover	Small	TCF 25GM S2	TCF 25GM S3	TCF 25GM S4
	Large	TCF 25GM L2	TCF 25GM L3	TCF 25GM L4
		2 Pole	3 Pole	4 Pole RSTN/NRST
Locking device	Padlock	PLD 10GM	PLD 10GM	PLD 10GM
	Mecahnical interlock	MIF 25GM 2	MIF 25GM 3	MIF 25GM R4/MIF 25GM N4
		2 Pole	3 Pole	4 Pole
Interpole barrier		TQQ 25GM 2	TQQ 25GM 3	TQQ 25GM 4
Auxiliary handle			-	

※ 1) HGM only.

Ordering Information

HGM/HGE Type Accessory Separately

HGM/HGE400

Mounting

		3 Pole	4 Pole
Plug-in	TDM (LINE/LOAD)	TDM 40GM P3	-
	TDM (LINE Only)	TDM 40GM F3	-
Conn. block (CBM)		CBM 10GM	-
Terminal busbar (TBB)	Straight busbar	-	-
	Expanded busbar	TBB 40GM 3E59	TBB 40GM 4E59
Rear terminal (RCT)	Line	RCT 40GM F3 LINE	RCT 40GM F4 LINE
	Load	RCT 40GM F3 LOAD	RCT 40GM F4 LOAD
DIN rail adapter (DRA)		CTB 40GM 3S	CTB 40GM 4S

Internal Accessory

		Auxiliary Switch (AUX)	Alarm Switch (ALT)
Indication contacts		AUX 40GM C1	ALT 40GM L1
		Shunt Trip (SHT)	Undervoltage (UVT)
Remote tripping		SHT 40GM DC24 V	UVT 40GM DC24 V
		SHT 40GM DC100 - 125 V	UVT 40GM DC110 - 125 V
		SHT 40GM AC100 - 120 V	UVT 40GM AC100 - 125 V
		SHT 40GM AC200 - 230 V	UVT 40GM AC220 - 230 V
		SHT 40GM AC380 - 415 V	UVT 40GM AC380 - 415 V
		SHT 40GM AC440 - 480 V	UVT 40GM AC440 - 480 V

External Accessory

		Front Type (TFG)	Extended Type (TFH)
Rotary handle	Up - Line	TFG 40GM U	TFH 40GM
	Right - Line	TFG 40GM R	TFH 40GM
	Left - Line	TFG 40GM L	TFH 40GM
		3 Pole	4 Pole
Motor operator ¹⁾		MOT 40GM DC24 V	
		MOT 40GM AC/DC110 V	
		MOT 40GM AC/DC240 V	
Terminal cover	Small	TCF 40GM S3	TCF 40GM S4
	Large	TCF 40GM L3	TCF 40GM L4
Terminal cover	Padlock	PLD 40GM	PLD 40GM
	Mecahnical interlock	MIF 40GM 3	MIF 40GM R4/MIF 40GM N4
Interpole barrier		TQQ 63GP 3	TQQ 63GP 4
Auxiliary handle		THA 48GM	

※ ¹⁾ HGM only.

HGM/HGE800

Mounting

		3 Pole	4 Pole
Plug-in	TDM (LINE/LOAD)	TDM 80GM P3	-
	TDM (LINE Only)	TDM 80GP F3	-
Conn. block (CBM)		CBM 10GM	-
Terminal busbar (TBB)	Straight busbar	TBB 80GM 3S	TBB 80GM 4S
	Expanded busbar	-	-
Rear terminal (RCT)	Line	RCT 80GM F3 LINE	RCT 80GM F4 LINE
	Load	RCT 80GM F3 LOAD	RCT 80GM F4 LOAD
DIN rail adapter (DRA)		CTB 80GM 3S	CTB 80GM 4S

Internal Accessory

		Auxiliary Switch (AUX)	Alarm Switch (ALT)
Indication contacts		AUX 40GM C1	ALT 40GM L1
		Shunt Trip (SHT)	Undervoltage (UVT)
Remote tripping		SHT 40GM DC24 V	UVT 40GM DC24 V
		SHT 40GM DC100 - 125 V	UVT 40GM DC110 - 125 V
		SHT 40GM AC100 - 120 V	UVT 40GM AC100 - 125 V
		SHT 40GM AC200 - 230 V	UVT 40GM AC220 - 230 V
		SHT 40GM AC380 - 415 V	UVT 40GM AC380 - 415 V
		SHT 40GM AC440 - 480 V	UVT 40GM AC440 - 480 V

External Accessory

		Front Type (TFG)	Extended Type (TFH)
Rotary handle	Up - Line	TFG 80GM U	TFH 80GM
	Right - Line	TFG 80GM R	TFH 80GM
	Left - Line	TFG 80GM L	TFH 80GM
		3 Pole	4 Pole
Motor operator ¹⁾		MOT 80GM DC24 V	
		MOT 80GM AC/DC110 V	
		MOT 80GM AC/DC240 V	
Terminal cover	Small	TCF 80GM S3	TCF 80GM S4
	Large	TCF 80GM L3	TCF 80GM L4
Terminal cover	Padlock	PLD 40GM	PLD 40GM
	Mecahnical interlock	MIF 800GM 3	MIF 80GM R4/MIF 80GM N4
Interpole barrier		TQQ 63GP 3	TQQ 63GP 4
Auxiliary handle		THA 48GM	

※ 1) HGM only.

Maintenance & Certifications

Service Environment

- 159 Storage & Transportation
- 160 Installations
- 164 Maintenance

Certifications

- 165 Molded Case Circuit Breakers (MCCB)
- 167 Earth Leakage Circuit Breakers (ELCB)

Service Environment

Storage & Transportation

Storage Precaution



- Do not store in an environment containing corrosive gases (ammonia, sulfur etc)




- Do not store under high humidity



- Do not store under direct sunlight



- Do not store in an environment in which dust or dirt is present



- Avoid using this product under extremely high or low temperature
store at a temperature between -20°C and $+60^{\circ}\text{C}$

Transportation Precaution

Precaution

- Do not drop or apply shock during transportation. These can cause malfunctions in the circuit breakers.
- Do not carry circuit breakers by the external wire or accessories.



- Always hold the circuit breakers by its body during transportation



- Be careful of injuries when handling sharp metal accessories



- Do not drop or apply shock during transportation



- Check the packaging condition before transportation



Service Environment

Installations

Dimensions required for installation, please refer to the catalog.

▲ Precaution

- Installations must be carried out by licensed worker.
- Check whether the circuit breaker is open before performing any wiring.
- Tighten the terminal bolt using the proper torque as specified in the manual when connecting the bus or wire. Loose connections may result in.
- Tighten the terminal bolt as proper torque specified in manual or catalog. If do not insulated, it may cause short-circuit fault.

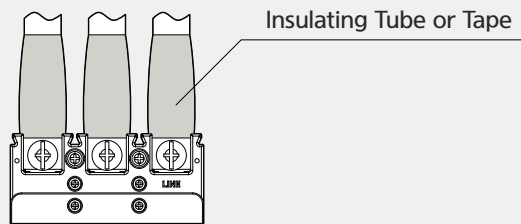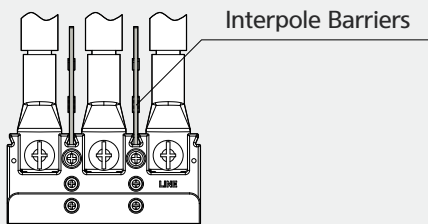

- Provide enough insulating space to avoid arc gas vent blockage. Blocked arc gas vent may cause trip operation failure.
- Do not install in an environment where hot and humid air, dust, corrosive gas, vibration and shock is present. This may cause a fire or malfunction.
- To prevent fires or malfunctions, provide appropriate measures to prevent the entry of foreign substances following installation.
- The 4P circuit breaker is designed to be connected to the neutral line with 3 wires and 4 neutral poles.
- This product is designed to be used with insulation barrier. Using with no insulation barrier may result in additional short-circuit fault.

Precautions for Installations

- **Install circuit breakers under the following environment conditions**

When installing circuit breakers, give due consideration to the environment conditions described below. Installation in inappropriate conditions may result in malfunction or fire.

- Ambient temperature: $-5\text{ }^{\circ}\text{C}$ - $+40\text{ }^{\circ}\text{C}$
(The average temperature for 24 hours not exceed $35\text{ }^{\circ}\text{C}$)
- Relative humidity: 45 - 85 %
- Vibration & Shock: Without excessive vibration and shock
- Altitude: Up to 2,000 m
- Without excessive water vapor, oil vapor, smoke, dust, salts and corrosive materials




- **Do not block the arc vent**

The breaking capacity may be reduced.



- **Keep away from dust, metal shaving**

After installations, please use protective cover when maintaining circuit.



- **Do not release insulation board from circuit breakers.**

The insulation performance may be reduced.

Precautions for Connection



- **Tighten the terminal bolts with proper torque specified in the manual**

Incomplete tightening of the terminal bolt may cause overheating. Also, excessive tightening of torque may cause damage to the terminal bolt and circuit breaker case.




- **Avoid using lube in terminal bolt**

Lube may reduce friction of terminal bolt.



- **Insulate the exposed conductor**

Insulate the MCCB conductor by using insulation tape. If the conductor is not be insulated, it may cause additional short-circuit fault.



- **Please do not modify STUD**

Rear connection type, do not force STUD. Also, when connecting wire, access without modifying STUD.



- **For 4P circuit breakers, connect 3 wires and 4 poles to the neutral line**



- **Please fasten conductor firmly in parallel**

Firmly fasten conductor to prevent electronic repulsion when a short-circuit fault occur.

Service Environment

Installations

Connections to the Power Circuit


The shock electromagnetic force caused by fault current is as follows.

The Shock Electromagnetic Force Per 1 m Conductor

Short Circuit Current [kA] (Power factor)	Shock Electromagnetic Force (3 phase)	
	Distance Between Conductors 10 cm	Distance Between Conductors 20 cm
10 (0.4)	490 (50)	245 (25)
18 (0.3)	1,863 (190)	932 (95)
25 (0.2)	4,412 (450)	2,206 (225)
35 (0.23)	8,630 (880)	4,315 (440)
42 (0.2)	12,455 (1,270)	6,277 (635)
50 (0.2)	17,652 (1,800)	8,826 (900)
65 (0.2)	29,910 (3,050)	14,955 (1,525)
85 (0.2)	51,190 (5,220)	25,595 (2,510)
100 (0.2)	70,804 (7,220)	35,402 (3,610)
125 (0.2)	110,815 (11,300)	55,408 (5,650)

- Before installation, be sure to clean on connection terminals


To prevent to increasing contact resistance, eliminate any dust, dirt or damages of any kind.

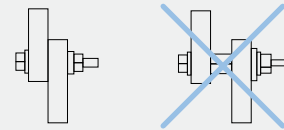

- Conductor should be connected directly

Bolts or Nuts is not allowed between conductors.

If the conductors are not connected directly, it may results in rising temperatures and fires.

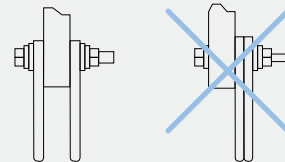

- Conductors should be connected without overlap

When connecting several conductors, the busbar should be installed on both sides.

Inspection and Maintenance

Initial Inspection

- Terminal parts shall be clean from dust, metal pieces and so on
- Breaker shall not have any crack or damage
- Check terminal parts. It should be tightened with specified torque
- Be sure to check the value of U_e , I_{cu} of the breakers
- Insulance resistance should be more than 5 MΩ

Dielectric Test

Main Circuit		Secondary and Control Circuit ¹⁾	
Rated Insulation Voltage [Ui]	Test Voltage	Rated Insulation Voltage [Ui]	Test Voltage
$U_i \leq 300$ V	2,000 V for 1 min	$U_{is} \leq 60$ V	1,000 V for 1 min
$300 < U_i \leq 600$ V	2,500 V for 1 min	60 V < $U_{is} \leq 600$ V	$2 \cdot U_{is}$ 1,000 V (최소 1,500 V) for 1 min

※ - Dielectric strength tests should be done in these conditions.

1) Between terminals and earth

Periodic Inspection

In order to maintain the breaker performance and prevent accidents, periodical inspection shall be conducted after installation and operation.

Standard of Inspection

Standard	Circumstance	Inspection Cycle after Installation
Normal	Clean air, no humidity	Within 10 years: Once 2 - 3 year
		More than 10 years: Once a year
		More than 15 years: Once 6 month
	Dust but no corrosive gas	Within 10 years: Once 1 year
		More than 10 years: Once 6 month
		More than 15 years: Once a year
Bad	Sulfurous gas, salinity, vapor	Within 5 years: Once 6 month
		More than 5 years: Once a year
	Excessive corrosive gas	Once a month

Periodic Check Point

Item of Inspection	Procedure	Trouble Shooting
Tightening terminal torque	• Tightening torque on terminals	• Applying the tightening torque indicated in manual Too strong tightening torque cause damaged
Dust and dirt	• Confirm to breaker's body and upper side of the line part. Be sure to clean in term of dust and dirt to secure insulation	• Remove the debris with a clean tool
Case	• Check for damaged and cracked on breakers	• Replace with a new breaker
Arc exhaust part	• Check terminal part for arc exhaust.	• Replace with a new breaker in case you can find the black soot and melted metal parts on the breakers
Operation	• Manually On and OFF several times in case holding close position. • It makes to reduce friction which is created harden grease and to stabilize contact resistance	• Replace with a new breaker in case malfunction on ON and OFF • Replace with a new breaker in case exceed mechanical and electrical durability
Terminal discoloration	• Check for discolored terminal and conductor parts • Be sure to confirm insulation capability on conductor parts	• There in no problem with discolored silver coating parts lightly. In case breakers have an insulation trouble caused by heat, replace with a new breaker
Insulation resistance	• Measure insulation resistance between each poles, terminal and earth	• Insulation resistance should be more than 5 MΩ, unless lower than 5 MΩ, Replace with new one

- If there is no pollution in arc exhaust parts and no other abnormality, the breaker can be re-used.
- Measure the insulation resistance when carbonizing symptom is found around arc exhaust parts. If the resistance value is more than 5MΩ, no dielectric breakdown at withstand test voltage and no excessive temperature rise of terminal parts, the breaker can be re-used.
- If the handle part is carbonized or there is metallic melting in internal of breaker, please replace it with a new one.

Service Environment

Maintenance

Trouble Shooting





In case of any abnormality during breaker operation, please refer it as below. The following table lists a series of typical service conditions, to help you understand and solve hypothetical faults or malfunctions.

Problem	Symptom	Possible Cause	Trouble Shooting
Overheating	High temperature of terminal part	• Loose connection between terminal and conductor	Mounting screw with proper torque
		• Increased resistance between terminal and conductor	Replace with a new breaker
	Damage in insulation part of terminal	• Loose connection between terminal and conductor	Replace with a new breaker
Overheating	High temperature of breaker body	• Loose connection on terminal parts caused by interference with foreign substance	Replace with a new breaker
		• Increased contact resistance	
		• Loose internal assembly screws	
Overheating	Abnormal voltage of load side	• Increase of current density from cable disconnection	Replace with a new breaker
		• Excessive contact abrasion	
		• Foreign substances on contact	
Inability of ON, OFF, and RESET	Inability of ON	• Melt down on conducting bar (Corrosion of conductor by excessive ON-OFF or corrosive gas)	Replace with a new breaker
		• Inability of reset after trip	
		• Damaged trip mechanical parts due to lots of operation and improper frequency	
	Inability of OFF	• Non-energized UVT	Input operational control voltage
		• Melted and adhered contact tip	Replace with a new breaker
	Inability of RESET	• Non-energized UVT	Input operational control voltage
		• Not enough cooling on bi-metal	Cool down ambient temperature, then Reset
		• Corruption and deformation bi-metal	Replace with a new breaker
		• Malfunction of mechanical parts	
		• Run out of excessive ON-OFF	
Frequent trip	Trip at under rated current	• Damaged mechanical parts after trip on over-breaking capacity	Replace with a new breaker
		• High ambient temperature (Higher than 40)	
		• Heating by loose terminal screw connection	
		• Heating from inside of breaker	
	Trip at operational current	• Smaller connection conductor than specified size	Use the specified size of conductor or adjust the rated current
		• Trip at start-up inrush current	Adjust the instantaneous trip setting or replace with a higher rated current breaker
		• Trip at change-over in star-delta operation	
		• Instantaneous trip at reverse feeding	Replace with a higher rated current breaker
		• Instantaneous trip at high inrush current	
		• Instantaneous trip at long starting current	
• Short-circuit due to motor malfunction	Repair or replace with new motors and check a wiring cables		
• Fault of connecting with SHU or UVT			
Non trip	Non trip at the current higher than specified	• Low coordination with primary protect device or miss-selected with other protect device	Reconsider of coordination
		• Unconsidered ambient temperature	Confirm the derating current
		• Improper rated current	Confirm rated current
Malfunction of Accessory	Malfunction of SHT	• Over and under control voltage	Confirm rated voltage
		• Drop of the control voltage	Keep control
		• Incorrect coil voltage, damaged coil caused by non operating of switch in order to prevent malfunctioning	Replace with new parts
	Malfunction of UVT	• Malfunction of mechanism part	Replace with new parts
		• Incorrect coil voltage	Confirm control voltage
		• Burned UVT controller of the coil	Replace or check for wiring
	Malfunction of AUX and ALT	• Damaged contact caused by excessive rated operational current	Replace or check for operational current
		• Malfunction of mechanism part	Replace or repair

Certifications

Molded Case Circuit Breakers (MCCB)









Certifications

Type		Approvals			CE Certificates
Certificate		Safety Certi	KS	IEC (CE)	DEKRA
Mark					
Country		KOREA	KOREA	EUROPE	NETHERLANDS
HGM30	E	•	•	•	•
	S	•	•	•	•
HGM50	E	•	•	•	•
	S	•	•	•	•
	H	•	•	•	•
	L	•	•	•	•
HGM60	E	•	•	•	•
	S	•	•	•	•
	H	•	•	•	•
	L	•	•	•	•
HGM100	E	•	•	•	•
	S	•	•	•	•
	H	•	•	•	•
	L	•	•	•	•
HGM125	E	•	•	•	•
	S	•	•	•	•
	H	•	•	•	•
	L	•	•	•	•
HGM160	E	•	•	•	•
	S	•	•	•	•
	H	•	•	•	•
	L	•	•	•	•
HGM250	E	•	•	•	•
	S	•	•	•	•
	H	•	•	•	•
	L	•	•	•	•
HGM400	E	•	•	•	•
	S	•	•	•	•
	H	•	•	•	•
	L	•	•	•	•
HGM630	E	•	•	•	•
	S	•	•	•	•
	H	•	•	•	•
	L	•	•	•	•
HGM800	S	•	•	•	•
	H	•	•	•	•
	L	•	•	•	•

Certifications





Molded Case Circuit Breakers (MCCB)

Marine Certifications

Type		Approvals							
Certificate		KR	LR	BV	ABS	GL (CE)	DNV	RINA	ClassNK
Mark									
Country		KOREA	U.K	FRANCE	U.S.A	GERMANY	NORWAY	ITALY	JAPAN
HGM30	E	●	●	●	●	●	●	●	●
	S	●	●	●	●	●	●	●	●
HGM50	E	●	●	●	●	●	●	●	●
	S	●	●	●	●	●	●	●	●
	H	●	●	●	●	●	●	●	●
	L	●	●	●	●	●	●	●	●
HGM60	E	●	●	●	●	●	●	●	●
	S	●	●	●	●	●	●	●	●
	H	●	●	●	●	●	●	●	●
	L	●	●	●	●	●	●	●	●
HGM100	E	●	●	●	●	●	●	●	●
	S	●	●	●	●	●	●	●	●
	H	●	●	●	●	●	●	●	●
	L	●	●	●	●	●	●	●	●
HGM125	E	●	●	●	●	●	●	●	●
	S	●	●	●	●	●	●	●	●
	H	●	●	●	●	●	●	●	●
	L	●	●	●	●	●	●	●	●
HGM160	E	●	●	●	●	●	●	●	●
	S	●	●	●	●	●	●	●	●
	H	●	●	●	●	●	●	●	●
	L	●	●	●	●	●	●	●	●
HGM250	E	●	●	●	●	●	●	●	●
	S	●	●	●	●	●	●	●	●
	H	●	●	●	●	●	●	●	●
	L	●	●	●	●	●	●	●	●
HGM400	E	●	●	●	●	●	●	●	●
	S	●	●	●	●	●	●	●	●
	H	●	●	●	●	●	●	●	●
	L	●	●	●	●	●	●	●	●
HGM630	E	●	●	●	●	●	●	●	●
	S	●	●	●	●	●	●	●	●
	H	●	●	●	●	●	●	●	●
	L	●	●	●	●	●	●	●	●
HGM800	S	●	●	●	●	●	●	●	●
	H	●	●	●	●	●	●	●	●
	L	●	●	●	●	●	●	●	●

Earth Leakage Circuit Breakers (ELCB)

Certifications

Type		Approvals			CE Certificates
Certificate		Safety Certi	KS	IEC (CE)	DEKRA
Mark					
Country		KOREA	KOREA	EUROPE	NETHERLANDS
HGE30	E	•	•	•	•
	S	•	•	•	•
HGE50	E	•	•	•	•
	S	•	•	•	•
	H	•	•	•	•
	L	•	•	•	•
HGE60	E	•	•	•	•
	S	•	•	•	•
	H	•	•	•	•
	L	•	•	•	•
HGE100	E	•	•	•	•
	S	•	•	•	•
	H	•	•	•	•
	L	•	•	•	•
HGE125	E	•	•	•	•
	S	•	•	•	•
	H	•	•	•	•
	L	•	•	•	•
HGE160	E	•	•	•	•
	S	•	•	•	•
	H	•	•	•	•
	L	•	•	•	•
HGE250	E	•	•	•	•
	S	•	•	•	•
	H	•	•	•	•
	L	•	•	•	•
HGE400	E	•	•	•	•
	S	•	•	•	•
	H	•	•	•	•
	L	•	•	•	•
HGE630	E	•	•	•	•
	S	•	•	•	•
	H	•	•	•	•
	L	•	•	•	•
HGE800	S	•	•	•	•
	H	•	•	•	•
	L	•	•	•	•



www.hyundai-elec.com

HYUNDAI | ELECTRO ELECTRIC SYSTEMS HEAVY INDUSTRIES

Head Office	1000, Bangeojinsunhwan-doro, Dong-gu, Ulsan, Korea Tel: 82-52-202-8101~7 Fax: 82-52-202-8100
Seoul (Sales & Marketing)	75, Yulgok-ro, Jongno-gu, Seoul, Korea Tel: 82-2-746-8519, 7492, 7620 Fax: 82-2-746-7441
Atlanta	6100 Atlantic Boulevard, Norcross, GA 30071, USA Tel: 1-678-823-7839 Fax: 1-678-823-7553
London	2nd Floor, The Triangle, 5-17 Hammersmith Grove London, W6 0LG, UK Tel: 44-20-8741-0501 Fax: 44-20-8741-5620
Moscow	World Trade Center, Ent. 3# 703, Krasnopresnenskaya Nab. 12, Moscow, 123610, Russia Tel: 7-495-258-1381 Fax: 7-495-258-1382
Tokyo	8th Floor, North Tower Yurakucho Denki Bldg., 1-7-1 Yuraku-cho, Chiyoda-ku, Tokyo 100-0006, Japan Tel: 81-3-3211-4792 Fax: 81-3-3216-0728
Osaka	I-Room 5th Floor Nagahori Plaza Bldg. 2-4-8 Minami Senba, Chuo-ku, Osaka, 542-0081, Japan Tel: 81-6-6261-5766~7 Fax: 81-6-6261-5818
Riyadh	Office No. 230, 2nd Floor, 4th Akariya Plaza, Olaya Street, PO Box 8072, Riyadh 11485, Saudi Arabia Tel: 966-11-464-4696 Fax: 966-11-462-2352
Dubai	Unit 205, Building 4, Emaar Square, Sheikh Zayed Road, Pobox 252458, Dubai, UAE Tel: 971-4-425-7995 Fax: 971-4-425-7996
Sofia	1271 Sofia 41, Rojen Blvd., Bulgaria Tel: 359-2-803-3200, 3220 Fax: 359-2-803-3203
Alabama	215 Folmar Parkway, Montgomery, AL 36105, USA Tel: 1-334-481-2000 Fax: 1-334-481-2098
Ohio	330 East First Street, Mansfield, OH 44902 USA Tel: 1-724-759-7445 Fax: 1-419-522-9386
Vladivostok	15 str. Potemkina, Artem, Primorskiy Krai, 692760, Russia Tel: 7-423-201-0110 Fax: 7-423-201-0110
Yangzhong	No.9 Xiandai Road, Xinba Scientific and Technologic Zone, Yangzhong, Jiangsu, P.R.C. Zip: 212212, China Tel: 86-511-8842-0666, 0212 Fax: 86-511-8842-0668, 0231