



# HGM1250, 1600

## Molded Case Circuit Breakers

# Model Selection Table

Things in common	
Rated insulation voltage, Ui	1000 V
Rated operational voltage, Ue	690 V
Impulse withstand voltage, Uimp	8 kV
Protection function	Overload, short-circuit and instantaneous protection

Things in common	
Suitability for isolation	Yes
Utilization category	B
Pollution degree	3
Reference standard	IEC60947-2

Model			HGM1000	HGM1250	HGM1600
Frame	(AF)		1,000	1,250	1,600
Pole	(P)		3,4 <sup>1)</sup>	3,4 <sup>1)</sup>	3
Rated current, at 40°C, Electric	(A)		1,000	1,000/1,250	1,600
Rated short-circuit breaking capacity [Icu] (kA rms)	Recognition code for order		S	S	S
	AC660/690 V		25	25	25
	AC480/500 V		35	35	35
	AC440/460 V		45	45	45
	AC380/415 V		70	70	70
	AC220/240 V		100	100	100
Service breaking capacity [Ics] (kA rms)	AC660/690 V		12.5	12.5	17.5
	AC480/500 V		17.5	17.5	24.5
	AC440/460 V		22.5	22.5	31.5
	AC380/415 V		65	65	50
	AC220/240 V		50	50	70
Rated short-time withstand current[Icw] (kA) 1s			15	15	12*In
Endurance (Durability)	Mechanical		10,000	10,000	10,000
	Electrical		3,000	3,000	3,000
Trip Device					
Electronic			●	●	●
	Long time [LT, I <sub>t</sub> ]		0.4-0.5-0.6-0.7-0.8-0.9-0.95-1×In	0.4-0.5-0.6-0.7-0.8-0.9-0.95-1×In	0.4-0.5-0.6-0.7-0.8-0.9-0.95-1×In
	Short time [STD, I <sub>s</sub> ]		2-3-4-5-6-7-8-10×I <sub>t</sub>	2-3-4-5-6-7-8-10×I <sub>t</sub>	2-3-4-5-6-7-8-10×I <sub>t</sub>
	Instantaneous [INST, I <sub>3</sub> ]		2-3-4-5-6-7-8-10×I <sub>t</sub>	2-3-4-5-6-7-8-10×I <sub>t</sub>	2-3-4-5-6-7-8-10×I <sub>t</sub>
Accessory					
Internal	Auxiliary switch	AUX	●	●	●
	Alarm switch	ALT	●	●	-
	Shunt trip	SHT	●	●	●
	Undervoltage trip	UVT	●	●	●
	Rotary handle	Extended TFH	●	●	-
External	Motor operator	MOT	●	●	●
	Mechanical interlock	MIF	●	●	-
	Lock Mechanism with Key		●	●	-
	Draw-out		-	-	-
	Plug-in	TDM(LINE/LOAD)	-	-	-
		TDM(LINE Only)	-	-	-
	Cage terminal block	CTB	●	●	-
	Insulation terminal cover	TCF	●	●	●
	Insulation barrier	TQQ	Standard	Standard	Standard
	Terminal extensions	TBB	Standard	Standard	Standard
Installation and dimensions					
Connection/Installation	Front connection		Terminal busbar	Terminal busbar	Terminal busbar
	Rear connection		-	-	-
	Plug-in		-	-	-
Dimensions (mm)	a (3/4P)		210/280	210/280	210
	b		370	370	370
	c		124	124	155

※ 1) 4 pole arrangement : Basic specification is N-R-S-T



# Product Features

## HGM1000/1250/1600


The HGM type maximizes diversity in product selection by developing a variety of products.

In addition, the newly developed HGM1250&1600 MCCB is an electronic type, so its characteristics can be adjusted.


### 1250/1600AF

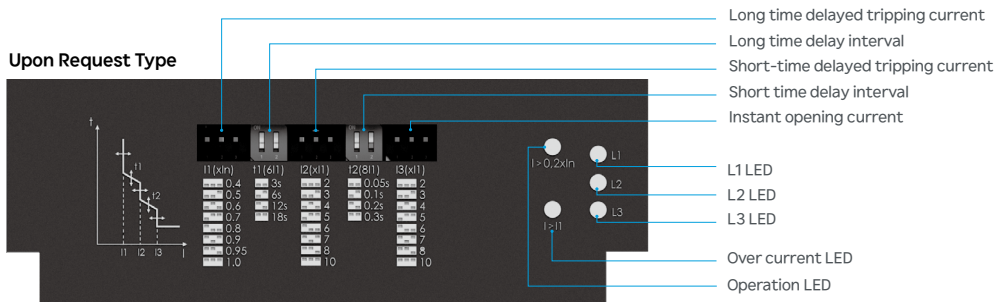


- The desired value can be set between %40 and %100 of  $I_1$  switch and  $I_n$  breaker value.




- Long time delay setting range is from 3~18 seconds. As tripping on  $I_1$  is time switched, tripping formula for over current outside  $I_1$  (Tripping time) =  $[(6I_1)^2 \times t_1] / I^2$




- $I_2$  switches may be adjusted in 2 to 10 times the current  $I_1$



- $I^2t$  "ON"; There are time delay in proportion with  $(8xI_1)^2$  at the "ON" section. Card detects period of time in inverse proportion with the square root of the tripping current. (Tripping time) =  $[(8xI_1)^2 / I^2] \times t_2$



- $I_3$  switch can be adjusted between 2 and 10 times the current  $I_1$ . There is no any delay function.



- L1, L2, L3: Indicates on which phase the over current passes through.
- $I > 0.2xI_n$ : Indicates that the card is operational and current passes through the circuit breaker.
- $I > I_1$ : Indicates that current passes through the circuit breaker and if the situation does not return to normal, In accordance with release curve the circuit breaker will trip after a while.





# Dimensions




## HGM1000/1250

Unit : mm


3P

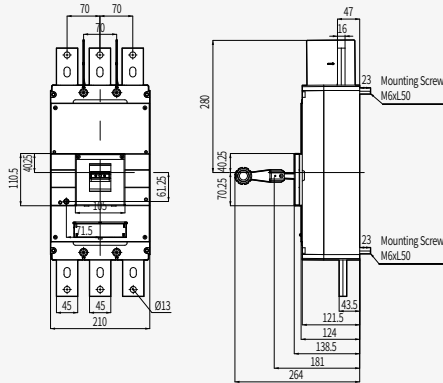


4P

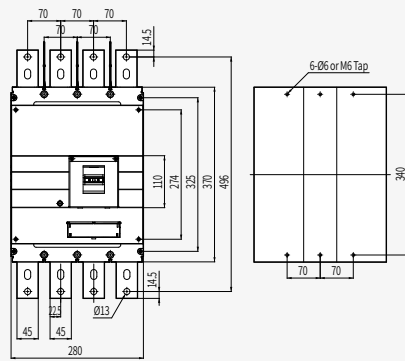


Dimension of Panel Cover Cutting - Handle Exposure




Dimension of Panel Cover Cutting - Handle Test Button Exposure




Dimension of Panel Cover Cutting - Handle Trip Unit Exposure



Dimension of Panel Cover Cutting - Handle Exposure








Dimension of Panel Cover Cutting - Handle Test Button Exposure




Dimension of Panel Cover Cutting - Handle Trip Unit Exposure

## HGM1600


Unit : mm

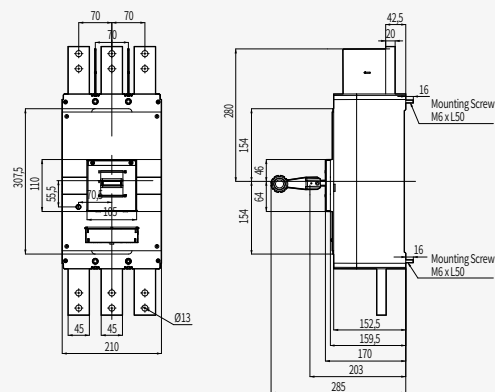



Dimension of Panel Cover Cutting - Handle Exposure



Dimension of Panel Cover Cutting - Handle Test Button Exposure




Dimension of Panel Cover Cutting - Handle Trip Unit Exposure




# Characteristic Curve


## Operation Characteristic Curve

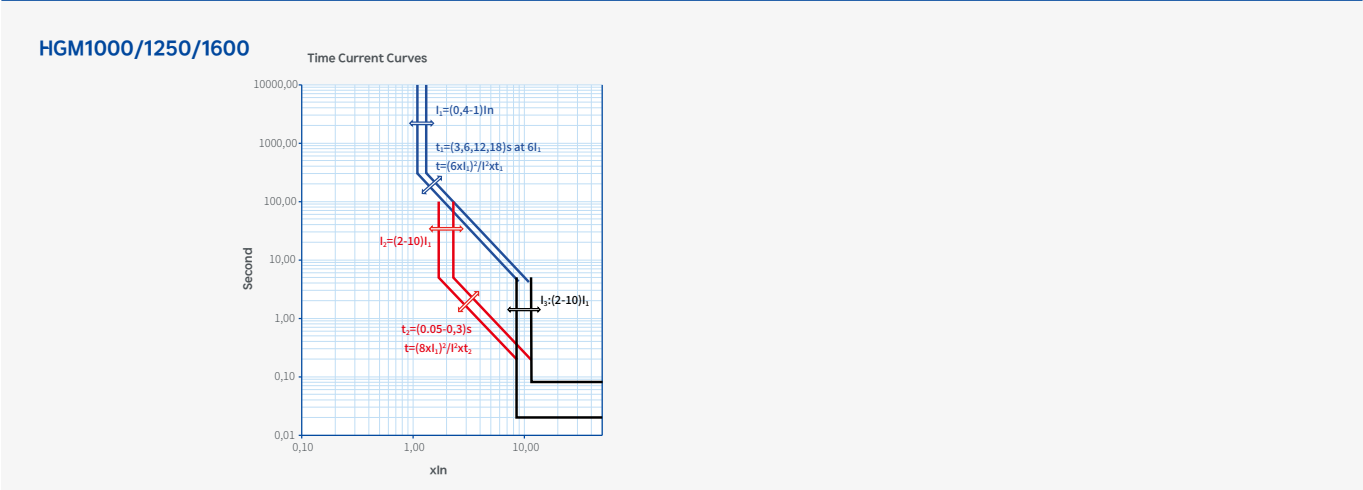

## Energy-Limiting Characteristic Curve

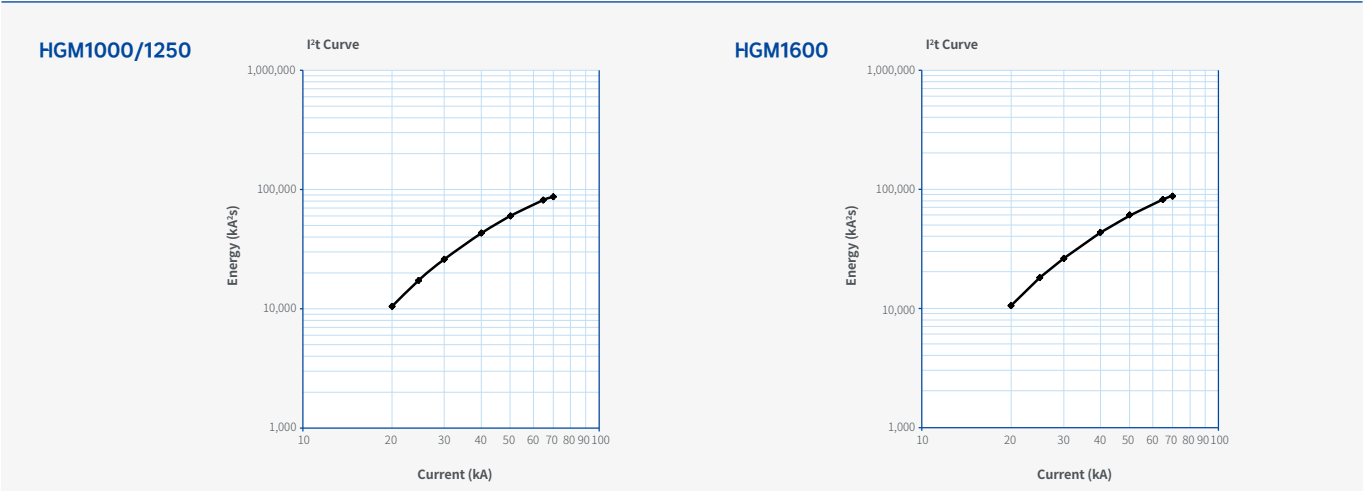


## Current-Limiting Characteristic Curve

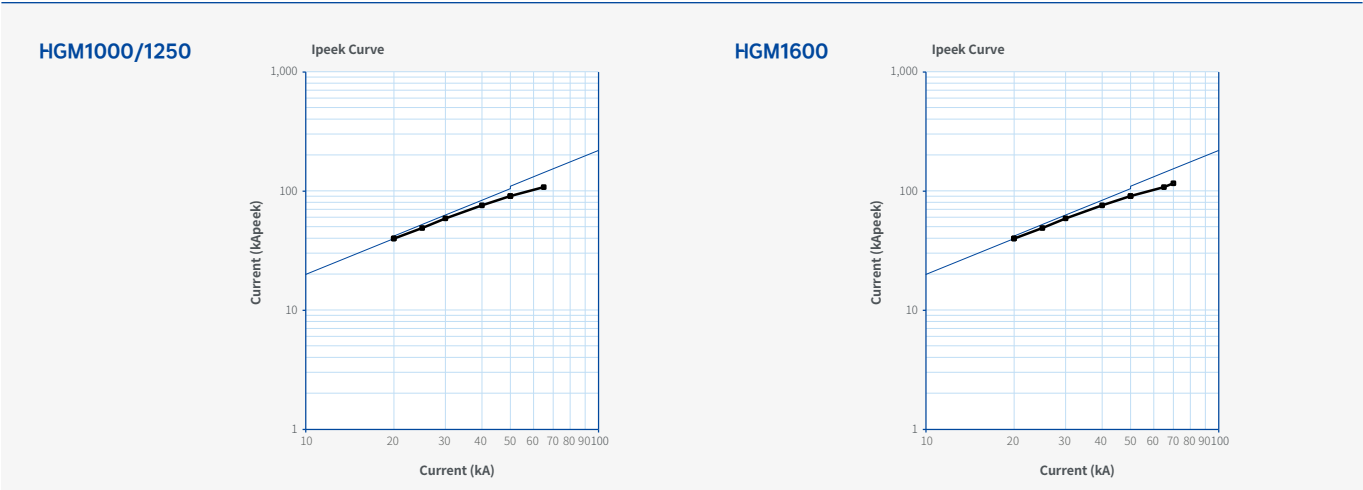

# Order Information

## Ordering Guidelines

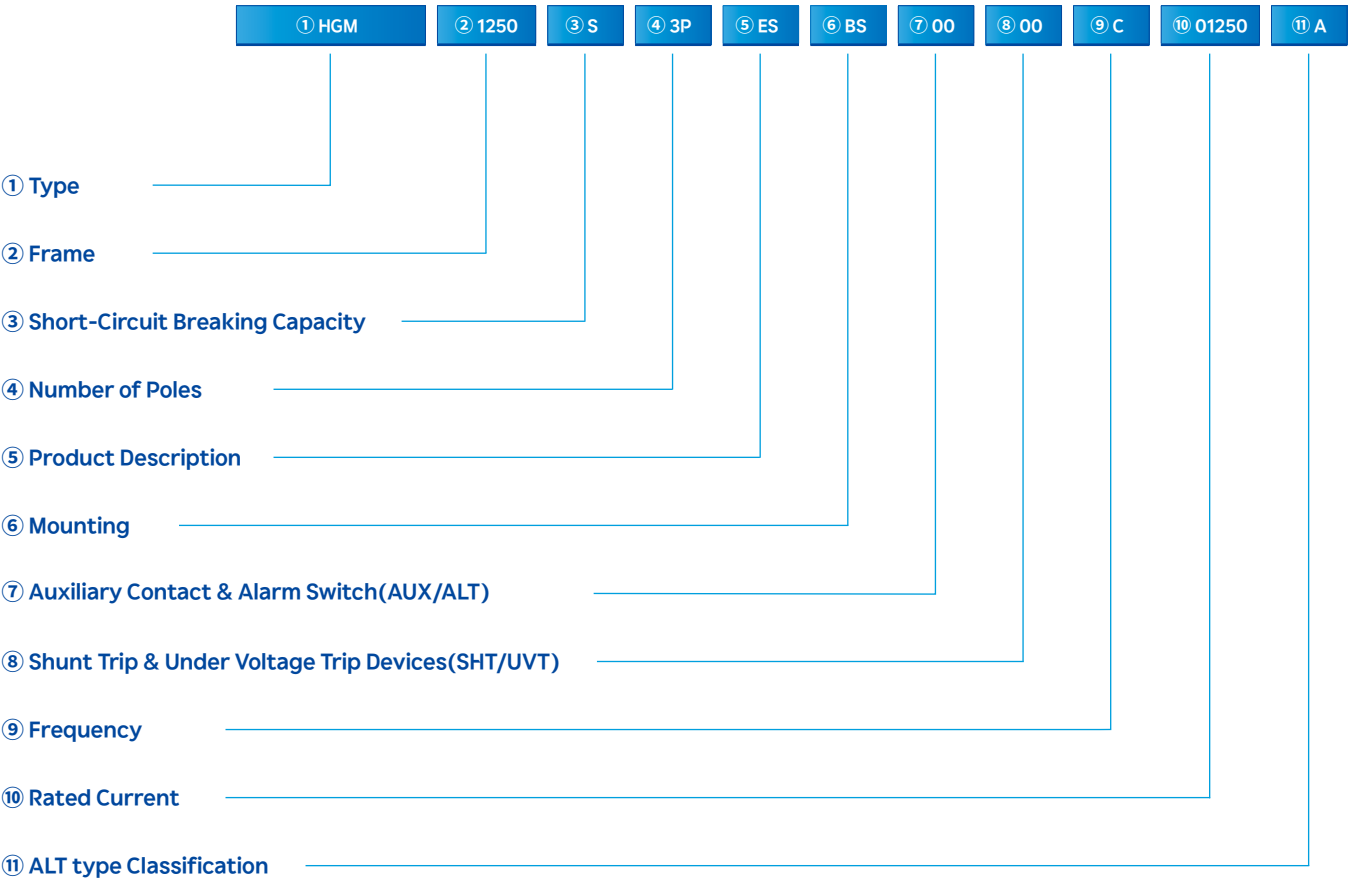

① Type		④ Number of Poles		⑦ Auxiliary Contact & Alarm Switch(AUX/ALT)		⑩ Rated Current	
HGM	MCCB	3P	3 pole	00	Without	01000	1,000 A
		4PN <sup>2)</sup>	4 pole(NRST)			01250	1,250 A
						01600	1,600 A
② Frame		⑤ Product Description		⑧ Shunt Trip & Under Voltage Trip Devices(SHT/UVT)		⑪ ALT type Classification	
1000	1,000 AF	MCCB	Electronic	00	Without	A	ALT mounting available
1250	1,250 AF	ES	Dip switch type				
1600	1,600 AF						
③ Short-Circuit Breaking Capacity <sup>1)</sup>		⑥ Mounting		⑨ Frequency			
S	70 kA	BS <sup>3)</sup>	Terminal Bus Bar (Straight Type)	C	50/60 Hz in common		

※ 1) In case that the rated voltage is AC380/415 V  
2) In case of 4P, The N phase is located on the left.(N-R-S-T)  
3) A straight busbar is provided as standard.

## Order Code for Accessories of HGM1000/1250/1600

### ① Signal

※ It is contact for indicating the status of the circuit breaker in a remote position.  
This contact can be used realize not only the indication function but also electrical functions such as electrical lock and relay.

Product	HGM1000/1250	HGM1600	Note
Auxiliary Switch	AUX120GMS1	AUX160NER1	<ul style="list-style-type: none"> <li>Indicates the ON/OFF status of the circuit breaker contact.</li> <li>Status is OFF during TRIP.</li> </ul>
	AUX120GMS2	AUX160NER2	
Trip Alarm Switch	ALT120GMSR1	-	<ul style="list-style-type: none"> <li>It is only activated when the circuit breaker has tripped due to an overload, short circuit or operation of shunt trip switch and does not operate during general ON/OFF.</li> <li>Returns to original state when circuit breaker has been reset.</li> </ul>
Under Voltage Trip	UVT120GMSAC100-120V	UVT160NEP	<ul style="list-style-type: none"> <li>In case the circuit voltage drops to less than 35% of the rated voltage (Un), UVT automatically initiates a trip in the circuit breaker to prevent damage to the load.</li> <li>Operation condition : <math>U &lt; 0.7 \times U_n</math></li> <li>Closing condition : <math>U \geq 0.85 \times U_n</math></li> </ul>
	UVT120GMSAC200-230V		
	UVT120GMSAC380-415V		
	UVT120GMSAC440-480V		
Shunt Trip	SHT120GMSAC100-120V	-	<ul style="list-style-type: none"> <li>Shunt trip device (SHT) is a device that remotely trips the circuit breaker by applying voltage to both terminals of the coil.</li> <li>Opening condition : <math>0.7 \times U_n \leq U &lt; 1.1 \times U_n</math></li> </ul>
	SHT120GMSAC200-230V	-	
	SHT120GMSAC380-415V	-	
	SHT120GMSAC440-480V	-	

### ② Operating

Product	HGM1000/1250		HGM1600
	3P	4P	3P
Motor Operator	MOT120GMSAC/DC230V		MOT160GMSAC/DC230V
Operating Handle (Extended)	TFH120GMS3	TFH120GMS4	-
Auxiliary Handle	THA120GMS		-

### ③ Motor Operator Technical Data

Product	Order Code	Mechanical Life	Operational Voltage	Voltage Range	Max Operational Current(A)	Operating Time(s)		Power Consumption(W)
						Closing	Opening	
MOT120GMSAC/DC230V	MOT120GMSAC/DC230V	5000	230V AC/DC	85-110%	0.75	1	1	165
MOT160GMSAC/DC230V	MOT160GMSAC/DC230V	5000	230V AC/DC	85-110%	0.75	1	1	165

### ④ Terminal

Product	HGM1000/1250	
	3P	4P
Terminal Cover	TCF120GMSS3	TCF120GMSS4
Terminal Barrier	TQQ120GMS3	TQQ120GMS4

### ⑤ Possible Installation Combinations

Type	Pole	AUX	ALT	SHT	UVT	AXT	AUX ALT	SHT AUX	UVT AUX	SHT ALT	UVT ALT	SHT AXT	UVT AXT
HGM1000 HGM1250	3,4												

※ AUX : Auxiliary Switch / ALT : Alarm Switch / SHT : Shunt Trip / UVT : Under-Voltage Trip   
AXT : Auxiliary Alarm Switch (AUX/ALT Integrated Type)

## Korea

<b>R&amp;D Center</b> (Sales & Marketing)	477, Bundangsuseo-ro, Bundang-gu, Seongnam-si, Gyeonggi-do, Republic of Korea	Tel: +82-2-479-9180	Fax: +82-2-500-4958
<b>Factory</b>	53, Je3gongdan 3-gil, Seoun-myeon, Anseong-si, Gyeonggi-do, 17605, Republic of Korea	Tel: +52-202-8179	Fax: +82-52-202-8100

## Branch Offices

<b>Osaka</b>	1-Room 5th Floor Nagahori Plaza Bldg. 2-4-8 Minami Senba, chuo-ku, Osaka 542-0081, Japan	Tel: +81-6-6261-5766~7	Fax: +81-6-6261-5818
<b>Moscow</b>	World Trade Center, Ent.6, #412, Krasnopresnenskaya Nab.12, Moscow, 123610, Russia	Tel: +7-495-258-1381	
<b>Dubai</b>	Unit 205, Emaar Square Building NO.4 Sheikh Zayed Road, Dubai 252458, U.A.E	Tel: +971-4-425-7995	Fax: +971-4-425-7996
<b>Riyadh</b>	Office 404, 4th Floor Akaria-2 Bldg., Olaya St., PO Box 9187, Riyadh 11413, KSA	Tel: +966-(0)11-210-1107	
<b>Frankfurt</b>	Hyundai Electric & Energy Systems Co., Ltd. Eschborner Landstrasse 55, 60489 Frankfurt am Main, Germany	Tel: +49-69-7490-3934	
<b>Bangkok</b>	19th Floor, Unit 1908, Sathorn Square Office Tower, 98 North Sathorn Road, Silom, Bangrak, Bangkok 10500, Thailand	Tel: +66-02-115-7920	Fax: +66-2-115-7898
<b>Ho Chi Minh</b>	Centec Tower #1405, 72 Nguyễn Thị Minh Khai, Phường 6, Quận 3, Thành phố Hồ Chí Minh, Vietnam	Tel: +84-28-3535-0465	