



DIN 22.5mm

Features :

- True Power OFF Delay
- LED Indications : Power ON
- Finger Safe Terminals

Display Specifications

LED Indications	Power ON
-----------------	----------

Input Specifications

Accuracy	Setting : $\pm 10\%$ of F.S. Repeat : $\pm 2\%$ or 100msec whichever is greater (F.S. = Full Scale)
----------	---

Output Specifications

Relay Contact	2 C/O DPDT
Contact Rating	2.5A @ 250V AC / 28V DC, Resistive load $\pm 10\%$ for both V & I

Functional Specifications

Modes	True Power OFF Delay
Time Ranges	180sec
Reset	On power interruption, Reset time < 100msec

Auxiliary Supply Specifications

Supply Voltage	110 to 240V AC / DC (50 / 60Hz) -15% to 10% tolerance
Power Consumption	2.5VA max


Environmental Specifications

Temperature	Operating : 0 to 50°C (32 to 122°F) Storage : -20 to 75°C (-4 to 167°F)
Humidity (non - condensing)	95% RH


Mechanical Specifications

Mounting	DIN Rail Mount
Weight	115gms


Dimensions

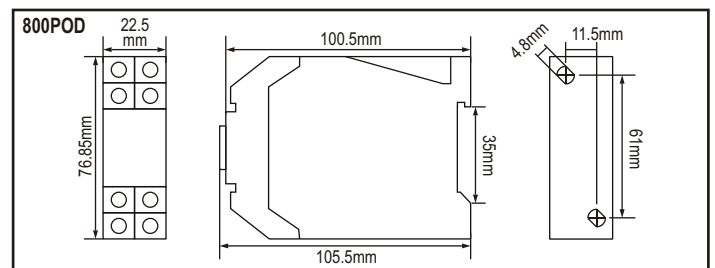

Terminal Connections

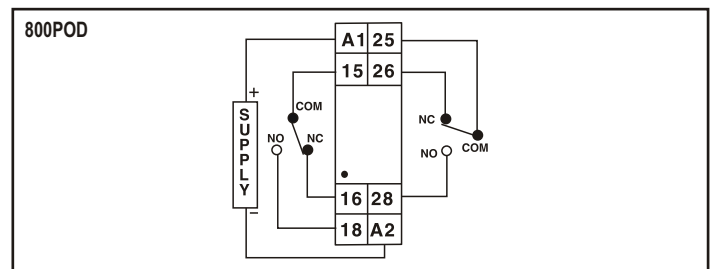

Timing Diagram

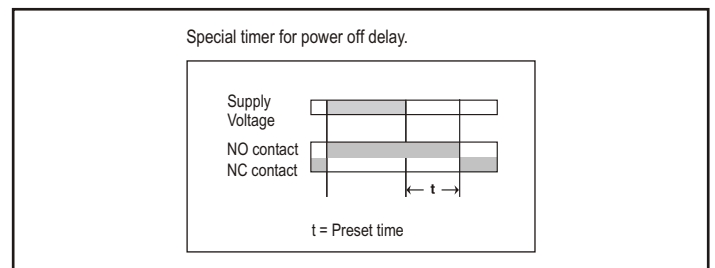

Ordering Information

Product Code	Supply Voltage
800POD-180S	110 to 240V AC / DC

OPERATING INSTRUCTIONS

800POD



Please maintain these instructions and review them prior to using the unit:

⚠ Warning :

- The Equipment is built-in type with Class II construction and is protected by Reinforced Insulation. Terminals are a part of the front panel and are protected by means of finger guards. Finger guards are not to be removed during wiring, installation, operation or maintenance.
- The power should be turned off while wiring and maintenance to prevent the risk of electric shock. Do not touch any terminals when the power is ON.
- Wiring shall be done strictly according to the terminal layout with shortest connections.
- Fuse Protection: The equipment does not have Built-in fuse. External fuse of rating 275 VDC/1 A is recommended.

⚠ Caution:

- This unit is not intended for outdoor use.
- The power connection cable must have a cross-section of at least 1sq.mm and insulation capacity of at least 1.5kV. Use lugged terminals to meet M3 screws.
- The output connections must not be loaded beyond the specified values/range.
- Avoid inflow of dust and contact of conductive material with the internal circuitry of the unit.
- Clean the equipment with a clean, soft cloth. Do not use any organic solvents for cleaning.

SPECIFICATIONS

Supply Voltage

110 V to 240 VAC. (tolerance : -15 to +10% AC: 50 or 60 Hz).

Delay Modes

True power off delay.

Time range

180 sec (factory set).

Output Contact

2 NO/NC.

Accuracy

Setting: $\pm 10\%$ of full scale.
Repeat: $\pm 2\%$ or 100 msec whichever is greater.

Led indication

Power 'ON'.

Reset time

100 ms.

Relay rating

2.5 A @250 VAC / 28 VDC,
Resistive load $\pm 10\%$ for both V & I.

Mounting

Din rail / Screw mounting.

Size (in mm)

22.5(W) x 75(H) X 101(D).

Housing

CE marked products: Flame retardant plastic.

Non CE products: ABS plastic.

Temperature

Operating: 0°C to 50°C.

Storage: - 20°C to 75°C.


Humidity

Up to 95% RH.

Weight

115 grams.


PANEL DIMENSIONS

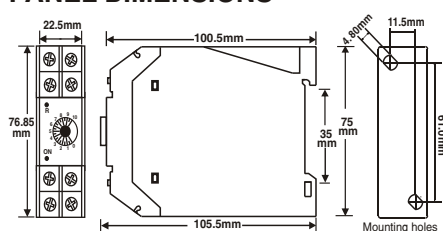

TYPICAL LOAD CONNECTIONS

1. For load current less than 0.5A

2. For bigger loads, use interposing relay / Contactor

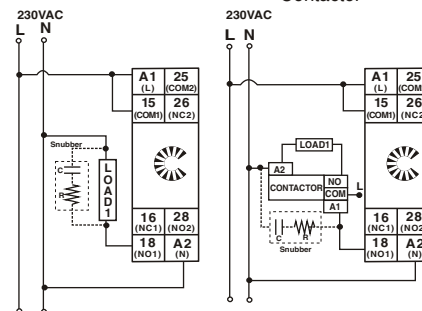


1) Snubber Part No.: APRC - 01.


2) MOV Part No.: AP-MOV - 03.

Note: Use snubber as shown above to increase the life of internal relay.

TERMINAL CONNECTIONS

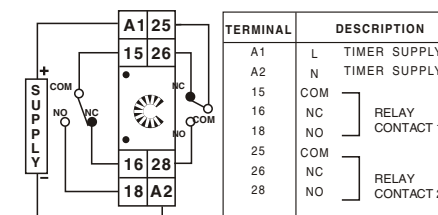

OPERATING MODE:



(Specifications subject to change as development is a continuous process)

SELECTRON Process Controls Pvt. Ltd., India,

Tel : 91-22-28476443, Fax:91-22-28471733,

Website: www.selecindia.com; E- mail: sales@selecindia.com

Document name: Operating / 0511/800POD / Version 1a OP100 - V01a